

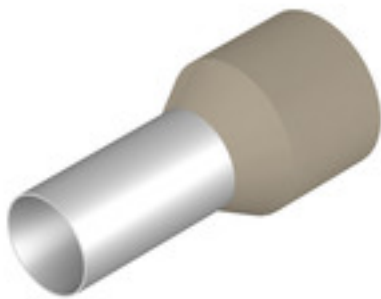
H35,0/30 S BE**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Similar to illustration

- Polypropylene conical cable entry funnel
- Heat-resistant up to 105°C

For conductors from 0.5 – 10.0 mm² (AWG 20-7)

Material: E-Cu, tin galvanised

Dimensional tolerance acc. to DIN 46228 sect. 4

General ordering data

Version	Wire-end ferrule, insulated, 19 mm, 16 mm, beige
Order No.	1418030000
Type	H35,0/30 S BE
GTIN (EAN)	4050118221237
Qty.	50 pc(s).
Packaging	loose

H35,0/30 S BE**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight	1.844 g
------------	---------

Technical data

Description of article	Wire-end ferrules with plastic collar, special size, colour beige	Version	insulated
------------------------	---	---------	-----------

Wire-end ferrules

Collar diameter (D2)	12.7 mm	Colour code	Weidmüller
Conductor cross-section	35 mm ²	Contact surface diameter (D1)	8.3 mm
Contact surface length (L2)	16 mm	L1 in mm	30 mm
Metal sleeve thickness (S1)	0.2 mm	Plastic collar thickness (S2)	0.4 mm
Stripping length	19 mm	Wire connection cross section AWG, max.	AWG 2

Classifications

ETIM 6.0	EC000005	ETIM 7.0	EC000005
ECLASS 9.0	27-40-02-01	ECLASS 9.1	27-40-02-01
ECLASS 10.0	27-40-02-01	ECLASS 11.0	27-40-02-01

Approvals

Approvals



ROHS	Conform
UL File Number Search	E354986

Downloads

Engineering Data	EPLAN
User Documentation	Technical information - EN Technical information - DE

H35,0/30 S BE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Drawing

