

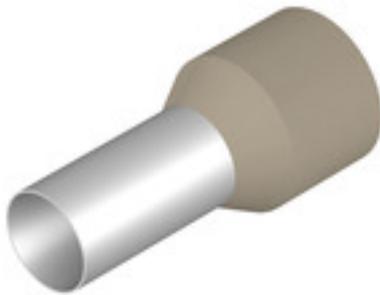
**H35,0/32 S BE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Similar to illustration**

- Polypropylene conical cable entry funnel
  - Heat-resistant up to 105°C
- For conductors from 0.5 – 10.0 mm<sup>2</sup> (AWG 20-7)  
Material: E-Cu, tin galvanised  
Dimensional tolerance acc. to DIN 46228 sect. 4

**General ordering data**

Version	Wire-end ferrule, insulated, 21 mm, 18 mm, beige
Order No.	<a href="#">1418340000</a>
Type	H35,0/32 S BE
GTIN (EAN)	4050118221725
Qty.	50 pc(s).
Packaging	loose

Creation date March 23, 2021 10:00:00 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**H35,0/32 S BE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Net weight 2.02 g

**Technical data**

Description of article	Wire-end ferrules with plastic collar, special size, colour beige	Version	insulated
------------------------	---	---------	-----------

**Wire-end ferrules**

Collar diameter (D2)	12.7 mm	Colour code	Weidmüller
Conductor cross-section	35 mm <sup>2</sup>	Contact surface diameter (D1)	8.3 mm
Contact surface length (L2)	18 mm	L1 in mm	32 mm
Metal sleeve thickness (S1)	0.2 mm	Plastic collar thickness (S2)	0.4 mm
Stripping length	21 mm	Wire connection cross section AWG, max.	AWG 2

**Classifications**

ETIM 6.0	EC000005	ETIM 7.0	EC000005
ECLASS 9.0	27-40-02-01	ECLASS 9.1	27-40-02-01
ECLASS 10.0	27-40-02-01	ECLASS 11.0	27-40-02-01

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	E354986

**Downloads**

Engineering Data	<a href="#">EPLAN</a>
User Documentation	<a href="#">Technical information - EN</a> <a href="#">Technical information - DE</a>

**Data sheet**

**H35,0/32 S BE**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

**Drawing**

