

SSR 10-32VDC/0-35VDC 5A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Similar to illustration

Individual relays for TERMSERIES

- Solid-state relays
- Different output versions

General ordering data

Version	TERMSERIES, solid-state relays, 1 NO contact (MOS-FET), Rated control voltage: 10...32 V DC , Rated switching voltage: 0...35 V DC, Continuous current: 5 A, Plug-in connection
Order No.	1421450000
Type	SSR 10-32VDC/0-35VDC 5A
GTIN (EAN)	4050118235302
Qty.	20 pc(s).

Creation date March 23, 2021 10:04:08 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

SSR 10-32VDC/0-35VDC 5A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	15.7 mm	Depth (inches)	0.618 inch
Height	29 mm	Height (inches)	1.142 inch
Net weight	9.87 g	Width	12.7 mm
Width (inches)	0.5 inch		

Temperatures

Storage temperature	-40 °C...100 °C	Operating temperature	-20 °C...80 °C
---------------------	-----------------	-----------------------	----------------

Probability of failure

MTTF	1,099 Years
------	-------------

Control side

Nominal control current	3...13 mA	Pull-in/drop-out voltage, typ.	10 V / 8.5 V DC
Rated control voltage	10...32 V DC	Status indicator	No

Load side

Continuous current	5 A	Leakage current	< 20 µA
Min. switching current	1 mA	Protective circuit, load side	Free-wheeling diode
Rated switching voltage	35 V DC	Voltage drop at max. load	≤ 0.3 V

Contact data

Contact type	1 NO contact (MOS-FET)
--------------	------------------------

General data

Colour	black
--------	-------

Insulation coordination

Dielectric strength for control side - load side	2.5 kV _{eff}	Impulse withstand voltage	2.5 kV
--	-----------------------	---------------------------	--------

Connection data

Wire connection method	Plug-in connection	Pitch in mm (P)	5 mm
------------------------	--------------------	-----------------	------

Classifications

ETIM 6.0	EC001504	ETIM 7.0	EC001504
ECLASS 9.0	27-37-16-04	ECLASS 9.1	27-37-16-04
ECLASS 10.0	27-37-16-04	ECLASS 11.0	27-37-16-04

Approvals

Approvals



ROHS

Conform

Creation date March 23, 2021 10:04:08 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

SSR 10-32VDC/0-35VDC 5A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

Engineering Data

[STEP](#)

Engineering Data

[EPLAN, WSCAD](#)


SSR 10-32VDC/0-35VDC 5A

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Wiring diagram

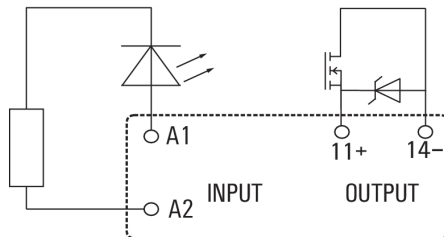

View of pins from below

Dimensional drawing

