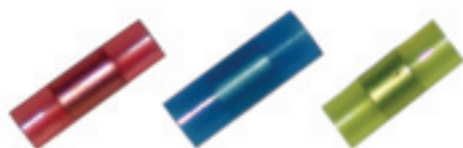


VPLI/1,5-2,5**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Insulated cable connector in PVC or PC/PA**

- Conventional designs
- Not soldered
- With conical entry funnel, except for joint connector

General ordering data

Version	cable lug, terminal end, Insulated cable connector, 1.5 mm ² - 2.5 mm ²
Order No.	1491470000
Type	VPLI/1,5-2,5
GTIN (EAN)	4050118301571
Qty.	100 pc(s).

VPLI/1,5-2,5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight	0.84 g
------------	--------

Connectors

Conductor cross-section, max.	2.5 mm ²	Conductor cross-section, min.	1.5 mm ²
Identification colour	blue	Inside diameter of collar (d4)	4 mm
Inside diameter of shaft (d1)	2.3 mm	Insulation	Fully insulated
Length 1 (l1)	17 mm	Length 2 (l2)	7 mm ²
Material/plastic	PA		

Classifications

ETIM 6.0	EC001059	ETIM 7.0	EC001059
ECLASS 9.0	27-40-02-12	ECLASS 9.1	27-40-02-12
ECLASS 10.0	27-40-02-12	ECLASS 11.0	27-40-02-12

Approvals

ROHS	Conform
------	---------

VPLI/1,5-2,5

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

