# KQNG-M4/S/-2,5

**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

**The use of insulated connectors guarantees users consistent electrical connection quality in the long term.**

- Wide range of insulated and non-insulated cable lugs and connectors
- Tubular cable lugs according to current market standards (Euroseries)
- Compression cable lugs acc. to DIN 46235
- Sheet metal cable lugs acc. to DIN 46234
- Insulated ring cable lugs to DIN 46237
- Insulated pin cable lugs to DIN 46231

## General ordering data

| | |
|---|---|
| Version | cable lug, terminal end,1.5 mm² - 2.5 mm² |
| Order No. | 1493620000 |
| Type | KQNG-M4/S/-2,5 |
| GTIN (EAN) | 4050118303247 |
| Qty. | 100 pc(s). |

# KQNG-M4/S/-2,5

**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

| | | | |
|---|---|---|---|
| Net weight | 0.634 g | Weight | 0.06 g |

### Connectors

| | | | |
|---|---|---|---|
| Conductor cross-section, max. | 2.5 mm² | Conductor cross-section, min. | 1.5 mm² |
| Connection length (l) | 11 mm | Hole | C 4/S |
| Inside diameter of flange (d2) | 4.3 mm | Inside diameter of shaft (d1) | 2.3 mm |
| Insulation | not available | Outside diameter of shaft (d3) | 6.8 mm |
| Shaft length (a) | 5 mm | | |

### Classifications

| | | | |
|---|---|---|---|
| ETIM 6.0 | EC001059 | ETIM 7.0 | EC001059 |
| ECLASS 9.0 | 27-40-02-92 | ECLASS 9.1 | 27-40-02-12 |
| ECLASS 10.0 | 27-40-02-92 | ECLASS 11.0 | 27-40-02-92 |

### Approvals

| | |
|---|---|
| ROHS | Conform |

### Downloads

| | |
|---|---|
| Engineering Data | EPLAN |

## KQNG-M4/S/-2,5

**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com
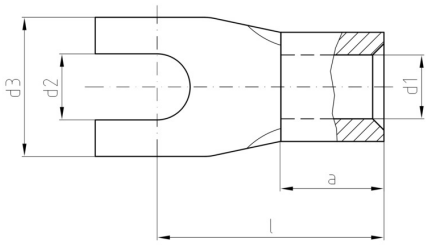
## Drawings