

**DRMKIT 24VAC 4CO LD/PB****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

Similar to illustration

- Mounted kit consisting relay, socket and retaining clip
- 100 % function tested
- 100 % check of the dielectric strenght between input - output
- 4 CO contacts
- With mechanical status indicator
- Optional Test button with coloured identification of coils (AC red / DC blue)
- Bright status LED (AC coil: red / DC coil: green)

**General ordering data**

|                |                                                                                                                                                                 |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version        | D-SERIES DRM, Relay module, Number of contacts: 4, CO contact AgNi flash gold-plated, Rated control voltage: 24 V AC, Continuous current: 5 A, Screw connection |
| Order No.      | <a href="#">1542530000</a>                                                                                                                                      |
| Type           | DRMKIT 24VAC 4CO LD/PB                                                                                                                                          |
| GTIN (EAN)     | 4050118347265                                                                                                                                                   |
| Qty.           | 10 pc(s).                                                                                                                                                       |
| Relevant base  | <a href="#">7760056264</a>                                                                                                                                      |
| Relevant relay | <a href="#">7760056101</a>                                                                                                                                      |

Creation date March 24, 2021 5:32:44 AM CET

**DRMKIT 24VAC 4CO LD/PB****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|                |            |                 |            |
|----------------|------------|-----------------|------------|
| Depth          | 66.8 mm    | Depth (inches)  | 2.63 inch  |
| Height         | 79.9 mm    | Height (inches) | 3.146 inch |
| Net weight     | 93.35 g    | Width           | 27.2 mm    |
| Width (inches) | 1.071 inch |                 |            |

**Temperatures**

|                     |                |                       |                |
|---------------------|----------------|-----------------------|----------------|
| Storage temperature | -40 °C...70 °C | Operating temperature | -40 °C...55 °C |
|---------------------|----------------|-----------------------|----------------|

**Environmental Product Compliance**

|            |                |
|------------|----------------|
| REACH SVHC | Lead 7439-92-1 |
|------------|----------------|

**Control side**

|                                |                                  |                       |                    |
|--------------------------------|----------------------------------|-----------------------|--------------------|
| Coil resistance                | 160 $\Omega \pm 10\%$            | Power rating          | 1.0...1.2VA (60HZ) |
| Pull-in/drop-out voltage, typ. | 19.2 V / 7.2 V AC                | Rated control voltage | 24 V AC            |
| Rated current AC               | 62.4 mA (50 Hz), 52.2 mA (60 Hz) | Status indicator      | red LED            |

**Load side**

|                                         |              |                      |                            |
|-----------------------------------------|--------------|----------------------|----------------------------|
| AC switching capacity (resistive), max. | 1250 VA      | Continuous current   | 5 A                        |
| DC switching capacity (resistive), max. | 120 W @ 24 V | Inrush current       | 10 A / 50 ms               |
| Max. switching frequency at rated load  | 0.1 Hz       | Min. switching power | 10 mA @ 12 V, 100 mA @ 5 V |
| Rated switching voltage                 | 250 V AC     | Switch-off delay     | $\leq 20$ ms               |
| Switch-on delay                         | $\leq 20$ ms |                      |                            |

**Contact data**

|                         |                                       |                    |                      |
|-------------------------|---------------------------------------|--------------------|----------------------|
| Contact type            | 4 CO contact (AgNi flash gold-plated) | Contact resistance | $\leq 50$ m $\Omega$ |
| Mechanical service life | 20 x 10 <sup>6</sup> switching cycles |                    |                      |

**General data**

|                                      |                          |                        |
|--------------------------------------|--------------------------|------------------------|
| Rail                                 | TS 35                    |                        |
| Test button                          | yes (lockable)           |                        |
| Mechanical switch position indicator | Yes                      |                        |
| Colour                               | black                    |                        |
| UL94 flammability rating component   | Component                | Housing                |
|                                      | UL94 flammability rating | V-2                    |
|                                      | Component                | Mounting foot          |
|                                      | UL94 flammability rating | HB                     |
|                                      | Component                | Retaining clip         |
|                                      | UL94 flammability rating | HB                     |
|                                      | Component                | Relay cover            |
|                                      | UL94 flammability rating | V-2                    |
|                                      | Component                | Relay baseplate        |
|                                      | UL94 flammability rating | V-0                    |
|                                      | Component                | Relay status indicator |
|                                      | UL94 flammability rating | HB                     |
|                                      | Component                | Relay test button      |
|                                      | UL94 flammability rating | HB                     |

Creation date March 24, 2021 5:32:44 AM CET

**DRMKIT 24VAC 4CO LD/PB**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)
**Technical data**
**Insulation coordination**

|                                                |                             |                                              |                                |
|------------------------------------------------|-----------------------------|----------------------------------------------|--------------------------------|
| Creepage and clearance distance input – output | ≥ 5.5 mm                    | Dielectric strength of neighbouring contacts | 1 kV <sub>eff</sub> / 1 min    |
| Dielectric strength of open contact            | 1 kV <sub>eff</sub> / 1 min | Dielectric strength, Input/Output            | 1.8 kV <sub>eff</sub> / 1 min. |
| Impulse withstand voltage                      | 4.8 kV (1.2/50 µs)          | Insulating material group                    | C                              |
| Pollution severity                             | 2                           | Protection degree                            | IP20                           |
| Rated voltage                                  | 250 V                       | Surge voltage category                       | III                            |

**Further details of approvals / standards**

|                               |         |                              |         |
|-------------------------------|---------|------------------------------|---------|
| Certificate no. (cURus) relay | E312083 | Certificate no. (cURus) base | E312083 |
|-------------------------------|---------|------------------------------|---------|

**Connection data**

|                                                                                         |                     |                                                                                         |                     |
|-----------------------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------|---------------------|
| Wire connection method                                                                  | Screw connection    | Stripping length, rated connection                                                      | 7 mm                |
| Tightening torque, min.                                                                 | 0.5 Nm              | Tightening torque, max.                                                                 | 0.7 Nm              |
| Clamping range, min.                                                                    | 0.5 mm <sup>2</sup> | Clamping range, max.                                                                    | 2.5 mm <sup>2</sup> |
| Wire cross-section, solid, min.                                                         | 0.5 mm <sup>2</sup> | Wire cross-section, solid, max.                                                         | 2.5 mm <sup>2</sup> |
| Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup> | Wire connection cross section, finely stranded, max.                                    | 2.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup> | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 2.5 mm <sup>2</sup> |
| Conductor cross-section, flexible, AEH (DIN 46228-1), min.                              | 0.5 mm <sup>2</sup> | Conductor cross-section, flexible, AEH (DIN 46228-1), max.                              | 2.5 mm <sup>2</sup> |
| Wire connection cross section, finely stranded, two clampable wires, min.               | 0.5 mm <sup>2</sup> | Wire cross-section, finely stranded, two clampable wires, max.                          | 1 mm <sup>2</sup>   |
| Blade size                                                                              | size PH1            |                                                                                         |                     |

**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001437    | ETIM 7.0    | EC001437    |
| ECLASS 9.0  | 27-37-16-01 | ECLASS 9.1  | 27-37-16-01 |
| ECLASS 10.0 | 27-37-16-01 | ECLASS 11.0 | 27-37-16-01 |

**Approvals**

Approvals



ROHS

Conform

**Downloads**

|                                             |                                                                         |
|---------------------------------------------|-------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">EU Konformitätserklärung / EU Declaration of Conformity</a> |
| Engineering Data                            | <a href="#">STEP</a>                                                    |
| Engineering Data                            | <a href="#">EPLAN, WSCAD, Zuken E3.S</a>                                |


## DRMKIT 24VAC 4CO LD/PB

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany


[www.weidmueller.com](http://www.weidmueller.com)

## Drawings


### Wiring diagram

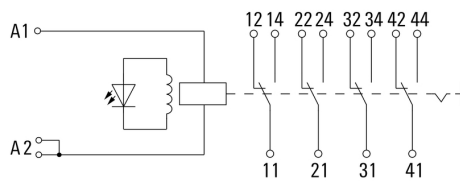


### Graph

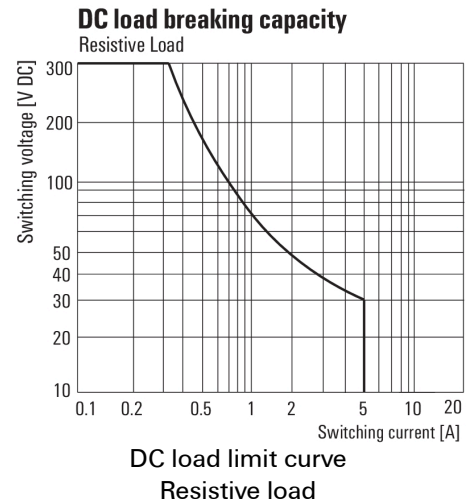


### Graph

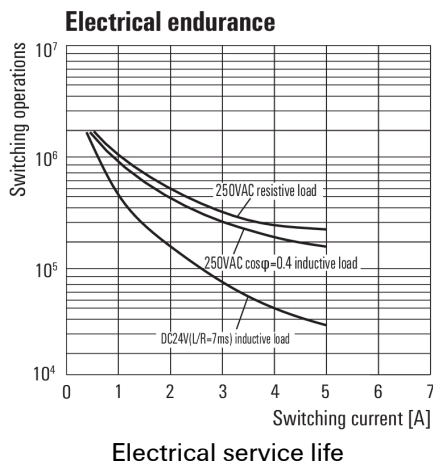


### Graph

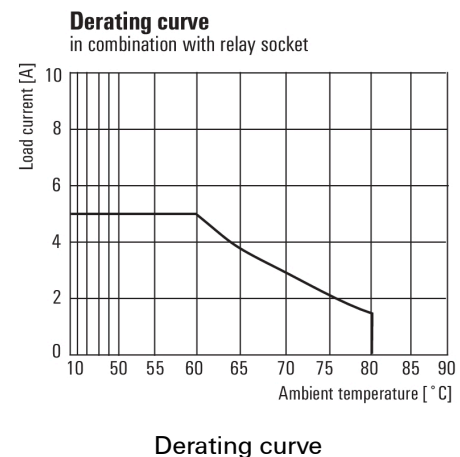

### Graph

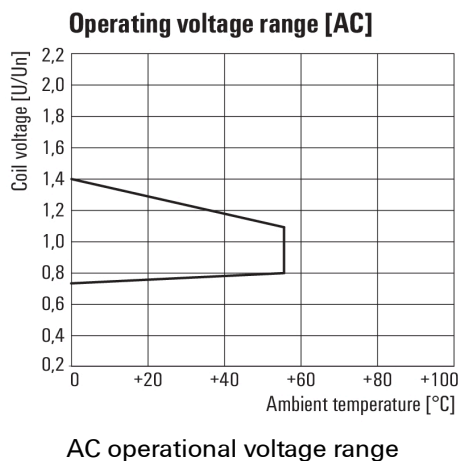

### Dimensional drawing

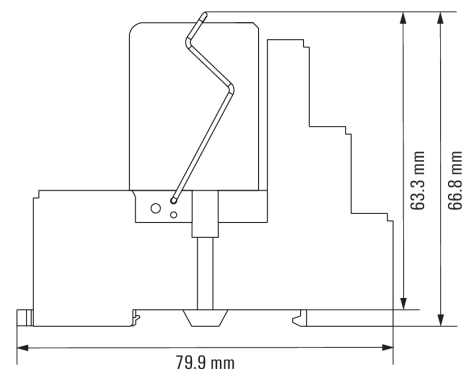

# DRMKIT 24VAC 4CO LD/PB

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

## Miscellaneous

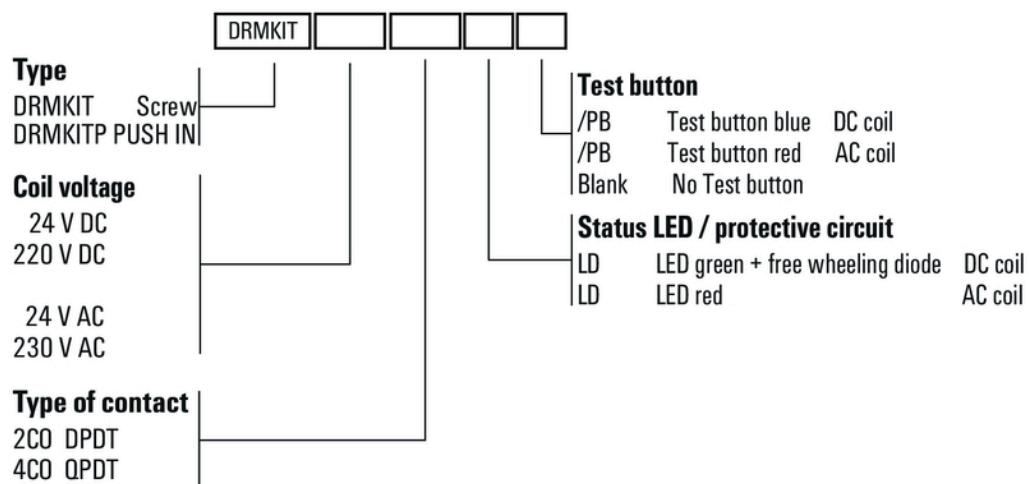

Type codes