

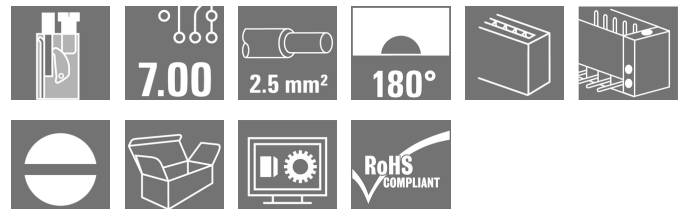
**STV S 4 TS****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

Similar to illustration

Tried-and-tested power connector system for straight conductor-conductor connections, with TOP system for space-saving conductor connection. Counterpart also available with optional solder pins for PCB connection. Versatile thanks to mounting bracket for fixing to enclosure and screw locking, plus extensive accessories.

**General ordering data**

|              |                                                                                                                          |
|--------------|--------------------------------------------------------------------------------------------------------------------------|
| Version      | PCB plug-in connector, male plug, 7.00 mm, Number of poles: 4, 180°, TOP connection, Clamping range, max. : 2.5 mm², Box |
| Order No.    | <a href="#">1612280000</a>                                                                                               |
| Type         | STV S 4 TS                                                                                                               |
| GTIN (EAN)   | 4008190199005                                                                                                            |
| Qty.         | 10 pc(s).                                                                                                                |
| Product data | IEC: / 24 A / 0.5 - 2.5 mm²<br>UL: 600 V / 17 A / AWG 22 - AWG 14                                                        |
| Packaging    | Box                                                                                                                      |

Creation date March 24, 2021 11:04:55 AM CET

## STV S 4 TS

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 40.8 mm | Depth (inches)  | 1.606 inch |
| Height     | 22.6 mm | Height (inches) | 0.89 inch  |
| Net weight | 35.8 g  |                 |            |

## System Parameters

|                                            |                             |                                              |                                 |
|--------------------------------------------|-----------------------------|----------------------------------------------|---------------------------------|
| Product family                             | OMNIMATE Power - series STV | Type of connection                           | Field connection                |
| Wire connection method                     | TOP connection              | Pitch in mm (P)                              | 7 mm                            |
| Pitch in inches (P)                        | 0.276 inch                  | Conductor outlet direction                   | 180°                            |
| Number of poles                            | 4                           | L1 in mm                                     | 21 mm                           |
| L1 in inches                               | 0.827 inch                  | Number of rows                               | 1                               |
| Pin series quantity                        | 1                           | Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch, plugged |
| Touch-safe protection acc. to DIN VDE 0470 | IP20 plugged                | Stripping length                             | 15 mm                           |
| Tightening torque, min.                    | 0.5 Nm                      | Tightening torque, max.                      | 0.6 Nm                          |
| Screwdriver blade                          | 0.6 x 3.5                   | Screwdriver blade standard                   | DIN 5264                        |

## Material data

|                                       |               |                                       |                     |
|---------------------------------------|---------------|---------------------------------------|---------------------|
| Insulating material                   | Wemid (PA)    | Colour                                | Pebble grey         |
| Colour chart (similar)                | RAL 7032      | Insulating material group             | I                   |
| Comparative Tracking Index (CTI)      | ≥ 600         | Insulation strength                   | ≥ 10 <sup>8</sup> Ω |
| UL 94 flammability rating             | V-0           | Contact material                      | CuZn                |
| Contact surface                       | silver-plated | Storage temperature, min.             | -40 °C              |
| Storage temperature, max.             | 70 °C         | Operating temperature, min.           | -50 °C              |
| Operating temperature, max.           | 100 °C        | Temperature range, installation, min. | -25 °C              |
| Temperature range, installation, max. | 100 °C        |                                       |                     |

## Conductors suitable for connection

|                                                 |                      |                                         |                                                                                                                                                                        |
|-------------------------------------------------|----------------------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Clamping range, min.                            | 0.32 mm <sup>2</sup> | Clamping range, max.                    | 2.5 mm <sup>2</sup>                                                                                                                                                    |
| Wire connection cross section AWG, min.         | AWG 22               | Wire connection cross section AWG, max. | AWG 12                                                                                                                                                                 |
| Solid, min. H05(07) V-U                         | 0.5 mm <sup>2</sup>  | Solid, max. H05(07) V-U                 | 2.5 mm <sup>2</sup>                                                                                                                                                    |
| Flexible, min. H05(07) V-K                      | 0.5 mm <sup>2</sup>  | Flexible, max. H05(07) V-K              | 2.5 mm <sup>2</sup>                                                                                                                                                    |
| Plug gauge in accordance with EN 60999 a x b; ø |                      | Reference text                          | The outside diameter of the plastic collar should not be larger than the pitch (P). Length of ferrules is to be chosen depending on the product and the rated voltage. |
|                                                 | 2.8 mm x 2.0 mm      |                                         |                                                                                                                                                                        |

## Rated data acc. to IEC

|                                               |                        |                                               |                   |
|-----------------------------------------------|------------------------|-----------------------------------------------|-------------------|
| tested acc. to standard                       | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C) | 24 A              |
| Rated current, max. number of poles (Tu=20°C) | 22 A                   | Rated current, min. number of poles (Tu=40°C) | 20 A              |
| Rated current, max. number of poles (Tu=40°C) | 19 A                   | Short-time withstand current resistance       | 1 x 1s with 300 A |

## STV S 4 TS

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Rated data acc. to CSA

Institute (CSA)



Certificate No. (CSA)

12400-343

|                                   |                                                                        |
|-----------------------------------|------------------------------------------------------------------------|
| Rated voltage (Use group B / CSA) | 300 V                                                                  |
| Rated current (Use group B / CSA) | 17 A                                                                   |
| Wire cross-section, AWG, min.     | AWG 20                                                                 |
| Reference to approval values      | Specifications are maximum values, details - see approval certificate. |

|                                   |        |
|-----------------------------------|--------|
| Rated voltage (Use group D / CSA) | 300 V  |
| Rated current (Use group D / CSA) | 17 A   |
| Wire cross-section, AWG, max.     | AWG 14 |

## Rated data acc. to UL 1059

Institute (UR)



Certificate No. (UR)

E92202

|                              |                                                                        |
|------------------------------|------------------------------------------------------------------------|
| Reference to approval values | Specifications are maximum values, details - see approval certificate. |
|------------------------------|------------------------------------------------------------------------|

## Rated data acc. to UL 1977

Institute (UR)



Certificate No. (UR)

E92202

|                               |                                                                        |
|-------------------------------|------------------------------------------------------------------------|
| Reference to approval values  | Specifications are maximum values, details - see approval certificate. |
| Rated current (UL 1977)       | 17 A                                                                   |
| AWG-conductor, max. (UL 1977) | 14                                                                     |

|                               |       |
|-------------------------------|-------|
| Rated voltage (UL 1977)       | 600 V |
| AWG-conductor, min. (UL 1977) | 22    |

## Packing

|           |        |            |        |
|-----------|--------|------------|--------|
| Packaging | Box    | VPE length | 45 mm  |
| VPE width | 117 mm | VPE height | 128 mm |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002638    | ETIM 7.0    | EC002638    |
| ECLASS 9.0  | 27-44-03-09 | ECLASS 9.1  | 27-44-03-09 |
| ECLASS 10.0 | 27-44-03-09 | ECLASS 11.0 | 27-46-02-02 |

## STV S 4 TS

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Important note

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.                                                                                                                                                                                                                                                                                                                     |
| Notes          | <ul style="list-style-type: none"> <li>• Additional colours on request</li> <li>• Rated current related to rated cross-section &amp; min. No. of poles.</li> <li>• Wire end ferrule without plastic collar to DIN 46228/1</li> <li>• Wire end ferrule with plastic collar to DIN 46228/4</li> <li>• P on drawing = pitch</li> <li>• Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.</li> <li>• Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months</li> </ul> |

## Approvals

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E92202  |

## Downloads

|                                             |                                                 |
|---------------------------------------------|-------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">Declaration of the Manufacturer</a> |
| Engineering Data                            | <a href="#">EPLAN, WSCAD</a>                    |

## STV S 4 TS

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

### Dimensional drawing

