

STV 2/10 RH SET SW

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany

www.weidmueller.com





No task is too small when creating the perfect solution. br/>

Connections form just one part of the overall process. Small details are often the key to the perfect solution in applications where potentials are tested, grouped or even isolated.

A system is not a system without small but useful details:

- Test plugs ensure reliable pick-up from diagnostic sockets
- Cross-connectors ensure a stable electrical distribution contact directly at the connection
- Compartment partition elements divide a large number of male connectors into several separate socket connector channels
- Locks and clips optional vibration-resistant clipon connection or mounting for male and female connectors

In tandem with the manufacturing process and application - more accessories = smaller workload

General ordering data

Version	PCB plug-in connector, Accessories, black,
	Number of poles: 10
Order No.	<u>1613820000</u>
Туре	STV 2/10 RH SET SW
GTIN (EAN)	4008190262532
Qty.	10 pc(s).
Product data	
Packaging	Вох



STV 2/10 RH SET SW

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany

www.weidmueller.com

Technical data

Dim	ensions	and	weights
	GIISIUIIS	anu	WEIGHTS

Net weight	7 g	

Material data

Insulating material	PA	Colour	black
Colour chart (similar)	RAL 9011	Storage temperature, min.	-40 °C
Storage temperature, max.	70 °C	Operating temperature, min.	-50 °C
Operating temperature, max.	100 °C	Temperature range, installation, min.	-25 °C
Temperature range, installation, max.	100 °C		

Rated data acc. to IEC

tested acc. to standard	IEC 60664-1, IEC 61984

Packing

Packaging	Box	VPE length	5 mm
VPE width	80 mm	VPE height	130 mm

Classifications

ETIM 6.0	EC002943	ETIM 7.0	EC002943
ECLASS 9.0	27-44-04-02	ECLASS 9.1	27-44-04-92
ECLASS 10.0	27-44-04-02	ECLASS 11.0	27-46-02-01

Important note

IPC conformity	Conformity: The products are developed, manufactured and delivered according international recognized
	standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties
	in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.
Notes	• Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months

Approvals

pprovals		
	1311	


ROHS	Conform


Downloads


Approval/Certificate/Document of	
Conformity	Declaration of the Manufacturer


SHOWN: ARPL BV/SV7.62HP/2AN


SHOWN: ARPL BV/SV7.62HP/4AN

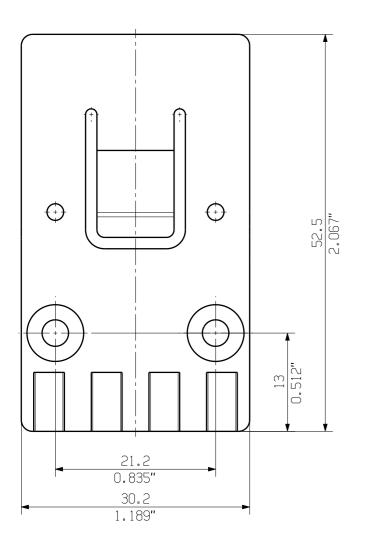

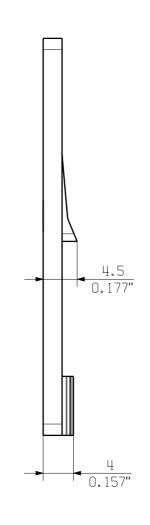


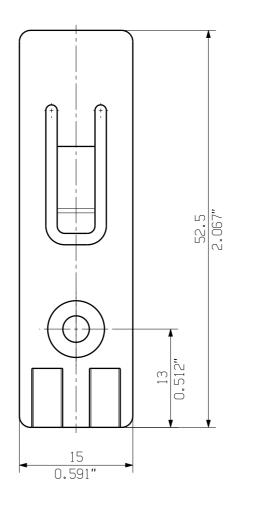

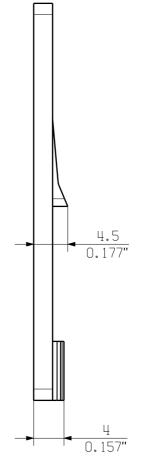

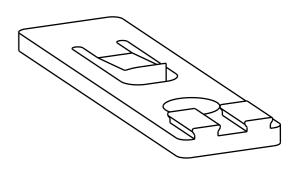

ARPL BV/SV7.62HP/2AN

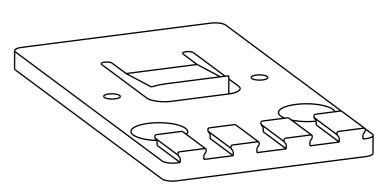

ARPL BV/SV7.62HP/4AN

PA 66/6 VO 30 GF GR	BV/SV7.62HP/4AN ARPL GR	1937580000
PA 66/6 VO 30 GF GR	BV/SV7.62HP/2AN ARPL GR	1937570000
WERKSTOFF MATERIAL	TYP PART NAME	BESTNR.
INIVITEITIVE	I I AILI NANL	UNI.NU.

