

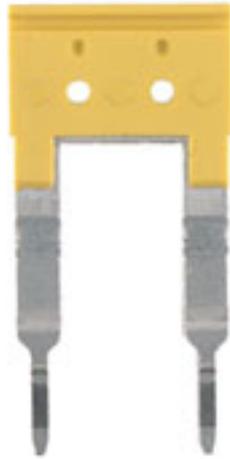
ZQS 2.5/2**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image**Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

| | |
|------------|------------------------------------|
| Version | Accessories, Cross-connector, 24 A |
| Order No. | 1633200000 |
| Type | ZQS 2.5/2 |
| GTIN (EAN) | 4008190263386 |
| Qty. | 20 pc(s). |

Creation date March 24, 2021 3:18:22 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

ZQS 2.5/2**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

| | | | |
|----------------|-----------|-----------------|------------|
| Depth | 31.6 mm | Depth (inches) | 1.244 inch |
| Height | 16.6 mm | Height (inches) | 0.654 inch |
| Net weight | 2.75 g | Width | 2.8 mm |
| Width (inches) | 0.11 inch | | |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|-----|
| Storage temperature | -25 °C...55 °C | Continuous operating temp., min. | -50 |
| Continuous operating temp., max. | 120 | | |

Material data

| | | | |
|---------------------------|-------|--------|--------|
| Material | Wemid | Colour | yellow |
| UL 94 flammability rating | V-0 | | |

System specifications

| | |
|---------|-------------------|
| Version | For the terminals |
|---------|-------------------|

Additional technical data

| | | | |
|--------------------------|---------|---------------------|-----------------|
| Explosion-tested version | No | Installation advice | Direct mounting |
| Type of fixing | Plugged | | |

Cross-connector

| | | | |
|-------------------------------------|-----------------|---------------------------|------|
| Number of cross-connected terminals | 2 | Rated current, multi-pole | 10 A |
| Type | Cross-connector | | |

Dimensions

| | |
|-----------------|-------|
| Pitch in mm (P) | 12 mm |
|-----------------|-------|

General

| | | | |
|---------------------|-----------------|-----------------|---|
| Installation advice | Direct mounting | Number of poles | 2 |
|---------------------|-----------------|-----------------|---|

Rating data

| | |
|---------------|------|
| Rated current | 24 A |
|---------------|------|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000489 | ETIM 7.0 | EC000489 |
| ECLASS 9.0 | 27-14-11-40 | ECLASS 9.1 | 27-14-11-40 |
| ECLASS 10.0 | 27-14-11-40 | ECLASS 11.0 | 27-14-11-40 |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

ZQS 2.5/2

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data**Downloads**

| | |
|--------------------|---|
| Engineering Data | STEP |
| Engineering Data | EPLAN, WSCAD |
| User Documentation | StorageConditionsTerminalBlocks |
