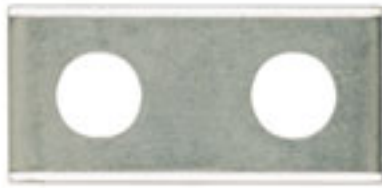


**WQL 2 WF5****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image****Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

**General ordering data**

|            |                                                                   |
|------------|-------------------------------------------------------------------|
| Version    | Bolt-type screw terminals, Cross-connector,<br>Number of poles: 2 |
| Order No.  | <a href="#">1812710000</a>                                        |
| Type       | WQL 2 WF5                                                         |
| GTIN (EAN) | 4032248404568                                                     |
| Qty.       | 5 pc(s).                                                          |

## WQL 2 WF5

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                |            |                 |            |
|----------------|------------|-----------------|------------|
| Depth          | 4 mm       | Depth (inches)  | 0.157 inch |
| Height         | 25 mm      | Height (inches) | 0.984 inch |
| Net weight     | 8.61 g     | Width           | 12 mm      |
| Width (inches) | 0.472 inch |                 |            |

## Temperatures

|                     |                |
|---------------------|----------------|
| Storage temperature | -25 °C...55 °C |
|---------------------|----------------|

## Material data

|          |               |        |      |
|----------|---------------|--------|------|
| Material | Copper - zinc | Colour | grey |
|----------|---------------|--------|------|

## Additional technical data

|                          |    |                |                 |
|--------------------------|----|----------------|-----------------|
| Explosion-tested version | No | Type of fixing | when screwed in |
|--------------------------|----|----------------|-----------------|

## Cross-connector

|                                     |       |                       |                 |
|-------------------------------------|-------|-----------------------|-----------------|
| Number of cross-connected terminals | 2     | Rated current, 2-pole | 76 A            |
| Rated current, multi-pole           | 101 A | Type                  | Cross-connector |

## Dimensions

|                 |       |
|-----------------|-------|
| Pitch in mm (P) | 22 mm |
|-----------------|-------|

## General

|                 |   |
|-----------------|---|
| Number of poles | 2 |
|-----------------|---|

## Rating data

|               |      |
|---------------|------|
| Rated current | 76 A |
|---------------|------|

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000489    | ETIM 7.0    | EC000489    |
| ECLASS 9.0  | 27-14-11-40 | ECLASS 9.1  | 27-14-11-40 |
| ECLASS 10.0 | 27-14-11-40 | ECLASS 11.0 | 27-14-11-40 |

## Approvals

Approvals



|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

### WQL 2 WF5

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

|                                             |                                                 |
|---------------------------------------------|-------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">EAC certificate</a>                 |
| Engineering Data                            | <a href="#">STEP</a>                            |
| Engineering Data                            | <a href="#">EPLAN, WSCAD</a>                    |
| User Documentation                          | <a href="#">StorageConditionsTerminalBlocks</a> |