


**SAIL-M8BG-3S3.0U****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

Our developers have focused specifically on this issue and designed a host of different M8 and M12 sensor-actuator cables so you are bound to find the solution you need for your application.

Our sensor cables come with 360° shielding which provides protection against electromagnetic interference. Is there something you have not managed to find or you feel needs explanation? Talk to us!

**General ordering data**

|            |                                                                                                                                                                   |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version    | Sensor/actuator line, One end without connector, M8, Number of poles : 3, 3 m, Female socket, straight, Shielded: Yes, LED: No, Sheath material: PUR, Halogen: No |
| Order No.  | <a href="#">1906600300</a>                                                                                                                                        |
| Type       | SAIL-M8BG-3S3.0U                                                                                                                                                  |
| GTIN (EAN) | 4032248530311                                                                                                                                                     |
| Qty.       | 1 pc(s).                                                                                                                                                          |

**SAIL-M8BG-3S3.0U****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |       |
|------------|-------|
| Net weight | 116 g |
|------------|-------|

**Environmental Product Compliance**

|            |                |
|------------|----------------|
| REACH SVHC | Lead 7439-92-1 |
|------------|----------------|

**Technical specifications for cable**

|                                                |                              |        |
|------------------------------------------------|------------------------------|--------|
| Acceleration                                   | 5 m/s²                       |        |
| Bending cycles                                 | 250.000                      |        |
| Bending radius, min., moving                   | 12 x conductor cross-section |        |
| Bending radius, min., stationary               | 5 x cable diameter           |        |
| Cable length                                   | 3 m                          |        |
| Colour coding                                  | brown, blue, black           |        |
| Configurable cable length                      | No                           |        |
| Core cross-section                             | 0.34 mm²                     |        |
| Core in accordance with UL AWM style           | 10493 (80 °C / 300 V)        |        |
| Halogen                                        | No                           |        |
| Housing main material                          | PUR                          |        |
| Insulation                                     | PP                           |        |
| Number of poles                                | 3                            |        |
| Number of poles                                | 3                            |        |
| Outer cladding in accordance with UL AWM style | 20549 (80 °C / 300 V)        |        |
| Outer diameter                                 | 4.8 ± 0.2 mm                 |        |
| Outside diameter                               | Diameter                     | 4.8 mm |
|                                                | Signs                        | ±      |
|                                                | Tolerance                    | 0.2 mm |
| Outside diameter                               | 4.8 mm ± 0.2 mm              |        |
| Resistant to welding beads                     | No                           |        |
| Sheath material                                | PUR                          |        |
| Sheathing colour                               | black                        |        |
| Shielded                                       | Yes                          |        |
| Speed                                          | 100 m/min                    |        |
| Suitable for cable carriers                    | Yes                          |        |
| Temperature range, moving                      | -25...80 °C                  |        |
| Temperature range, moving, max.                | 80 °C                        |        |
| Temperature range, moving, min.                | -25 °C                       |        |
| Temperature range, stationary                  | -40...80 °C                  |        |
| Temperature range, stationary, max.            | 80 °C                        |        |
| Temperature range, stationary, min.            | -40 °C                       |        |
| Torsion resistance                             | 0 °/m                        |        |

**General technical data**

|                        |                                         |                              |                  |
|------------------------|-----------------------------------------|------------------------------|------------------|
| Coding                 | none                                    | Connection thread            | M8               |
| Contact surface        | Gold-plated                             | Housing main material        | PUR              |
| Insulation strength    | 10 <sup>8</sup> Ω                       | LED                          | No               |
| Plugging cycles        | ≥ 100                                   | Pollution severity           | 3                |
| Protection degree      | IP65, IP66, IP67, IP68, when screwed in | Rated current                | 4 A              |
| Rated voltage          | 60 V                                    | Temperature range of housing | -25...+80 °C     |
| Threaded ring material | Diecast zinc                            | Tightening torque            | M8: 0.5 - 0.6 Nm |
| Version                | Female socket, straight                 | jumpered                     | No               |

Creation date March 26, 2021 7:15:56 AM CET

**SAIL-M8BG-3S3.0U****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001855    | ETIM 7.0    | EC001855    |
| ECLASS 9.0  | 27-06-03-11 | ECLASS 9.1  | 27-06-03-11 |
| ECLASS 10.0 | 27-06-03-11 | ECLASS 11.0 | 27-06-03-11 |

**Approvals**

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E307231 |

**Downloads**

|                  |                              |
|------------------|------------------------------|
| Engineering Data | <a href="#">EPLAN, WSCAD</a> |
|------------------|------------------------------|


## SAIL-M8BG-3S3.0U

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)


## Drawings

### Dimensioned drawing

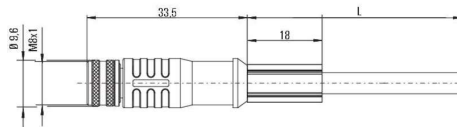


Straight socket

### Pole scheme

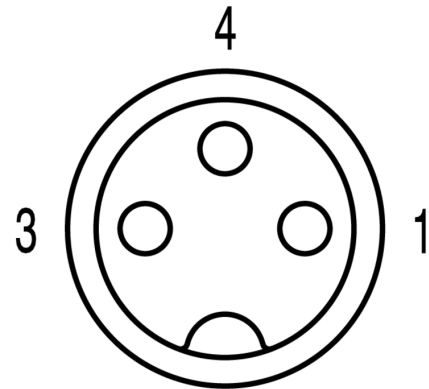

Socket

### Wiring diagram



### The ideal tool: Screwty<sup>®</sup> with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F