


SAIL-M23GM23G-MM19-5.0U**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

The M23 cables offer: high mating frequency, high current carrying capacity and high-density contacts coupled with minimal dimensions.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

General ordering data

Version	Sensor/actuator line, Connecting line, M23 / M23, Number of poles: 19, 5 m, pin, straight - socket, straight, Shielded: No, LED: No, Sheath material: PUR, Halogen: No
Order No.	1935510500
Type	SAIL-M23GM23G-MM19-5.0U
GTIN (EAN)	4032248773138
Qty.	1 pc(s).

Creation date March 26, 2021 10:15:02 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

SAIL-M23GM23G-MM19-5.0U**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight	774 g
------------	-------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Technical specifications for cable

Bending cycles	2 Mio	
Bending radius, min., moving	10 x cable diameter	
Cable length	5 m	
Colour coding	violet, red, grey, red / blue, green, blue, grey / pink, white / green, white / yellow, white / grey, black, Green/yellow, Yellow / brown, brown / green, white, yellow, pink, grey / brown, brown	
Core in accordance with UL AWM style	10493 (80 °C / 300 V)	
Halogen	No	
Housing main material	PUR	
Insulation	TPM	
Number of poles	19	
Number of poles	19	
Outer cladding in accordance with UL AWM style	21198 (80 °C / 300 V)	
Outer diameter	9.1 ± 0.3 mm	
Outside diameter	9.1 mm ± 0.3 mm	
Outside diameter	Diameter	9.1 mm
	Signs	±
	Tolerance	0.3 mm
Resistant to welding beads	No	
Sheath material	PUR	
Sheathing colour	black	
Shielded	No	
Suitable for cable carriers	Yes	
Temperature range, moving	-25...80 °C	
Temperature range, moving, max.	80 °C	
Temperature range, moving, min.	-25 °C	
Temperature range, stationary	-50...80 °C	
Temperature range, stationary, max.	80 °C	
Temperature range, stationary, min.	-50 °C	
Torsion resistance	0 °/m	
Wire cross section	12-pole (8x0.34+3x0.75)/19-pole (16x0.34+3x0.75)	

General technical data

Connection side version	Connection side	1
	Connection thread	M23
	Type of contact	Pin
	Type of thread	Inner thread
	Outlet direction	straight
	Connection side	2
	Connection thread	M23
	Type of contact	Socket
	Type of thread	External thread
	Outlet direction	straight
Connection side version 1	M23, Pin, Inner thread, straight	
Connection side version 2	M23, Socket, External thread, straight	
Connection thread	M23 / M23	

Creation date March 26, 2021 10:15:02 AM CET

SAIL-M23GM23G-MM19-5.0U**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data**

Contact surface	Gold-plated
Housing main material	PUR
Insulation strength	$10^{12} \Omega$
LED	No
Plugging cycles	≥ 50
Pollution severity	2
Protection degree	IP67
Rated current	8 A
Rated voltage	120 V
Temperature range of housing	-25...+80 °C
Threaded ring material	Diecast zinc
Tightening torque	M23: 2.5 Nm
Version	pin, straight - socket, straight
jumpered	No

Classifications

ETIM 6.0	EC001855	ETIM 7.0	EC001855
ECLASS 9.0	27-06-03-11	ECLASS 9.1	27-06-03-11
ECLASS 10.0	27-06-03-11	ECLASS 11.0	27-06-03-11

Approvals

Approvals



ROHS

Conform

DownloadsEngineering Data [EPLAN, WSCAD](#)


SAIL-M23GM23G-MM19-5.0U

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings

Dimensioned drawing




Pole scheme

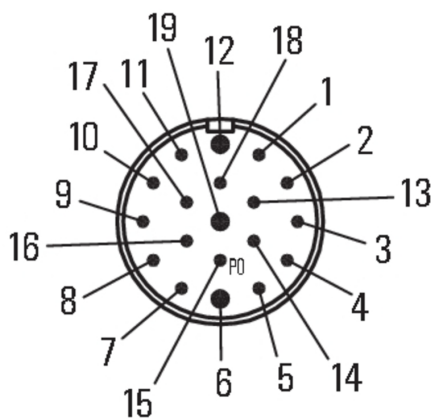


Male

Wiring diagram

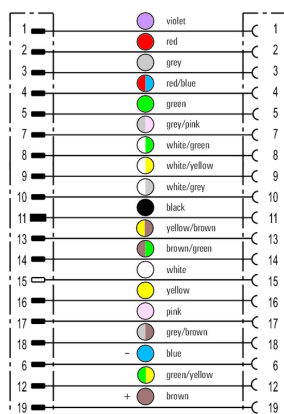


Dimensioned drawing



Straight socket

Pole scheme

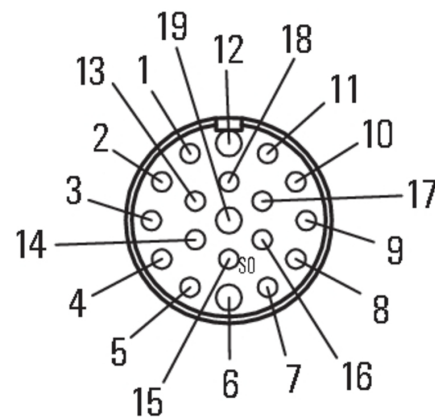

Socket

The ideal tool: Screwty® with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F