

SAIL-VSCD-15Q**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Weidmüller can supply valve plugs as connecting lines with M12 plugs and one end without connector. The status of the valve plug is shown by an LED. Every valve plug is fitted with a protective circuit. The Weidmüller range includes valve plugs of type A, B and C to DIN and industry standards. In the plugged condition they achieve IP 67 class of protection. The outlet direction is also a decisive factor: Weidmüller can also supply 0° versions, i.e. the cable outlet direction is located at the PE contact.

General ordering data

Version	, One end without connector - valve plug, CD
Order No.	1935981500
Type	SAIL-VSCD-15Q
GTIN (EAN)	4032248606207
Qty.	1 pc(s).

SAIL-VSCD-15Q**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight	463 g
------------	-------

Technical specifications for cable

Cable length	15 m	Core cross-section	0.75 mm ²
Number of poles	3		

General technical data

All valve plugs are fitted with protective circuits	Varistor	Coding	DIN design C (8 mm)
LED	Yes	Protection degree	IP67, when screwed in
Rated current	4 A	Rated voltage	24 V
Temperature range of housing	-25...+80 °C	Version	One end without connector - valve plug

Classifications

ETIM 6.0	EC001855	ETIM 7.0	EC001855
ECLASS 9.0	27-06-03-12	ECLASS 9.1	27-06-03-11
ECLASS 10.0	27-06-03-12	ECLASS 11.0	27-06-03-12

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	WSCAD
Brochure/Catalogue	Catalogues in PDF-format


SAIL-VSCD-15Q

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings

Dimensioned drawing

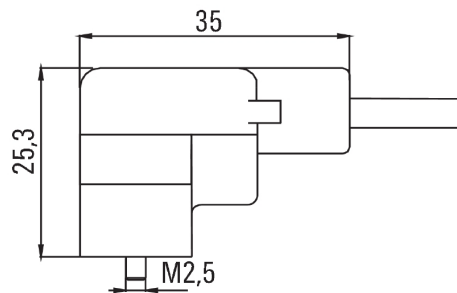

Pole scheme

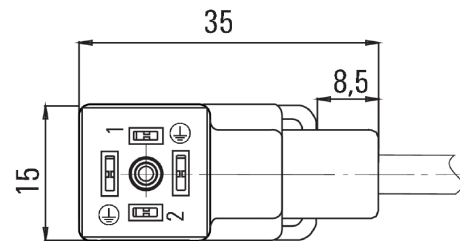

Wiring diagram

