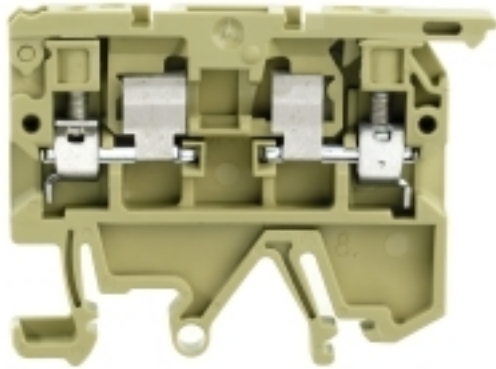


ASK 1/EN LD 24V AC/DC DB**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Similar to illustration

Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Version	SAK Series, Fuse terminal, Rated cross-section: 4 mm ² , Screw connection, Direct mounting
Order No.	1937670000
Type	ASK 1/EN LD 24V AC/DC DB
GTIN (EAN)	4032248614752
Qty.	25 pc(s).

ASK 1/EN LD 24V AC/DC DB

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	51.5 mm	Depth (inches)	2.028 inch
Height	58 mm	Height (inches)	2.283 inch
Net weight	13.84 g	Width	8.1 mm
Width (inches)	0.319 inch		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100 °C		

Material data

Material	PA 66	Colour	dark beige
UL 94 flammability rating	V-2		

System specifications

Version	Screw connection, Fuse cartridge, with LED, One end without connector	Number of potentials	1
Number of levels	1	Number of clamping points per level	2
Number of potentials per tier	1	Levels cross-connected internally	No
PE connection	No	Rail	TS 35, TS 32
N-function	No	PE function	No
PEN function	No		

Additional technical data

Installation advice	Direct mounting	Type of mounting	Snap-on
---------------------	-----------------	------------------	---------

Conductors for clamping (rated connection)

Number of connections	2	Type of connection	Screw connection
-----------------------	---	--------------------	------------------

Dimensions

TS 32 offset	10.5 mm	TS 35 offset	8.5 mm
--------------	---------	--------------	--------

Fuse terminals

Cartridge fuse	G-Si. 5 x 20
----------------	--------------

General

Installation advice	Direct mounting	Rail	TS 35, TS 32
---------------------	-----------------	------	--------------

Rating data

Power loss in accordance with IEC 60947-7-x	1.02 W	Rated cross-section	4 mm ²
Rated voltage	24 V	Rated current	6.3 A
Volume resistance according to IEC 60947-7-x	1 mΩ		

ASK 1/EN LD 24V AC/DC DB**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Classifications**

ETIM 6.0	EC000899	ETIM 7.0	EC000899
ECLASS 9.0	27-14-11-16	ECLASS 9.1	27-14-11-16
ECLASS 10.0	27-14-11-16	ECLASS 11.0	27-14-11-16

Approvals

Approvals



ROHS

Conform

DownloadsApproval/Certificate/Document of
Conformity[EAC certificate](#)

Engineering Data

[EPLAN](#)

User Documentation

[StorageConditionsTerminalBlocks](#)