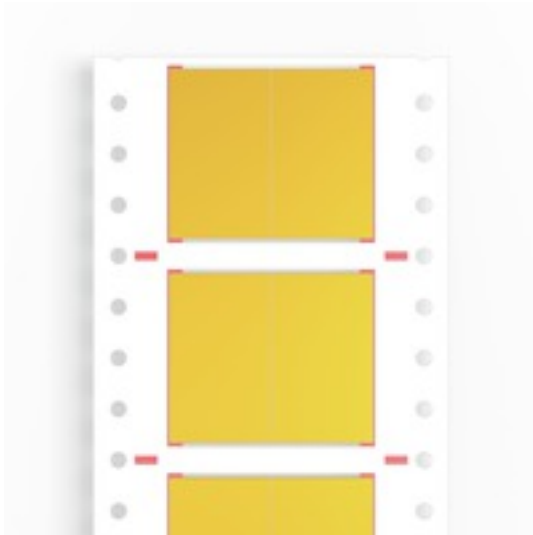


**HSS-HF 1 17.0-23.0/25Y****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Similar to illustration



The heat-shrinkable sleeve is printable on 2 sides and can be used for marking and insulating cables and wires. The flexible, heat-shrink material enables a firm, perfect fit around the conductor and therefore saves space.

**General ordering data**

|                    |                                                                                                                   |
|--------------------|-------------------------------------------------------------------------------------------------------------------|
| Version            | Conductor and cable markers, 17 - 23 mm, {Reference (AttributeDefinition) not found: pAttr74196859207437}, yellow |
| Order No.          | <a href="#">1962030000</a>                                                                                        |
| Type               | HSS-HF 1 17.0-23.0/25Y                                                                                            |
| GTIN (EAN)         | 4032248642724                                                                                                     |
| Qty.               | 1,500 pc(s).                                                                                                      |
| compatible printer | <a href="#">2599430000</a> <a href="#">2599440000</a> <a href="#">1140490000</a>                                  |

Creation date March 26, 2021 3:33:38 PM CET

## HSS-HF 1 17.0-23.0/25Y

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                |            |                 |           |
|----------------|------------|-----------------|-----------|
| Depth          | 0.77 mm    | Depth (inches)  | 0.03 inch |
| Height         | 25.4 mm    | Height (inches) | 1 inch    |
| Net weight     | 1.867 g    | Width           | 42.2 mm   |
| Width (inches) | 1.661 inch |                 |           |

## Temperatures

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -55...105 °C |
|-----------------------------|--------------|

## General data

|                                   |              |                                              |                |
|-----------------------------------|--------------|----------------------------------------------|----------------|
| Colour                            | yellow       | Halogen                                      | No             |
| Material                          | Polyolefine  | Material colour according to resistance code | 4              |
| Operating temperature range       | -55...105 °C | Operating temperature range, max.            | 105 °C         |
| Operating temperature range, min. | -55 °C       | Recommended industries                       | Transportation |
| Type of printing                  | neutral      | Width                                        | 42.2 mm        |

## Conductor and cable markers

|                                   |                    |                                  |                          |
|-----------------------------------|--------------------|----------------------------------|--------------------------|
| Conductor O.D.                    | 17 - 23 mm         | Conductor O.D., max.             | 23 mm                    |
| Conductor O.D., min.              | 17 mm              | Conductor cross-section, max.    | 120 mm <sup>2</sup>      |
| Conductor cross-section, min.     | 70 mm <sup>2</sup> | Cross-section for connected wire | 70 - 120 mm <sup>2</sup> |
| Halogen                           | No                 | Rate of shrinkage                | 2:1                      |
| Recommended shrinking temperature | 90 °C              | Text field height                | 40.6 mm                  |
| Text field width                  | 25.4 mm            |                                  |                          |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001530    | ETIM 7.0    | EC001530    |
| ECLASS 9.0  | 27-40-04-01 | ECLASS 9.1  | 27-40-04-01 |
| ECLASS 10.0 | 27-40-04-01 | ECLASS 11.0 | 27-28-11-02 |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                                             |                                                                                                                                               |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">NFX 70-100-1 2006 + NF X 70-100-2 2006</a><br><a href="#">BS EN 45545-2 2013+A1 2015</a><br><a href="#">BS EN ISO 4589-2 1999</a> |
| Engineering Data                            | <a href="#">STEP</a>                                                                                                                          |
| Engineering Data                            | <a href="#">EPLAN, WSCAD, Zuken E3.S</a>                                                                                                      |

## HSS-HF 1 17.0-23.0/25Y

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

