

IE-BS-V04P-LCD-SM-C**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

PushPull plug-in connector set according to IEC
61076-3-106 ver.4 (IEC24702), plastic with LC insert

General ordering data

Version	Flange FO, IP67, Version 4, LC Duplex coupling, Singlemode
Order No.	1963450000
Type	IE-BS-V04P-LCD-SM-C
GTIN (EAN)	4032248645541
Qty.	10 pc(s).

IE-BS-V04P-LCD-SM-C**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	45.3 mm	Depth (inches)	1.783 inch
Height	38 mm	Height (inches)	1.496 inch
Net weight	26.7 g	Width	27 mm
Width (inches)	1.063 inch		

Temperatures

Operating temperature	-40 °C...70 °C
-----------------------	----------------

General data

Colour	Miscellaneous	Connection 1	LC Duplex
Connection 2		Description of article	Version 4, LC Duplex coupling
	LC Duplex		
Fibre type	Singlemode	Housing main material	PA UL 94 V0
Insertion loss	≤ 0.5 dB	Plugging cycles	500
Protection degree	IP67	Return loss (attenuation)	≥ 40 dB

General standards

Connector standard	IEC 61076-3-106 Var. 4, IEC 61754-20
--------------------	---

Classifications

ETIM 6.0	EC001122	ETIM 7.0	EC001122
ECLASS 9.0	19-17-01-22	ECLASS 9.1	19-17-01-22
ECLASS 10.0	19-17-01-22	ECLASS 11.0	19-17-01-22

Approvals

ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	GOST Approval
Engineering Data	WSCAD
User Documentation	MAN IE GUIDE DE MAN IE GUIDE EN Designation key / Type key Manual


IE-BS-V04P-LCD-SM-C

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Installation cut-out

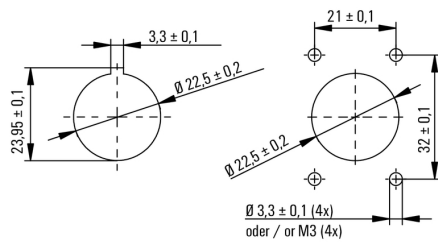

Mounting cut-out: 1. With central screw connection / 2. For mounting with four M3 screws