

IE-BH-V04P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

PushPull plug-in connector according to IEC
61076-3-106 ver.4 (IEC24702), plastic, empty housing

General ordering data

Version	Empty enclosure, Flange-mounted housing, Variant 4 to IEC 61076-3-106, IP67
Order No.	1963520000
Type	IE-BH-V04P
GTIN (EAN)	4032248645619
Qty.	10 pc(s).

IE-BH-V04P

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	28.7 mm	Depth (inches)	1.13 inch
Height	38 mm	Height (inches)	1.496 inch
Net weight	18.2 g	Width	27 mm
Width (inches)	1.063 inch		

Temperatures

Operating temperature	-40 °C...70 °C
-----------------------	----------------

General data

Colour	Miscellaneous	Housing main material	PA UL 94 V0
Plugging cycles	750	Protection degree	IP67
Type of mounting	4 screws, Central nut		

General standards

Certificate no. (cULus)	E316369	Connector standard	IEC 61076-3-106 Var. 4
-------------------------	---------	--------------------	------------------------

Classifications

ETIM 6.0	EC001031	ETIM 7.0	EC001031
ECLASS 9.0	27-18-27-02	ECLASS 9.1	27-18-27-02
ECLASS 10.0	27-18-27-02	ECLASS 11.0	27-18-27-02

Approvals

Approvals



ROHS	Conform
UL File Number Search	E316369

Downloads

Approval/Certificate/Document of Conformity	GOST Approval DUXR.E316369
User Documentation	MAN IE GUIDE DE MAN IE GUIDE EN Designation key / Type key Manual

IE-BH-V04P

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

Drawings

Installation cut-out

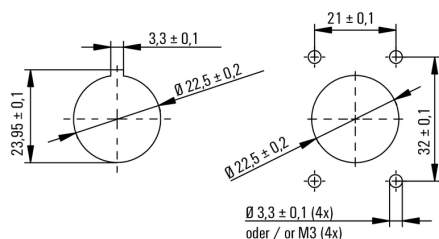

Mounting cut-out: 1. With central screw connection / 2. For mounting with four M3 screws