

IE-BH-V01M**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Bayonet plug-in connectors according to IEC
61076-3-106 ver.1 (Ethernet/IP), metal, empty housing

General ordering data

Version	Empty enclosure, Flange-mounted housing, Variant 1 to IEC 61076-3-106, IP67
Order No.	1963540000
Type	IE-BH-V01M
GTIN (EAN)	4032248645633
Qty.	10 pc(s).

IE-BH-V01M

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	23.5 mm	Depth (inches)	0.925 inch
Height	32 mm	Height (inches)	1.26 inch
Net weight	46.6 g	Width	32 mm
Width (inches)	1.26 inch		

Temperatures

Operating temperature	-40 °C...70 °C
-----------------------	----------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

General data

Colour	Miscellaneous	Housing main material	Zinc diecast
Plugging cycles	750	Protection degree	IP67
Type of mounting	4 screws, Central nut		

General standards

Connector standard	IEC 61076-3-106 Var. 1
--------------------	------------------------

Classifications

ETIM 6.0	EC001031	ETIM 7.0	EC001031
ECLASS 9.0	27-18-27-02	ECLASS 9.1	27-18-27-02
ECLASS 10.0	27-18-27-02	ECLASS 11.0	27-18-27-02

Approvals

ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	GOST Approval DUXR.E316369
Engineering Data	STEP
Engineering Data	WSCAD
Product Change Notification	Technical change to Bulkhead Variant 1 (Metal) - EN Technical change to Bulkhead Variant 1 (Metal) - DE 20190724 Technische Änderung zu Flansch Variante 1 (Metall) 20190724 Technische Änderung zu Flansch Variante 1 (Metall) 20190724 Technical change to Bulkhead Variant 1 (Metal)
User Documentation	MAN IE GUIDE DE MAN IE GUIDE EN Designation key / Type key Manual


IE-BH-V01M

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Installation cut-out

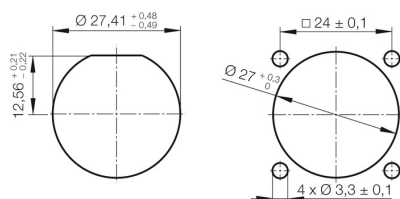

Mounting cut-out: 1. With central screw connection / 2. For mounting with four M3 screws