


**BCF 3.81/08/180LR SN OR BX**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

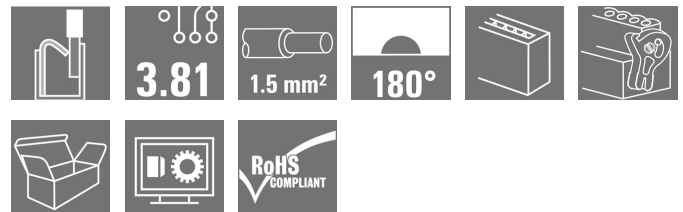**Product image**


PUSH IN - Weidmüller's innovative connection system simplifies the wire connection process.

The benefits for users and applications:

- High packaging density due to very low component height. Simply insert the prepared wire - finished
- High component density with the compact SCDN / SCDN-THR two-tier pin header
- Simplified processing due to integrated push buttons for opening the clamping unit
- Intuitive handling – since the wire-entry area and handling area are clearly separated
- tool-free locking and releasing when using Weidmüller's patented release latch (LR)

The Weidmüller plug-in connectors, pitch 3.81 mm (0.15 inch), are compatible with the layout of customary plug-in connectors, can be coded and provide space for printing.

**General ordering data**

|                     |                                                                                                                                               |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Version             | PCB plug-in connector, female plug, 3.81 mm, Number of poles: 8, 180°, PUSH IN, Tension-clamp connection, Clamping range, max. : 1.5 mm², Box |
| Order No.           | <a href="#">1972260000</a>                                                                                                                    |
| Type                | BCF 3.81/08/180LR SN OR BX                                                                                                                    |
| GTIN (EAN)          | 4032248681242                                                                                                                                 |
| Qty.                | 50 pc(s).                                                                                                                                     |
| Product data        | IEC: 320 V / 17.5 A / 0.14 - 1.5 mm²<br>UL: 300 V / 10 A / AWG 26 - AWG 16                                                                    |
| Packaging           | Box                                                                                                                                           |
| Delivery status     | <b>This article will no longer be available in the future.</b>                                                                                |
| Available until     | 2021-02-28                                                                                                                                    |
| Alternative product | <a href="#">2442660000</a>                                                                                                                    |

## BCF 3.81/08/180LR SN OR BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                |            |                 |            |
|----------------|------------|-----------------|------------|
| Depth          | 28.45 mm   | Depth (inches)  | 1.12 inch  |
| Height         | 15.09 mm   | Height (inches) | 0.594 inch |
| Net weight     | 8.52 g     | Width           | 41.07 mm   |
| Width (inches) | 1.617 inch |                 |            |

## System Parameters

|                                              |                                     |                                            |                   |
|----------------------------------------------|-------------------------------------|--------------------------------------------|-------------------|
| Product family                               | OMNIMATE Signal - series BC/SC 3.81 | Type of connection                         | Field connection  |
| Wire connection method                       | PUSH IN, Tension-clamp connection   | Pitch in mm (P)                            | 3.81 mm           |
| Pitch in inches (P)                          | 0.15 inch                           | Conductor outlet direction                 | 180°              |
| Number of poles                              | 8                                   | L1 in mm                                   | 26.67 mm          |
| L1 in inches                                 | 1.05 inch                           | Number of rows                             | 1                 |
| Pin series quantity                          | 1                                   | Rated cross-section                        | 1 mm <sup>2</sup> |
| Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch              | Touch-safe protection acc. to DIN VDE 0470 | IP 20             |
| Volume resistance                            | ≤5 mΩ                               | Can be coded                               | Yes               |
| Stripping length                             | 9 mm                                | Screwdriver blade                          | 0.4 x 2.5         |
| Screwdriver blade standard                   | DIN 5264                            | Plugging cycles                            | 25                |
| Plugging force/pole, max.                    | 8 N                                 | Pulling force/pole, max.                   | 7 N               |

## Material data

|                                       |             |                                       |                     |
|---------------------------------------|-------------|---------------------------------------|---------------------|
| Insulating material                   | PA 66 GF 30 | Colour                                | orange              |
| Colour chart (similar)                | RAL 2000    | Insulating material group             | II                  |
| Comparative Tracking Index (CTI)      | ≥ 550       | Insulation strength                   | ≥ 10 <sup>8</sup> Ω |
| UL 94 flammability rating             | V-0         | Contact material                      | Copper alloy        |
| Contact surface                       | tinned      | Layer structure of plug contact       | 4...8 µm Sn matt    |
| Storage temperature, min.             | -40 °C      | Storage temperature, max.             | 70 °C               |
| Operating temperature, min.           | -50 °C      | Operating temperature, max.           | 120 °C              |
| Temperature range, installation, min. | -25 °C      | Temperature range, installation, max. | 120 °C              |

## Conductors suitable for connection

|                                                                      |                        |
|----------------------------------------------------------------------|------------------------|
| Clamping range, min.                                                 | 0.14 mm <sup>2</sup>   |
| Clamping range, max.                                                 | 1.5 mm <sup>2</sup>    |
| Wire connection cross section AWG, min.                              | AWG 26                 |
| Wire connection cross section AWG, max.                              | AWG 16                 |
| Solid, min. H05(07) V-U                                              | 0.14 mm <sup>2</sup>   |
| Solid, max. H05(07) V-U                                              | 1.5 mm <sup>2</sup>    |
| Flexible, min. H05(07) V-K                                           | 0.14 mm <sup>2</sup>   |
| Flexible, max. H05(07) V-K                                           | 1.5 mm <sup>2</sup>    |
| w. plastic collar ferrule, DIN 46228 pt 4, 0.25 mm <sup>2</sup> min. |                        |
| w. plastic collar ferrule, DIN 46228 pt 4, 1 mm <sup>2</sup> max.    |                        |
| w. wire end ferrule, DIN 46228 pt 1, min.                            | 0.25 mm <sup>2</sup>   |
| w. wire end ferrule, DIN 46228 pt 1, max.                            | 1.5 mm <sup>2</sup>    |
| Plug gauge in accordance with EN 60999 a x b; ø                      | 2.4 mm x 1.5 mm; 1.9mm |

## BCF 3.81/08/180LR SN OR BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

|                     |                                        |                              |                             |       |
|---------------------|----------------------------------------|------------------------------|-----------------------------|-------|
| Clampable conductor | Cross-section for conductor connection | Type                         | fine-wired                  |       |
|                     |                                        | nominal                      | 0.5 mm <sup>2</sup>         |       |
|                     | wire end ferrule                       | Stripping length             | nominal                     | 12 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H0.5/16 OR</a>  |       |
|                     |                                        | Stripping length             | nominal                     | 10 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H0.5/10</a>     |       |
|                     | Cross-section for conductor connection | Type                         | fine-wired                  |       |
|                     |                                        | nominal                      | 0.75 mm <sup>2</sup>        |       |
|                     | wire end ferrule                       | Stripping length             | nominal                     | 12 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H0.75/16 W</a>  |       |
|                     |                                        | Stripping length             | nominal                     | 10 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H0.75/10</a>    |       |
|                     | Cross-section for conductor connection | Type                         | fine-wired                  |       |
|                     |                                        | nominal                      | 1 mm <sup>2</sup>           |       |
|                     | wire end ferrule                       | Stripping length             | nominal                     | 12 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H1.0/16D R</a>  |       |
|                     |                                        | Stripping length             | nominal                     | 10 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H1.0/10</a>     |       |
|                     | Cross-section for conductor connection | Type                         | fine-wired                  |       |
|                     |                                        | nominal                      | 0.34 mm <sup>2</sup>        |       |
|                     | wire end ferrule                       | Stripping length             | nominal                     | 10 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H0.34/12 TK</a> |       |

Reference text The outside diameter of the plastic collar should not be larger than the pitch (P). Length of ferrules is to be chosen depending on the product and the rated voltage.

## Rated data acc. to IEC

|                                                                           |                        |                                                                       |                  |
|---------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------|------------------|
| tested acc. to standard                                                   | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C)                         | 17.5 A           |
| Rated current, max. number of poles (Tu=20°C)                             | 17.5 A                 | Rated current, min. number of poles (Tu=40°C)                         | 17.5 A           |
| Rated current, max. number of poles (Tu=40°C)                             | 16.3 A                 | Rated voltage for surge voltage class / pollution degree II/2         | 320 V            |
| Rated voltage for surge voltage class / pollution degree III/2            | 160 V                  | Rated voltage for surge voltage class / pollution degree III/3        | 160 V            |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 2.5 kV                 | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 2.5 kV           |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 2.5 kV                 | Short-time withstand current resistance                               | 3 x 1s with 76 A |

## BCF 3.81/08/180LR SN OR BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Rated data acc. to CSA

Institute (CSA)



Certificate No. (CSA)

200039-1121690

|                                   |                                                                        |
|-----------------------------------|------------------------------------------------------------------------|
| Rated voltage (Use group B / CSA) | 300 V                                                                  |
| Rated voltage (Use group D / CSA) | 300 V                                                                  |
| Rated current (Use group C / CSA) | 11 A                                                                   |
| Wire cross-section, AWG, min.     | AWG 26                                                                 |
| Reference to approval values      | Specifications are maximum values, details - see approval certificate. |

|                                   |        |
|-----------------------------------|--------|
| Rated voltage (Use group C / CSA) | 50 V   |
| Rated current (Use group B / CSA) | 11 A   |
| Rated current (Use group D / CSA) | 11 A   |
| Wire cross-section, AWG, max.     | AWG 16 |

## Rated data acc. to UL 1059

Institute (cURus)



Certificate No. (cURus)

E60693

|                                       |                                                                        |
|---------------------------------------|------------------------------------------------------------------------|
| Rated voltage (Use group B / UL 1059) | 300 V                                                                  |
| Rated current (Use group B / UL 1059) | 10 A                                                                   |
| Wire cross-section, AWG, min.         | AWG 26                                                                 |
| Reference to approval values          | Specifications are maximum values, details - see approval certificate. |

|                                       |        |
|---------------------------------------|--------|
| Rated voltage (Use group D / UL 1059) | 300 V  |
| Rated current (Use group D / UL 1059) | 10 A   |
| Wire cross-section, AWG, max.         | AWG 16 |

## Packing

|           |        |            |        |
|-----------|--------|------------|--------|
| Packaging | Box    | VPE length | 20 mm  |
| VPE width | 210 mm | VPE height | 255 mm |

## Type tests

|                                              |            |                                                                                                                                             |
|----------------------------------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Test: Durability of markings                 | Standard   | DIN EN 61984 section 7.3.2 / 09.02 taking pattern from DIN EN 60068-2-70 / 07.96                                                            |
|                                              | Test       | mark of origin, type identification, rated voltage, rated cross-section, pitch, type of material, approval marking UL, approval marking CSA |
|                                              | Evaluation | available                                                                                                                                   |
|                                              | Test       | durability                                                                                                                                  |
| Test: Misengagement (Non-interchangeability) | Evaluation | passed                                                                                                                                      |
|                                              | Standard   | DIN EN 61984 section 6.3 and 6.9.1 / 09.02, DIN EN 60512-13-5 / 11.06                                                                       |
|                                              | Test       | 180° turned without coding elements                                                                                                         |
|                                              | Evaluation | passed                                                                                                                                      |
|                                              | Test       | visual examination                                                                                                                          |
|                                              | Evaluation | passed                                                                                                                                      |

## BCF 3.81/08/180LR SN OR BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

|                                                           |                |                                                                                    |                               |
|-----------------------------------------------------------|----------------|------------------------------------------------------------------------------------|-------------------------------|
| Test: Clampable cross section                             | Standard       | DIN EN 60999-1 section 7 and 9.1 / 12.00, DIN EN 60947-1 section 8.2.4.5.1 / 12.02 |                               |
|                                                           | Conductor type | Type of conductor and conductor cross-section                                      | solid 0.14 mm <sup>2</sup>    |
|                                                           |                | Type of conductor and conductor cross-section                                      | stranded 0.14 mm <sup>2</sup> |
|                                                           |                | Type of conductor and conductor cross-section                                      | solid 1.5 mm <sup>2</sup>     |
|                                                           |                | Type of conductor and conductor cross-section                                      | stranded 1.5 mm <sup>2</sup>  |
|                                                           |                | Type of conductor and conductor cross-section                                      | AWG 26/1                      |
|                                                           |                | Type of conductor and conductor cross-section                                      | AWG 26/19                     |
|                                                           |                | Type of conductor and conductor cross-section                                      | AWG 16/1                      |
|                                                           |                | Type of conductor and conductor cross-section                                      | AWG 16/19                     |
|                                                           | Evaluation     | passed                                                                             |                               |
| Test for damage to and accidental loosening of conductors | Standard       | DIN EN 60999-1 section 9.4 / 12.00                                                 |                               |
|                                                           | Requirement    | 0.2 kg                                                                             |                               |
|                                                           | Conductor type | Type of conductor and conductor cross-section                                      | stranded 0.25 mm <sup>2</sup> |
|                                                           |                | Type of conductor and conductor cross-section                                      | AWG 26/1                      |
|                                                           |                | Type of conductor and conductor cross-section                                      | AWG 16/19                     |
|                                                           | Evaluation     | passed                                                                             |                               |
|                                                           | Requirement    | 0.3 kg                                                                             |                               |
|                                                           | Conductor type | Type of conductor and conductor cross-section                                      | solid 0.5 mm <sup>2</sup>     |
|                                                           |                |                                                                                    |                               |
|                                                           | Evaluation     | passed                                                                             |                               |
|                                                           | Requirement    | 0.4 kg                                                                             |                               |
|                                                           | Conductor type | Type of conductor and conductor cross-section                                      | solid 1.5 mm <sup>2</sup>     |
|                                                           |                | Type of conductor and conductor cross-section                                      | stranded 1.5 mm <sup>2</sup>  |
|                                                           |                | Type of conductor and conductor cross-section                                      | AWG 16/1                      |
|                                                           |                | Type of conductor and conductor cross-section                                      | AWG 16/19                     |
|                                                           | Evaluation     | passed                                                                             |                               |

## BCF 3.81/08/180LR SN OR BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

|               |                |                                               |                               |
|---------------|----------------|-----------------------------------------------|-------------------------------|
| Pull-out test | Standard       | DIN EN 60999-1 section 9.5 / 12.00            |                               |
|               | Requirement    | ≥10 N                                         |                               |
|               | Conductor type | Type of conductor and conductor cross-section | stranded 0.25 mm <sup>2</sup> |
|               |                | Type of conductor and conductor cross-section | AWG 26/1                      |
|               |                | Type of conductor and conductor cross-section | AWG 26/19                     |
|               | Evaluation     | passed                                        |                               |
|               | Requirement    | ≥20 N                                         |                               |
|               | Conductor type | Type of conductor and conductor cross-section | H05V-U0.5                     |
|               |                | passed                                        |                               |
|               |                | ≥40 N                                         |                               |
|               | Conductor type | Type of conductor and conductor cross-section | H07V-U1.5                     |
|               |                | Type of conductor and conductor cross-section | H07V-K1.5                     |
|               |                | Type of conductor and conductor cross-section | AWG 16/1                      |
|               |                | Type of conductor and conductor cross-section | AWG 16/19                     |
|               | Evaluation     | passed                                        |                               |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002638    | ETIM 7.0    | EC002638    |
| ECLASS 9.0  | 27-44-03-09 | ECLASS 9.1  | 27-44-03-09 |
| ECLASS 10.0 | 27-44-03-09 | ECLASS 11.0 | 27-46-02-02 |

## BCF 3.81/08/180LR SN OR BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Important note

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Notes          | <ul style="list-style-type: none"> <li>• Additional colours on request</li> <li>• Rated current related to rated cross-section &amp; min. No. of poles.</li> <li>• P on drawing = pitch</li> <li>• Conductors suitable for connection: 1.5 mm<sup>2</sup> with wire-end ferrule with plastic collar, DIN 46 228/1, with a rated voltage of 125V/2.5 kV with III/3 or 250 V/2.5 kV with II/2</li> <li>• Crimp shape A for wire-end ferrules with crimping tools PZ 1,5 (order no. 9005990000) or PZ 6/5 (order no. 9011460000) for larger wire cross-sections recommended.</li> <li>• Wire end ferrule without plastic collar to DIN 46228/1</li> <li>• Wire end ferrule with plastic collar to DIN 46228/4</li> <li>• Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.</li> <li>• The test point can only be used as potential-pickup point.</li> <li>• Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months</li> </ul> |

## Approvals

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E60693  |

## Downloads

|                                             |                                                                                                                    |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">CB Certificate</a><br><a href="#">CB Testreport</a><br><a href="#">Declaration of the Manufacturer</a> |
| Engineering Data                            | <a href="#">STEP</a>                                                                                               |
| Engineering Data                            | <a href="#">EPLAN.WSCAD</a>                                                                                        |
| Product Change Notification                 | <a href="#">PCN_2017_190_PL30X_BL_381_Lock_Release_lever_EN</a>                                                    |
| User Documentation                          | <a href="#">BPZL_PUSH_IN_Connectors_BCF_3_81_EN</a>                                                                |


## BCF 3.81/08/180LR SN OR BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

# Drawings


## Dimensional drawing

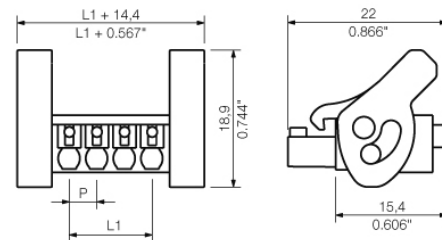

## Graph




## Graph

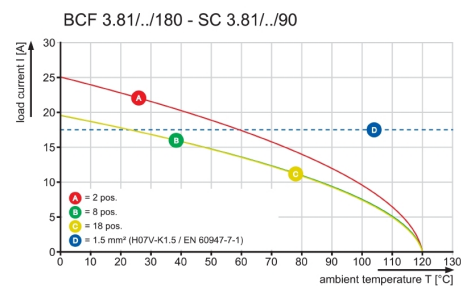

## Graph



## Product benefits

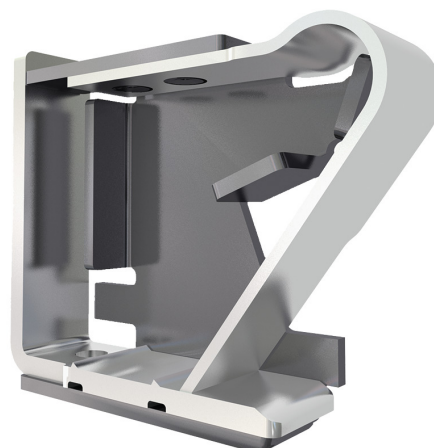

**Solid PUSH IN contact**  
Safe and durable


### BCF 3.81/08/180LR SN OR BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)



## Drawings

### Product benefits

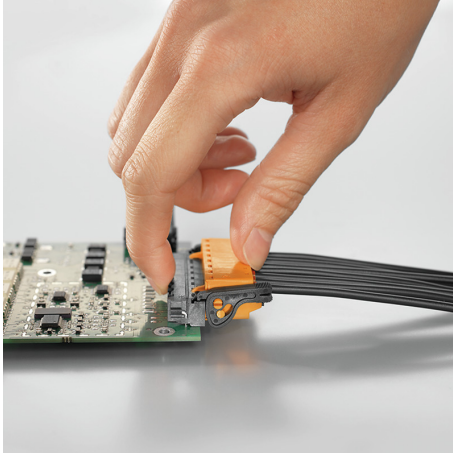

Self-locking  
Immediately on plugging in

© Weidmueller Interface GmbH & Co. KG

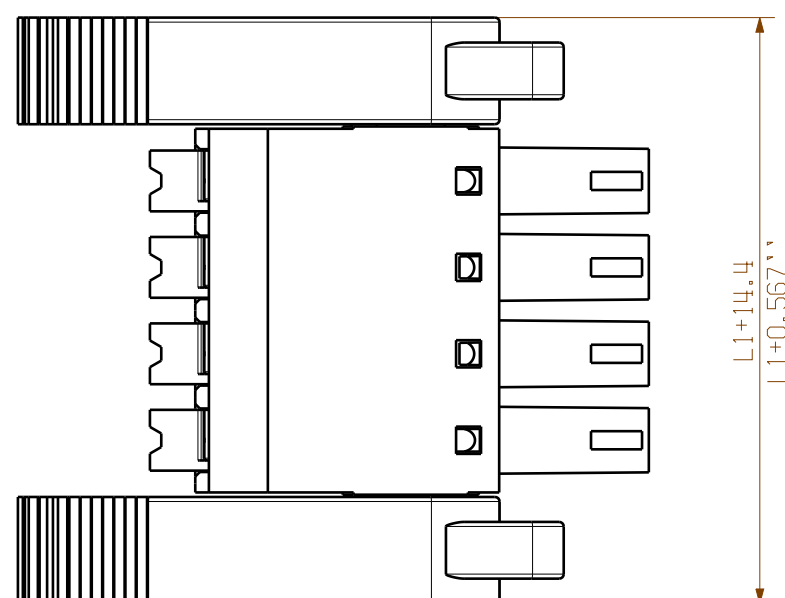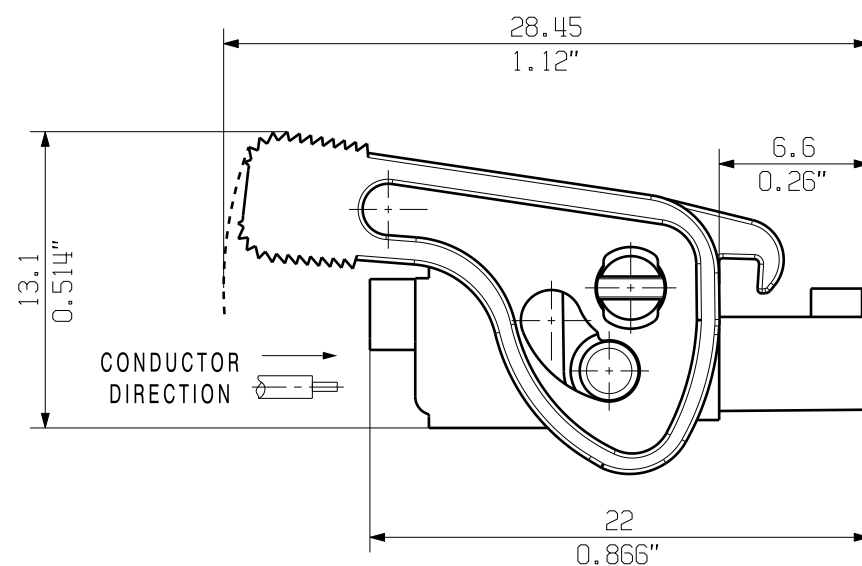

P = 3.81 RASTER  
0.15" PITCH

|    |         |           |
|----|---------|-----------|
| 20 | 72.39   | 2.850     |
| 19 | 68.58   | 2.700     |
| 18 | 64.77   | 2.550     |
| 17 | 60.96   | 2.400     |
| 16 | 57.15   | 2.250     |
| 15 | 53.34   | 2.100     |
| 14 | 49.53   | 1.950     |
| 13 | 45.72   | 1.800     |
| 12 | 41.91   | 1.650     |
| 11 | 38.10   | 1.500     |
| 10 | 34.29   | 1.350     |
| 9  | 30.48   | 1.200     |
| 8  | 26.67   | 1.050     |
| 7  | 22.86   | 0.900     |
| 6  | 19.05   | 0.750     |
| 5  | 15.24   | 0.600     |
| 4  | 11.43   | 0.450     |
| 3  | 7.62    | 0.300     |
| 2  | 3.81    | 0.150     |
| n  | L1 [mm] | L1 [inch] |

|                                                                                       |  |                             |            |                                                                                                      |                                                                                       |  |                                                |  |      |
|---------------------------------------------------------------------------------------|--|-----------------------------|------------|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--|------------------------------------------------|--|------|
| GENERAL TOLERANCE:<br>DIN ISO 2768-m                                                  |  | 86251/0<br>26.05.16 XIANG_K |            | 00                                                                                                   |  |  | Cat.no.: .                                     |  |      |
|  |  | Modification                |            | <b>C 63182</b>  |                                                                                       |  |                                                |  |      |
| Max. nos.                                                                             |  |                             |            |                                                                                                      |                                                                                       |  | Drawing no. Issue no.<br>Sheet 00 of 00 sheets |  |      |
|  |  | Date                        | Name       |                                                                                                      | <b>BCF 3.81...180LR...</b><br>BUCHSENLEISTE<br>SOCKET BLOCK                           |  |                                                |  |      |
|                                                                                       |  | Drawn                       | 17.02.2016 | XIANG_K                                                                                              |                                                                                       |  |                                                |  |      |
|                                                                                       |  | Responsible                 |            | XIANG_K                                                                                              |                                                                                       |  |                                                |  |      |
| Scale: 3/1                                                                            |  | Checked                     | 26.05.2016 | ZHOU_N                                                                                               |                                                                                       |  |                                                |  |      |
| Supersedes: .                                                                         |  | Approved                    |            | XU_S                                                                                                 | Product file: BCF 3.81                                                                |  |                                                |  | 7072 |