

Article No. : 1FT2205-2AH11-1SA0-Z
Q31

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :



Figure similar

Basic motor data

Motor type	Permanent-magnet synchronous motor, Natural cooling, IP65
Motor type	Compact
Static torque	3.60 Nm
Static current	3.8 A
Maximum torque	10.80 Nm
Maximum current	12.1 A
Maximum speed	8,300 rpm
Rotor moment of inertia	4.0500 kgcm ²
Weight	4.8 kg

Rated data

SINAMICS S210, 3AC 400V

Rated speed	4,500 rpm
Rated torque	2.25 Nm
Rated current	2.6 A
Rated power	1.06 kW

Encoder system


Encoder system	Encoder AS22DQC: Absolute encoder single turn 22 bit
----------------	--

Motor connection

Connection type	OCC for S210
Connector size	M17

Mechanical data

Design acc. to Code I	IM B5 (IM V1, IM V3)
Vibration severity grade	Grade A
Shaft height	48
Flange size (AB)	95 mm
Centering ring (N)	80 mm
Hole circle (M)	100 mm
Screw-on hole (S)	6.5 mm
Overall length (LB)	188 mm
Diameter of shaft (D)	19 mm
Length of shaft (E)	40 mm
Length of flange diagonal (P)	120 mm
Shaft end	Fitted key
Color of the housing	Standard (Anthracite, similar to RAL 7016)

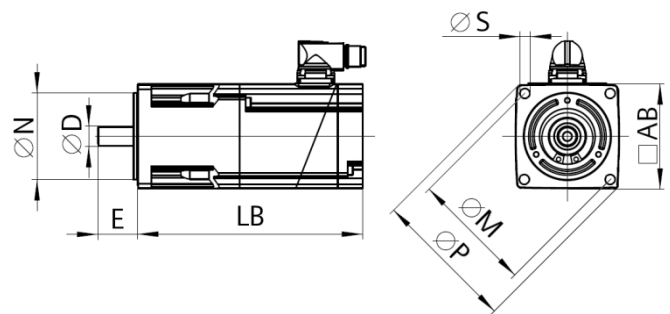

Holding brake

Holding torque	8.00 Nm
Average dynamic torque	5.00 Nm
Opening time	35 ms
Closing time	20 ms
Maximum single switching energy ¹⁾	570 J
Service life, operating energy	284,000 J
Holding current ²⁾	0.3 A
Break-induced current for 500 ms ²⁾	1.1 A

Special design

Q31 Metal rating plate on the motor

¹⁾Up to three consecutive emergency stops and up to 25% of all emergency stops as a Wmax high energy stop possible.

²⁾Typical value for 20°C ambient temperature. At -15°C the break-induced currents can be increased by up to 30%.