


PRODUCT-DETAILS

TA200DU-135-V1000

TA200DU-135-V1000 Thermal Overload Relay

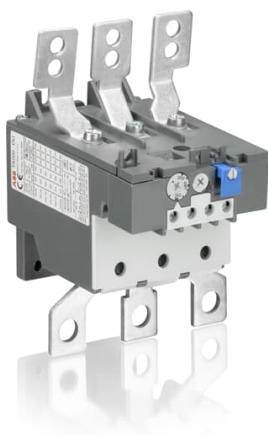

General Information

Extended Product Type	TA200DU-135-V1000
Product ID	1SAZ421301R1003
EAN	4013614305924
Catalog Description	TA200DU-135-V1000 Thermal Overload Relay
Long Description	The TA200DU-135-V1000 thermal overload relay is an economic electromechanical protection device for the main circuit. It offers reliable and fast protection for motors in the event of overload or phase failure. The device has trip class 10A. Further features are the temperature compensation, trip contact (NC), signal contact (NO), automatic- or manual reset selectable, trip-free mechanism, STOP- and Test function and a trip indication. The overload relays are connected directly to the block contactors. Single mounting kits are available as accessory.

Ordering

Minimum Order Quantity	1 piece
Customs Tariff Number	85364900

Popular Downloads

Data Sheet, Technical Information	1SBC100173C0201
Instructions and Manuals	2CDC106028M6801
Instructions and Manuals (Part 2)	2CDC106006M5702

Time-Current Characteristic Curve	1SAZ400502F0003
Dimension Diagram	1SAZ400401F0001

Dimensions

Product Net Width	104 mm
Product Net Height	151 mm
Product Net Depth / Length	126 mm
Product Net Weight	0.76 kg

Technical

Setting Range	100 ... 135 A
Rated Operational Voltage	Auxiliary Circuit 440 V DC Auxiliary Circuit 500 V AC Main Circuit 690 V AC
Rated Operational Current (I_e)	135 A
Rated Operational Current AC-3 (I_e)	135 A
Rated Frequency (f)	Auxiliary Circuit 50 Hz Auxiliary Circuit 60 Hz Auxiliary Circuit DC Main Circuit 60 Hz Main Circuit 50 Hz Main Circuit DC
Rated Impulse Withstand Voltage (U_{imp})	Auxiliary Circuit 6 kV Main Circuit 6 kV
Rated Insulation Voltage (U_i)	690 V
Number of Poles	3
Number of Auxiliary Contacts NC	1
Number of Auxiliary Contacts NO	1
Number of Protected Poles	3
Conventional Free-air Thermal Current (I_{th})	Auxiliary Circuit NC 10 A Auxiliary Circuit NO 6 A
Rated Operational Current AC-15 (I_e)	(120 V) NC 3 A (120 V) NO 1.5 A (240 V) NC 3 A (240 V) NO 1.5 A (400 V) NC 1.9 A (400 V) NO 1 A (440 V) NC 1 A (440 V) NO 1 A (500 V) NC 1 A (500 V) NO 1 A
Rated Operational Current DC-13 (I_e)	(125 V) NC 0.25 A (125 V) NO 0.25 A (24 V) NC 1.25 A (24 V) NO 1.25 A (250 V) NC 0.12 A (250 V) NO 0.04 A (60 V) NC 0.25 A (60 V) NO 0.25 A
Degree of Protection	Housing IP20 Main Circuit Terminals IP00
Pollution Degree	3
Connecting Capacity Auxiliary Circuit	Flexible with Ferrule 1/2x 0.75 ... 2.5 mm ² Flexible 1/2x 0.75 ... 2.5 mm ²

	Rigid 1/2x 0.75 ... 4 mm ²
Connecting Capacity	Hole Diameter > 10 mm ²
Main Circuit	Rigid or Flexible with Cable Lug 1x 25 ... 120 mm ²
Tightening Torque	Auxiliary Circuit 1 ... 1.3 N-m Main Circuit 25 N-m
Wire Stripping Length	Auxiliary Circuit 9 mm
Recommended Screw Driver	Auxiliary Circuit Pozidriv 1 Main Circuit Open Bars
Mounting Position	Position 1 to 6
Power Loss	at Rated Operating Conditions per Pole 3.3 W
Suitable For	A145 A185 AF145 AF185 AF190 AF205
Standards	IEC/EN 60947-1 IEC/EN 60947-4-1 IEC/EN 60947-5-1 UL 60947-1 UL 60947-4-1

Technical UL/CSA

Maximum Operating Voltage UL/CSA	Main Circuit 600 V AC
Ampere Rating UL/CSA	135 A
Contact Rating UL/CSA	(NO:) B600 (NC:) C600
Connecting Capacity Main Circuit UL/CSA	Flexible 1x 4-0000 AWG Stranded 1x 4-0000 AWG
Connecting Capacity Auxiliary Circuit UL/CSA	Flexible 1/2x 18-14 AWG Stranded 1/2x 18-14 AWG
Tightening Torque UL/CSA	Auxiliary Circuit 12 in-lb Main Circuit 220 in-lb

Environmental

Ambient Air Temperature	Operation -25 ... +55 °C Operation Compensated -25 ... +55 °C Storage -40 ... +70 °C
Ambient Air Temperature Compensation	Yes
Maximum Operating Altitude Permissible	2000 m
Resistance to Shock acc. to IEC 60068-2-27	11 ms Pulse 12g
RoHS Status	Following EU Directive 2011/65/EU

Certificates and Declarations (Document Number)

ABS Certificate	1SAA941000-0102
ATEX Certificate	1SAA941000-3901
BV Certificate	1SAA941000-0201
CB Certificate	1SAA941004-2003
CQC Certificate	CQC2016010309922936
cUL Certificate	cUL_E48139
Declaration of Conformity - CCC	2020980304001321
Declaration of Conformity - CE	1SAD938517-0043

DNV Certificate	1SAA941000-0304
DNV GL Certificate	1SAA941000-0304
EAC Certificate	1SAA941002-2702
Environmental Information	1SAC200056H0009
GL Certificate	1SAA941000-0304
GOST Certificate	1SAA941000-2704
Instructions and Manuals	2CDC106028M6801
Instructions and Manuals (Part 2)	2CDC106006M5702
LR Certificate	1SAA941000-0504
RMRS Certificate	1SAA941000-0704
RoHS Information	1SAD938514-0043
Time-Current Characteristic Curve	1SAZ400502F0003
UL Certificate	UL_E48139

Container Information

Package Level 1 Units	1 piece
Package Level 1 Width	165 mm
Package Level 1 Height	133 mm
Package Level 1 Depth / Length	151 mm
Package Level 1 Gross Weight	1.01 kg
Package Level 1 EAN	4013614305924
Package Level 2 Units	4 piece
Package Level 2 Width	280 mm
Package Level 2 Height	210 mm
Package Level 2 Depth / Length	395 mm
Package Level 2 Gross Weight	8.786 kg
Package Level 2 EAN	4013614494314

Classifications

Object Classification Code	F
ETIM 4	EC000106 - Thermal overload relay
ETIM 5	EC000106 - Thermal overload relay
ETIM 6	EC000106 - Thermal overload relay
ETIM 7	EC000106 - Thermal overload relay
eClass	V11.0 : 27371501
UNSPSC	39121520
IDEA Granular Category Code (IGCC)	5364 >> Overload relay

Accessories

Identifier	Description	Type	Quantity	Unit Of Measure
1SAZ401110R0001	DB200 Single Mounting Kit	DB200	1	piece
1SAZ401901R1001	LT200/A Terminal Shroud	LT200/A	1	piece
1SFA616162R1014	KPR3-101L Reset Pushbutton	KPR3-101L	1	piece

Where Used (as a spare part for "Products")

Identifier	Description	Quantity	Unit Of Measure
ACS 6000	No Description Available	1	piece

Product specific part data

Product	Category	Drive Part Category
ACS 6000	ACS6000	Protection and Monitoring Devices (Surge Arresters etc.)

Categories

Low Voltage Products and Systems → Control Products → Contactors → Thermal Overload Relays
Drives → Medium voltage AC drives → Industrial drives → ACS6000

