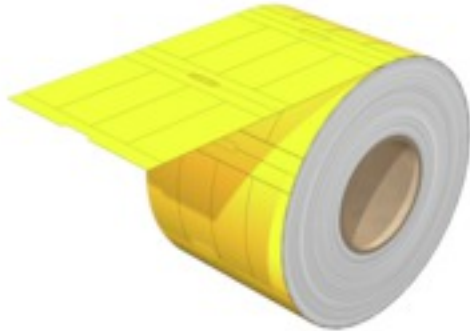


**ELS 16/40 MM GE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**ELS**

ELS tags are special and non-adhesive insertable labels for WKM cable markers or for group tag carriers. The matt, thin but tear-resistant polyester provides very good labelling and excellent readability. Used in combination with water-repellent WKM sleeves, the solution guarantees particularly long-lasting identification of cables even in harsh environments.

**General ordering data**

|                    |                                                                                               |
|--------------------|-----------------------------------------------------------------------------------------------|
| Version            | ELS, Insert markers, {Reference (AttributeDefinition) not found: pAttr74196859207437}, yellow |
| Order No.          | <a href="#">2005260000</a>                                                                    |
| Type               | ELS 16/40 MM GE                                                                               |
| GTIN (EAN)         | 4050118389975                                                                                 |
| Qty.               | 2,000 pc(s).                                                                                  |
| compatible printer | <a href="#">2599430000</a> <a href="#">2599440000</a>                                         |

Creation date March 26, 2021 8:36:22 PM CET

**ELS 16/40 MM GE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|                |           |                 |            |
|----------------|-----------|-----------------|------------|
| Depth          | 0.14 mm   | Depth (inches)  | 0.006 inch |
| Height         | 40 mm     | Height (inches) | 1.575 inch |
| Net weight     | 0.175 g   | Width           | 16 mm      |
| Width (inches) | 0.63 inch |                 |            |

**Temperatures**

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -40...150 °C |
|-----------------------------|--------------|

**General data**

|                                   |              |                                   |        |
|-----------------------------------|--------------|-----------------------------------|--------|
| Colour                            | yellow       | Halogen                           | No     |
| Material                          | Polyester    | Number per roll                   | 2,000  |
| Operating temperature range       | -40...150 °C | Operating temperature range, max. | 150 °C |
| Operating temperature range, min. | -40 °C       | UL 94 flammability rating         | HB     |
| Version                           | halogen-free | Width                             | 16 mm  |

**Conductor and cable markers**

|         |    |
|---------|----|
| Halogen | No |
|---------|----|

**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001530    | ETIM 7.0    | EC001530    |
| ECLASS 9.0  | 27-40-04-01 | ECLASS 9.1  | 27-40-04-01 |
| ECLASS 10.0 | 27-40-04-01 | ECLASS 11.0 | 27-28-11-02 |

**Approvals**

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

**Downloads**

|                  |                                          |
|------------------|------------------------------------------|
| Engineering Data | <a href="#">STEP</a>                     |
| Engineering Data | <a href="#">EPLAN, WSCAD, Zuken E3.S</a> |

### ELS 16/40 MM GE

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

