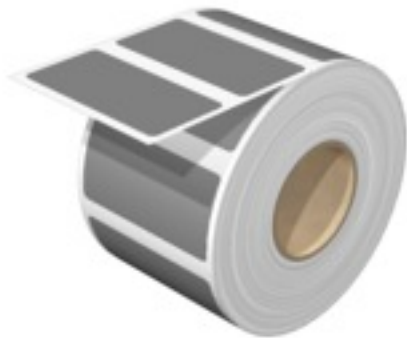


CC 30/60 MM GR**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Standard included: CC**

Our systematically matching product range includes labels for identifying standardised components, as well as all-purpose and familiar formats such as the CC 85/54 marker for nameplates.

Your benefits with MultiMark

- “Different materials for various requirements”
- Can be used with equipment from many manufacturers
- Device markers with a familiar design

General ordering data

Version	ClipCard, Device markers, {Reference (AttributeDefinition) not found: pAttr74196859207437}, grey
Order No.	2005370000
Type	CC 30/60 MM GR
GTIN (EAN)	4050118390797
Qty.	450 pc(s).
compatible printer	2599430000 2599440000

Creation date March 26, 2021 8:37:10 PM CET

CC 30/60 MM GR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	0.1 mm	Depth (inches)	0.004 inch
Height	30 mm	Height (inches)	1.181 inch
Net weight	0.571 g	Width	60 mm
Width (inches)	2.362 inch		

Temperatures

Operating temperature range	-40...120 °C
-----------------------------	--------------

General data

Adhesive	Acrylate adhesive	Approval acc. to UL 969	Yes
Colour	grey	Halogen	No
Material	Polyester	Number of markers per combination	1 Label reel = Device markers
Number per roll	450	Operating temperature range	-40...120 °C
Operating temperature range, max.	120 °C	Operating temperature range, min.	-40 °C
UL 94 flammability rating	V-0	Version	Self-adhesive, halogen-free
Width	60 mm		

Device markers

Halogen	No
---------	----

Classifications

ETIM 6.0	EC001288	ETIM 7.0	EC001288
ECLASS 9.0	27-40-06-29	ECLASS 9.1	27-40-06-29
ECLASS 10.0	27-40-06-29	ECLASS 11.0	27-28-11-04

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	STEP
Engineering Data	EPLAN, WSCAD

CC 30/60 MM GR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Drawings

