

BV/SV 7.62HP KO RD 2022**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Similar to illustration

The pluggable connections for power electronics - optimised for modern drive technologies, e.g. motor starters, frequency converters and servo-controllers.

OMNIMATE Power sets the new standard – with increased safety and innovative solutions such as the pluggable shield, integrated signal contacts and one-handed operation.

The three product lines offer you further advantages:

- Application-oriented scalability: from the compact 4 mm² connector for 29 A (IEC) or 20 A (UL) up to the sturdy 16 mm² connector for 76 A (IEC) or 54 A (UL)
- Unlimited usage up to 1,000 V (IEC) or 600 V (UL)
- A variety of application optimised mounting options

Our Service:

Design your individual connectors simply by using the

General ordering data

Version	PCB plug-in connector, Accessories, Coding element, red, Number of poles: 1
Order No.	2007300000
Type	BV/SV 7.62HP KO RD 2022
GTIN (EAN)	4050118392715
Qty.	20 pc(s).
Product data	
Packaging	Box

BV/SV 7.62HP KO RD 2022

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight	1.45 g
------------	--------

Material data

Insulating material	PA 66	Colour	red
Colour chart (similar)	RAL 3020	Storage temperature, min.	-40 °C
Storage temperature, max.	70 °C	Operating temperature, min.	-50 °C
Operating temperature, max.	100 °C	Temperature range, installation, min.	-25 °C
Temperature range, installation, max.	100 °C		

Rated data acc. to IEC

tested acc. to standard	IEC 60664-1, IEC 61984
-------------------------	------------------------

Packing

Packaging	Box	VPE length	38 mm
VPE width	90 mm	VPE height	95 mm

Classifications

ETIM 6.0	EC002943	ETIM 7.0	EC002943
ECLASS 9.0	27-44-04-92	ECLASS 9.1	27-44-04-92
ECLASS 10.0	27-44-04-92	ECLASS 11.0	27-46-04-01

Important note

IPC conformity	Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.
Notes	Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months

Approvals

ROHS	Conform
------	---------

Downloads



Approval/Certificate/Document of Conformity	Declaration of the Manufacturer
---	---

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. Weidmüller exclusively reserves the right to file for patents, utility models or designs.

© Weidmüller Interface GmbH & Co. KG

Dimensions without tolerances are no check dimensions

The English version is binding

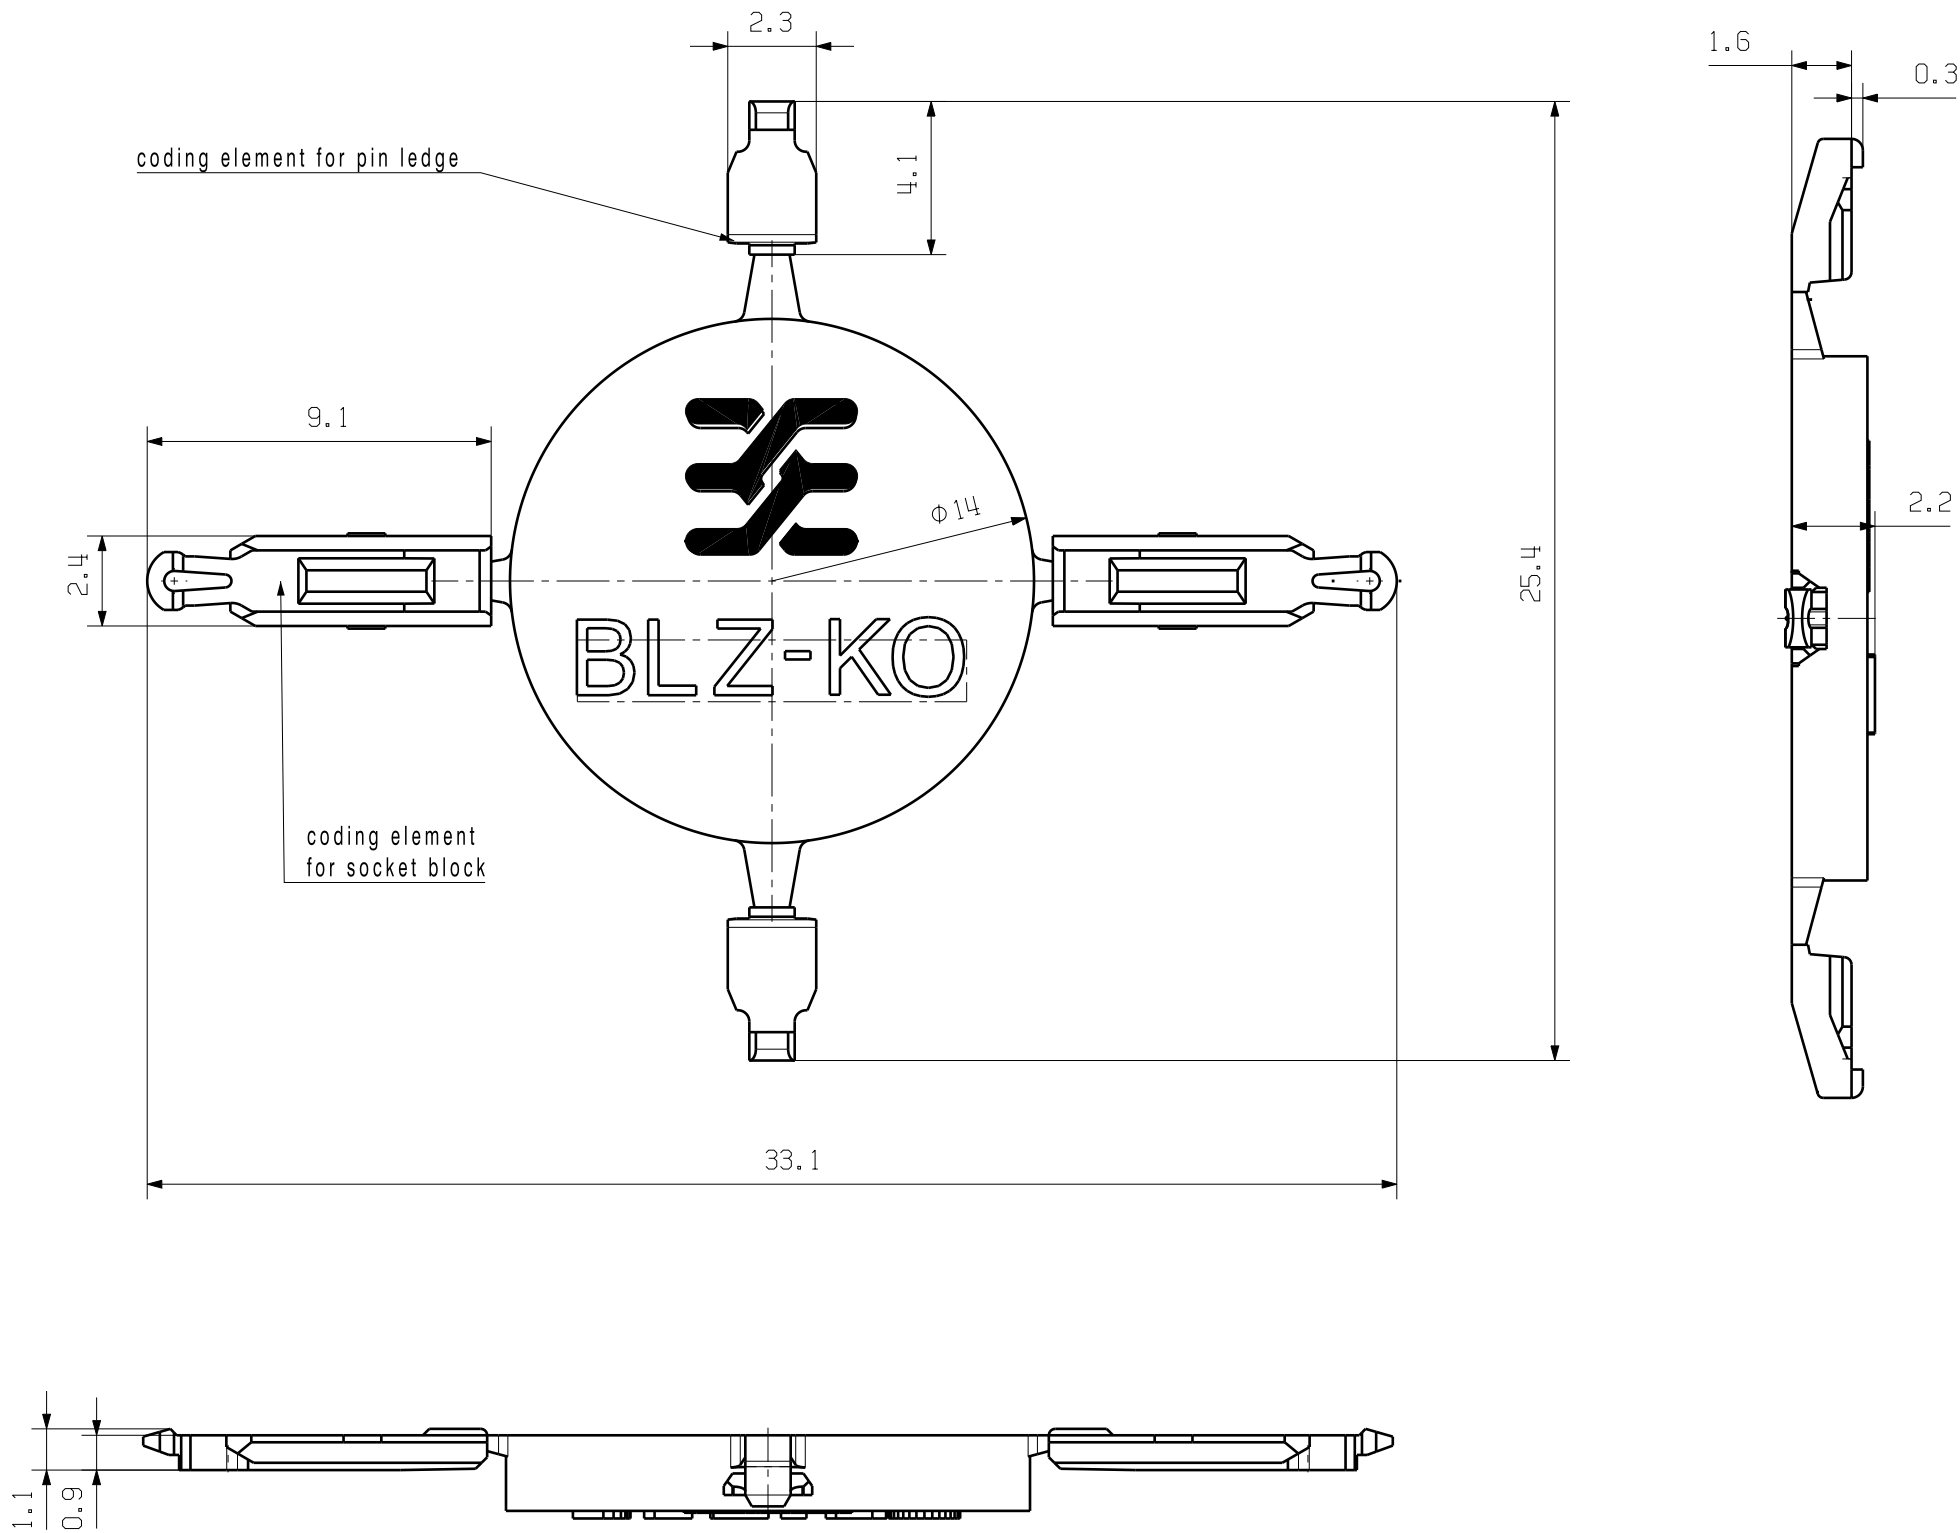

		1545710000	black	BLZ-KO SW	socket block / pin header black	
		1573010000	orange	BLZ-KO OR	socket block / pin header orange	
		order number	colour	title	usage	
General tolerance: DIN ISO 2768-mK						Cat.no.: .
		92434/0 10.04.17 HERTEL_S	16			C 62110 
		Modification				
					Date	Name
Drawn	21.05.2015			HERTEL_S	KO BLZ../SL .. KODIERELEMENT ACCESSORY	
Responsible				HERTEL_S		
Scale: 10:1	Checked			18.04.2017		
Supersedes: .		Approved	LANG_T	Product file: BLZ 5.08		7147