


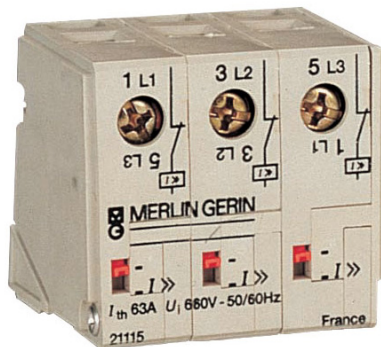

Main

Circuit breaker application	Control circuit
Range of product	P25M
Device short name	Limiter block
Poles description	3P
[In] rated current	63 A
Breaking capacity	100 kA at 415 V AC 50/60 Hz

Complementary

Mounting mode	Fixed downside Fixed upside
Mounting support	Plug-in
9 mm pitches	5
Connections - terminals	Tunnel type terminals 25 mm ² flexible

Environment

Standards	IEC 947-2 IEC 947-4
Product certifications	CEBEC DEMKO NEMKO SEMKO
RoHS EUR conformity date	0640
RoHS EUR status	Compliant

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.