KCMA-18-200-1A-3VA-3

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Product image, Similar to illustration

The cable-type current transformer is primarily used in retrofitting
to avoid splitting the primary conductors.

- Thanks to its dimensions
  and ease of handling, the cable-type current transformer is particularly suitable for use in places that are difficult to access or in case of limited space
- In combination with the securing clamps, the "click" system even enables
  "one-handed" installation.

General ordering data

Version	Primary current: 200 A, Secondary current max.: 1 A, Load: 3 VA, Tolerance class: 3, detachable current transformer
Order No.	2420760000
Type	KCMA-18-200-1A-3VA-3
GTIN (EAN)	4050118428933
Qty.	1 pc(s).

KCMA-18-200-1A-3VA-3

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	68 mm	Depth (inches)	2.677 inch
Height	64.5 mm	Height (inches)	2.539 inch
Net weight	1 g	Width	41.6 mm
Width (inches)	1.638 inch		

Temperatures

Storage temperature	-25 °C...70 °C	Operating temperature	-5 °C...50 °C

Dimensions of live conductors

Installation location	Indoor use	Round conductor	18.5 mm
Type of conductor	Insulated conductor only		

Technical data

Protection degree	None, IP20

Insulation coordination

Standard	IEC 61869-1: 2007, IEC 61869-2: 2012	Tolerance class	3

Classifications

ETIM 6.0	EC002048	ETIM 7.0	EC002048
ECLASS 9.0	27-21-09-02	ECLASS 9.1	27-21-09-02
ECLASS 10.0	27-21-09-02	ECLASS 11.0	27-21-09-02

Approvals

ROHS	Conform

Downloads

User Documentation	Instruction sheet German

KCMA-18-200-1A-3VA-3

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com
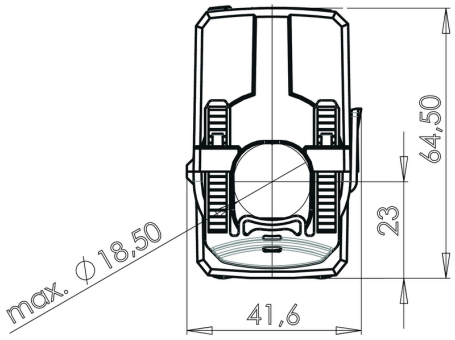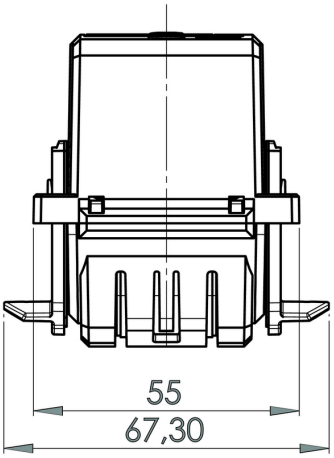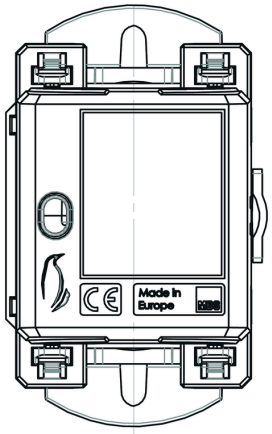
Drawings