


**HS-HF 19.5-38.1/50 MM W****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

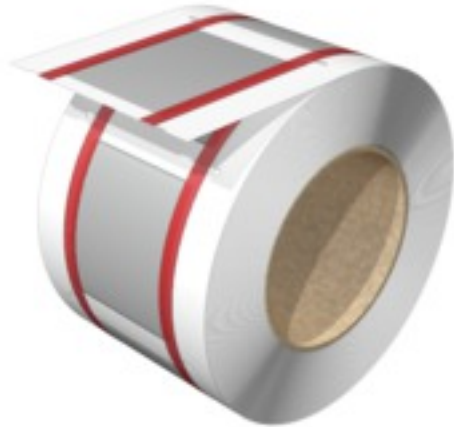

The heat-shrinkable sleeve is printable on 2 sides and can be used for marking and insulating cables and wires. The flexible, heat-shrink material enables a firm, perfect fit around the conductor and therefore saves space.

**General ordering data**

Version	Conductor and cable markers, 19.5 - 38.1 mm, {Reference (AttributeDefinition) not found: pAttr74196859207437}, white
Order No.	<a href="#">2437970000</a>
Type	HS-HF 19.5-38.1/50 MM W
GTIN (EAN)	4050118460612
Qty.	100 pc(s).
compatible printer	<a href="#">2599430000</a> <a href="#">2599440000</a> <a href="#">1140490000</a>

Creation date March 26, 2021 11:40:40 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

## HS-HF 19.5-38.1/50 MM W

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Dimensions and weights

Depth	0.77 mm	Depth (inches)	0.03 inch
Height	50.8 mm	Height (inches)	2 inch
Net weight	3.8 g	Width	60.5 mm
Width (inches)	2.382 inch		

### Temperatures

Operating temperature range	-55...105 °C
-----------------------------	--------------

### General data

Colour	white	Halogen	No
Material	Polyolefine	Operating temperature range	-55...105 °C
Operating temperature range, max.	105 °C	Operating temperature range, min.	-55 °C
Width	60.5 mm		

### Conductor and cable markers

Conductor O.D.	19.5 - 38.1 mm	Conductor O.D., max.	38.1 mm
Conductor O.D., min.	19.5 mm	Conductor cross-section, max.	240 mm <sup>2</sup>
Conductor cross-section, min.	70 mm <sup>2</sup>	Cross-section for connected wire	70 - 240 mm <sup>2</sup>
Halogen	No	Rate of shrinkage	2:1
Recommended shrinking temperature	90 °C		

### Classifications

ETIM 6.0	EC001530	ETIM 7.0	EC001530
ECLASS 9.0	27-40-04-01	ECLASS 9.1	27-40-04-01
ECLASS 10.0	27-40-04-01	ECLASS 11.0	27-28-11-02

### Approvals

ROHS	Conform
------	---------

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">NFX 70-100-1 2006 + NF X 70-100-2 2006</a> <a href="#">BS EN 45545-2 2013+A1 2015</a> <a href="#">BS EN ISO 4589-2 1999</a>
Engineering Data	<a href="#">EPLAN</a>

**Data sheet**

**HS-HF 19.5-38.1/50 MM W**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

