

ACT20P-BRIDGE-P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Similar to illustration****ACT20P: The flexible solution**

- Precise and highly functional signal converters
- Release levers simplify handling

General ordering data

Version	Measuring bridge converter, Input : Resistance measuring bridge, Output : 0(4)-20 mA, 0-10 V
Order No.	2456820000
Type	ACT20P-BRIDGE-P
GTIN (EAN)	4050118471762
Qty.	1 pc(s).

ACT20P-BRIDGE-P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	113.6 mm	Depth (inches)	4.472 inch
Height	127.1 mm	Height (inches)	5.004 inch
Net weight	157 g	Width	22.5 mm
Width (inches)	0.886 inch		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...70 °C
Humidity	10...90 %, no condensation		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input

Bridge sensitivity	1.0 mV / V to 5.0 mV / V	Bridge supply voltage	5 V or 10 V
Input measurement range	± 10 mV / ± 20 mV / ± 30 mV / ± 50 mV (adjustable)	Number of inputs	1
Sensor	Resistance measuring bridge, Total resistance of all parallel resistance measuring bridges: min. 87Ω	Sensor supply	120 mA @ 10 V (= 4 x 350 Ω bridge resistors)

Output

Load impedance current	≤ 600 Ω	Output current	0...22 mA (adjustable)
Output voltage, note	0...11 V (adjustable)	Type	Voltage and current output (configurable)
load impedance voltage	600 Ω		

Output (analogue)

Type (analogue output)	Voltage and current output (configurable)
------------------------	---

General data

Configuration	DIP switch and button	Linearity	Typically ± 0.05 % of signal range
Long-term drift	0.1 % / 10.000 h	Power consumption	3 W @ 24 V DC
Rail	TS 35	Repeat accuracy	± 0.05 % of final value
Step response time	< 400 ms (10...90 %)	Temperature coefficient	typ. 0.005 % / °C
Type of connection	PUSH IN	Voltage supply	10...60 V DC

Insulation coordination

EMC standards	EN 61326	Insulation voltage	5.7 kV (input / output, input / supply)
Pollution severity	2	Rated voltage	300 V _{eff}
Surge voltage category	III		

ACT20P-BRIDGE-P

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Connection data

Type of connection	PUSH IN	Wire connection cross section AWG, min.	AWG 26
Wire connection cross section AWG, max.	AWG 14	Wire cross-section, solid, min.	0.2 mm ²
Wire cross-section, solid, max.	2.5 mm ²	Wire connection cross section, finely stranded, min.	0.2 mm ²
Wire connection cross section, finely stranded, max.	2.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.2 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	2.5 mm ²		

Classifications

ETIM 6.0	EC002653	ETIM 7.0	EC002653
ECLASS 9.0	27-21-01-20	ECLASS 9.1	27-21-01-90
ECLASS 10.0	27-21-01-20	ECLASS 11.0	27-21-01-20

Important note

Product information	The ACT20P-BRIDGE-P bridge measuring transducer converts measuring bridge voltages into standard signals. Buttons are used for adjustment to the measuring bridge connected. The bridge measuring transducer can supply up to 4 parallel-connected measuring bridges each with 350 Ω. The device supports simple compensation of the tare weight with a separate input for an external button or an external PLC signal. The power supply is galvanically isolated from input and output (3-way isolation).T Features • 4-wire and 6-wire measurement • Supply of up to 4 parallel-connected measuring bridges each with 350 Ω • Input and output ranges can be adjusted via DIP switches • Tare compensation via external button or PLC signal • Front LED indicates operation status • 3-way galvanic isolation between input, output and power supply
---------------------	---

Approvals

Approvals



Approvals	CULUS;
ROHS	Conform

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	STEP
Software	DIP switch configuration tool
User Documentation	Instruction sheet


ACT20P-BRIDGE-P

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Electric symbol

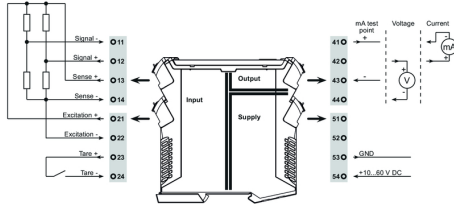


DIP switch setting



DIP switch								
Excitation	1	2	3	4	5	6	7	8
10 V	■							
5 V								
Output	1	2	3	4	5	6	7	8
mA	■							
V								
Input span	1	2	3	4	5	6	7	8
10 mV			■					
20 mV				■				
30 mV					■			
50 mV						■		
Measuring method	1	2	3	4	5	6	7	8
4-wire							■	■
6-wire								

■ = ON

Dimensioned drawing, Similar to illustration

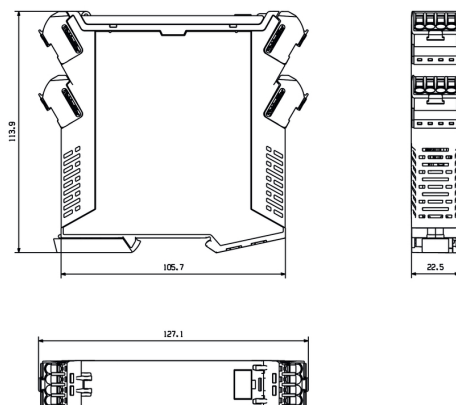

PUSH IN technology

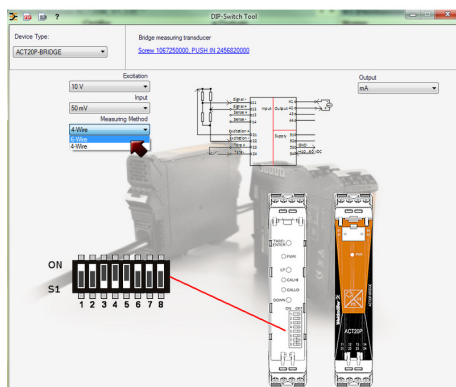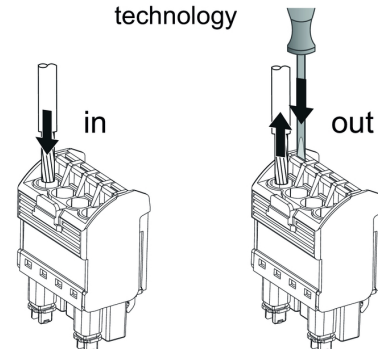

example for DIP switch setting (with ACT20 tool)