


ACT20P-UI-2RCO-DC-P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**General ordering data**

Version	Limit value monitoring, universal, Input: temperature, R, U, I, Relay output, 24 V DC power supply, 24 V (@ 4-20 mA loop)
Order No.	2456840000
Type	ACT20P-UI-2RCO-DC-P
GTIN (EAN)	4050118471779
Qty.	1 pc(s).

Creation date March 27, 2021 12:49:54 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

ACT20P-UI-2RCO-DC-P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	113.6 mm	Depth (inches)	4.472 inch
Height	127.1 mm	Height (inches)	5.004 inch
Net weight	150 g	Width	22.5 mm
Width (inches)	0.886 inch		

Temperatures

Storage temperature	-20 °C...70 °C	Operating temperature	-20 °C...70 °C
Humidity	10...90 %, no condensation		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input

Cable-length compensation	< ±0.002 Ω per cable resistance Ω	Influence of the sensor cable resistance	5 Ω @ RTD- Kabel
Input current	configurable, ± 25 mA DC, ±5 A DC	Input resistance, current	40 Ω
Input resistance, voltage	2 MΩ, > 10 MΩ	Input voltage	configurable, ±150 mV DC, ± 600mV DC, ±30 V DC, ±300 V DC
Number of inputs	1	Potentiometer	1.2...500 kΩ
Resistance	0...10 kΩ, 0...12 kΩ, 0...15 kΩ	Sensor	Thermocouples: B, E, J, K, L, N, R, S, T, U, RTD: PT100, PT200, PT1000, Ni120, Cu10, 2-/3-/4-wire
Sensor supply	0.1 mA / 0.05 mA (depending on measuring range) @ RTD cable	Supply voltage (input)	24 V (@ 4-20 mA loop)
Temperature input range	B: +100...+1820 °C, E: -270...+1000 °C, J: (-210...+1200 °C), K: -270...+1372 °C, L: +100...+900 °C, N: (-180...+1300 °C), R: -50...+1768 °C, S: -50...+1768 °C, T: -270...+400 °C, U: -200...+600 °C		

Output (digital)

Alarm function	configurable, Top and bottom limit values, window range, Alarm delay: 0...99 s, Hysteresis adjustable, auto / manual reset	Max. switching voltage, AC	240 V
Max. switching voltage, DC	110 V	Number of digital outputs	2
Rated switching current	200mA @ 110Vdc, 6A @ 24Vdc / 240Vac	Type	2 CO contacts, normal / inverse adjustment, Switching frequency 20 Hz

ACT20P-UI-2RCO-DC-P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**General data**

Accuracy	< 0.1 % of measuring range	Cold-junction compensation error	±2.0°C @ -20° C - 70°C
Configuration	With FDT/DTM software, or via 7-segment display, push-buttons and rotary encoder on the device itself	Galvanic isolation	4-way isolator; Input to supply / Alarm 1 / Alarm 2
Power consumption	≤ 3.5 W	Rail	TS 35
Repeat accuracy	± 0.05 % of measuring range final value	Step response time	450 ms
Temperature coefficient	< 0.02 °C of measuring range / °C	Type of connection	PUSH IN
Voltage supply	9...60 V DC		

Insulation coordination

EMC standards	EN 61326-1	Galvanic isolation	4-way isolator; Input to supply / Alarm 1 / Alarm 2
Impulse withstand voltage	4 kV (1.2/50 µs)	Insulation voltage	4 kV (input / output)
Pollution severity	2	Rated voltage	300 V _{eff}
Surge voltage category	III	Test voltage	300 V

Connection data

Type of connection	PUSH IN	Wire connection cross section AWG, min.	AWG 26
Wire connection cross section AWG, max.	AWG 14	Wire cross-section, solid, min.	0.2 mm ²
Wire cross-section, solid, max.	2.5 mm ²	Wire connection cross section, finely stranded, min.	0.2 mm ²
Wire connection cross section, finely stranded, max.	2.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.2 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	2.5 mm ²		

Classifications

ETIM 6.0	EC002654	ETIM 7.0	EC002654
ECLASS 9.0	27-21-01-22	ECLASS 9.1	27-21-01-22
ECLASS 10.0	27-21-01-22	ECLASS 11.0	27-21-01-22

Important note

Product information	The devices of the ACT20P-UI-2RCO-XX-x family record current, voltage, potentiometer and temperature sensor signals (mA, A, mV, V, potentiometer, RTD and TC). They have two independent relay outputs which emit an alarm when levels exceed or fall below pre-set limits. Properties • Configuration and diagnosis with the FDT/DTM software "WI-Manager". • Manual configuration on the device is performed via the LED display by means of operating buttons and rotary encoders. • The dual-channel trip amplifier enables various alarm functions: window alarm, alarm delay, wire break detection, hysteresis and upper / lower limit alarm. • The active or passive signal inputs for RTD, TC, potentiometer, voltage and current are fully galvanically isolated. • Remote diagnosis: reporting of errors (e.g. cable breaks) via status relay. • Operational status and relay status indicated by front panel LEDs. • Galvanic 4-way isolation between input, output and supply.
---------------------	--

Creation date March 27, 2021 12:49:54 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

ACT20P-UI-2RCO-DC-P

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals



Approvals

CULUS;

ROHS

Conform

Downloads

Approval/Certificate/Document of
Conformity

[Declaration of Conformity](#)

Engineering Data

[STEP](#)

Software

[WI-Manager, DTM-Library for online installation V.1.2.2](#)

User Documentation

[Instruction sheet](#)

ACT20P-UI-2RCO-DC-P

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings


Dimensioned drawing, Similar to illustration



Removable terminals

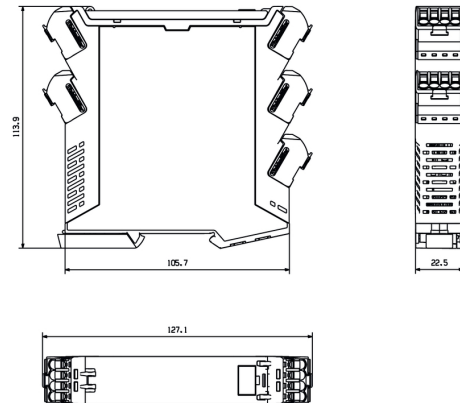


Similar to illustration

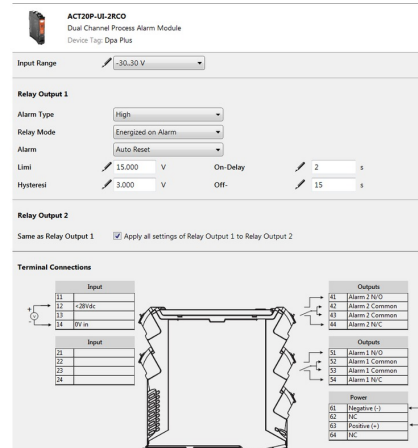

screenshot of configuration with FDT2 / DTM software

PUSH IN technology

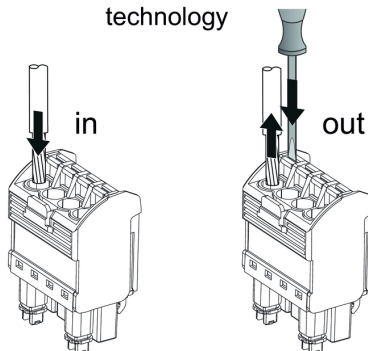

ACT20P-UI-2RCO-DC-P
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com
Drawings
