

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany

www.weidmueller.com

Product image

















The innovative quick connector - simple, safe and economical:

PCB terminals with spring connection and direct PUSH IN technology. A milestone in connection technology. Amazingly simple and simply amazing in practice:

- Connect and easily detach solid wires or wires with wire-end ferrules without using tools
- Processed automatically in the reflow or vapour phase
- · Potentials and clamping points marked clearly by coloured push buttons

World-class design-in and processing phases, and suitable for a vast range of applications.

PCB terminal for fully automatic assembly using reflow soldering (SMD), with PUSH IN wire connections. Conductor insertion and slider operation from the same direction (TOP).

- Solid & flexible conductors with wire-end ferrules need only to be inserted and they are ready.
- · When connecting stranded wires without wireend ferrules the actuating element is used to open the terminal point
- Intuitive handling since the wire-entry area and handling area are clearly separated.
- Packaged in tape-on-reel
- Conductor outlet direction 180°







General ordering data

Version	Printed circuit board terminals, 3.50 mm, Number		
	of poles: 3, 180°, black, PUSH IN, Clamping range,		
	max. : 1.5 mm², Tape		
Order No.	<u>2457340000</u>		
Туре	LSF-SMD 3.50/03/180 SN BK RL PRT		
GTIN (EAN)	4050118472080		
Qty.	180 pc(s).		
Product data	IEC: 320 V / 17.5 A / 0.2 - 1.5 mm ²		
	UL: 300 V / 12 A / AWG 24 - AWG 16		
Packaging	Tape		



Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	10.5 mm	Depth (inches)	0.413 inch
Height	16.3 mm	Height (inches)	0.642 inch
Height of lowest version	16.3 mm	Net weight	2.618 g
Width	11.2 mm	Width (inches)	0.441 inch

Temperatures

Continuous operating temp., max. 120 °C

System parameters

Product family	OMNIMATE Signal - series	Wire connection method	DUCLIN
	LSF		PUSH IN
Mounting onto the PCB	SMD solder connection	Conductor outlet direction	180°
Pitch in mm (P)	3.5 mm	Pitch in inches (P)	0.138 inch
Number of poles	3	Pin series quantity	1
Fitted by customer	No	Coplanarity:	100 μm
Number of solder pins per pole	2	Stripping length	8 mm
L1 in mm		Touch-safe protection acc. to DIN VDE	
	7 mm	0470	IP 20
Touch-safe protection acc. to DIN VD	E	Volume resistance	
57 106	Safe from finger touch		$1.60~\text{m}\Omega$

Material data

Insulating material	LCP GF	Colour	black
Colour chart (similar)	RAL 9011	Insulating material group	Illa
Comparative Tracking Index (CTI)	≥ 175	Moisture Level (MSL)	1
UL 94 flammability rating	V-0	Contact material	Copper alloy
Layer structure of solder connection	46 µm Sn matt	Storage temperature, min.	-40 °C
Storage temperature, max.	70 °C	Operating temperature, min.	-50 °C
Operating temperature, max.	120 °C	Temperature range, installation, min.	-30 °C
Temperature range, installation, max.	120 °C		

Conductors suitable for connection

Clamping range, min.	0.13 mm ²
Clamping range, max.	1.5 mm ²
Wire connection cross section AWG, min.	AWG 28
Wire connection cross section AWG, max.	AWG 14
Solid, min. H05(07) V-U	0.2 mm ²
Solid, max. H05(07) V-U	1.5 mm ²
Flexible, min. H05(07) V-K	0.2 mm ²
Flexible, max. H05(07) V-K	1.5 mm ²
w. plastic collar ferrule, DIN 46228 pt 4 min.	4, 0.25 mm²
w. plastic collar ferrule, DIN 46228 pt 4 max.	4, 0.75 mm²
w. wire end ferrule, DIN 46228 pt 1, min.	0.25 mm ²
w. wire end ferrule, DIN 46228 pt 1, max.	1.5 mm ²



Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany

www.weidmueller.com

Technical data

Clampable conductor	Cross-section for conductor connection		Туре	fine-wired
			nominal	0.25 mm ²
	wire end ferrule		Stripping length	nominal 10 mm
			Recommended wire end ferrule	- H0,25/12 HBL
	Cross-section for conductor connection		Туре	fine-wired
			nominal	0.34 mm ²
	wire end ferrule		Stripping length	nominal 10 mm
			Recommended wire end ferrule	- <u>H0,34/12 TK</u>
	Cross-section for conductor connection		Туре	fine-wired
			nominal	0.5 mm ²
	wire end ferrule		Stripping length	nominal 10 mm
			Recommended wire end ferrule	- H0,5/14 OR
	Cross-section for conducto	r connection	Туре	fine-wired
			nominal	0.75 mm ²
	Re		Stripping length	nominal 10 mm
			Recommended wire end ferrule	- <u>H0,75/14T HBL</u>
Rated data acc. to IEC				
tested acc. to standard	IEC 60664-1, IEC 61984	Rated current, n (Tu=20°C)	nin. number of poles	17.5 A
Rated current, max. number of poles (Tu=20°C)	16 A	Rated current, min. number of poles (Tu=40°C) 17.5 A		17.5 A
Rated current, max. number of poles (Tu=40°C)	14 A	Rated voltage for surge voltage class / pollution degree II/2 320 V		320 V
Rated voltage for surge voltage class / pollution degree III/2	160 V	Rated voltage for surge voltage class / pollution degree III/3 160 V		160 V
Rated impulse voltage for surge voltage class/ pollution degree II/2	2.5 kV	Rated impulse voltage for surge voltage class/ pollution degree III/2 2.5 kV		2.5 kV
Rated impulse voltage for surge voltage class/ contamination degree III/3	2.5 kV	Short-time withstand current resistance 3 x 1s with 80 A		3 x 1s with 80 A
Rated data acc. to CSA				
Dotad valtage (Has group D. / CCA)	200 V	Dotad valta ::- //	las man D / CCA	200 V
Rated voltage (Use group B / CSA)	300 V		Jse group D / CSA)	300 V
Rated current (Use group B / CSA)	10 A	Rated current (Use group D / CSA) 10 A		
Wire cross-section, AWG, min.	AWG 28	Wire cross-section, AWG, max. A		AWG 14

Rated voltage (Use group D / UL 1059) 300 V

10 A

AWG 16

Rated current (Use group D / UL 1059)

Wire cross-section, AWG, max.

Rated data acc. to UL 1059

Rated current (Use group B / UL 1059)

Wire cross-section, AWG, min.

Rated voltage (Use group B / UL 1059) 300 V

12 A

AWG 24



Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany

www.weidmueller.com

Technical data

Packing

Packaging	Tape	VPE length	330 mm
VPE width	330 mm	VPE height	35 mm
Tape depth (T2)	17.6 mm	Tape width (W)	32 mm
Tape pocket depth (KO)	17.1 mm	Tape pocket height (A0)	11.2 mm
Tape pocket width (B0)	19.5 mm	Tape pocket separation (P1)	20 mm
Tape hole separation (E)	1.75 mm	Tape pocket separation (F)	14.2 mm
Tape reel diameter Ø (A)	330 mm	Surface resistance	$Rs = 10^9 - 10^{12} \Omega$
Width Pick & Place Pad (W _{PPP})	7.5 mm	Length Pick & Place Pad (L _{PPP})	8.5 mm
Diameter of the withdrawal surface	(Ø		
D _{max})	9 mm		

Classifications

ETIM 6.0	EC002643	ETIM 7.0	EC002643
ECLASS 9.0	27-44-04-01	ECLASS 9.1	27-44-04-01
ECLASS 10.0	27-44-04-01	ECLASS 11.0	27-46-01-01

Important note

Notes

IPC conformity	Conformity: The products are developed, manufactured and delivered according international recognized
	standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties
	in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.

- Additional push button colours on request
- Operating force of slider max. 40 N
- · Rated current related to rated cross-section & min. No. of poles.
- Wire end ferrule with plastic collar to DIN 46228/4
- Wire end ferrule without plastic collar to DIN 46228/1
- P on drawing = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
- Crimping shape "A" for wire end ferrules with PZ 6/5 crimping tool recommended.
- Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months

Approvals

Approvals



ROHS Conform

Downloads

Brochure/Catalogue Catalogues in PDF-format




Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany

www.weidmueller.com

Drawings

Dimensional drawing




Graph

LSF-SMD 3.5/../180


30 40 50 60 70 80

load current I [A] 12 10 = 2 pos. = 12 pos. = 0.5 mm² (H05V-K0.5 / EN 60947-7-1)

Graph

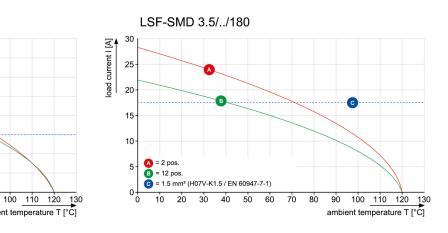


Product benefits



Stable solder connection

Product benefits



PUSH IN wire connection

ambient temperature T [°C]



Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany

www.weidmueller.com


Drawings

Product benefits




Packaged in tape-on-reel

Dimensional drawing



Dimensional drawing

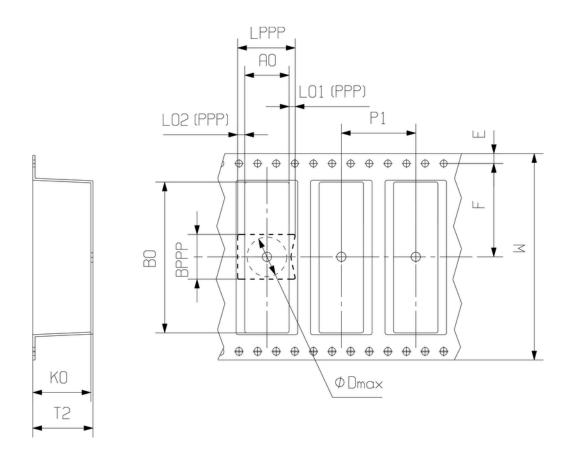

DIRECTION OF UNREELING



Recommended reflow soldering profile

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 16 D-32758 Detmold Germany

Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com



Reflow soldering profile

The perfect soldering profile for SMT Surface Mount Technology is one the most exiting question in SMT production. But there are more than one correct answer: The diagram of temperature-on-time is related to processing features of solder paste and to maximum load of components.

We have to consider the following parameters:

- · Time for pre heating
- Maximum temperature
- Time above melting point
- · Time for cooling
- · Maximum heating rate
- · Maximum cooling rate

We recommend a typical solder profile with associated process limits. With preheating components and board are prepared smoothly for the solder phase. Heating rate is typically $\leq +3$ K/s. In parallel the solder paste is ,activated'. The time above melting point of 217°C the paste gets liquid and components and boards begin to connect. The maximum temperature of 245°C to 254°C should stay between 10 and 40 seconds. In the cooling phase at \geq -6K/s solder is cured. Board and components cool down while avoiding cold cracks.