

**SLAD 04/90 3.2SN GN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

Similar to illustration

Dimensionally stable, angled, codable 2-tier male connector from the Unimate range of plugs with integral aid to prevent wrong connections. Available with open or closed sides. Fixing blocks can be attached to the closed version. The solder pin length of 3.2 mm has been optimised for wave soldering. Supplied in cardboard box.

**General ordering data**

|              |                                                                                                                                            |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Version      | PCB plug-in connector, male header, open side, THT solder connection, 5.08 mm, Number of poles: 4, 90°, Solder pin length (l): 3.2 mm, Box |
| Order No.    | <a href="#">2462830000</a>                                                                                                                 |
| Type         | SLAD 04/90 3.2SN GN                                                                                                                        |
| GTIN (EAN)   | 4050118477603                                                                                                                              |
| Qty.         | 50 pc(s).                                                                                                                                  |
| Product data | IEC: 400 V / 10 A<br>UL: 300 V / 10 A                                                                                                      |
| Packaging    | Box                                                                                                                                        |

Creation date April 15, 2021 9:44:06 PM CEST

## SLAD 04/90 3.2SN GN

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |       |
|------------|-------|
| Net weight | 3.8 g |
|------------|-------|

## System specifications

|                                 |                                          |                                                 |                                          |
|---------------------------------|------------------------------------------|-------------------------------------------------|------------------------------------------|
| Product family                  | OMNIMATE Signal - series<br>BLA/SLA 5.08 | Type of connection                              | Board connection                         |
| Mounting onto the PCB           | THT solder connection                    | Pitch in mm (P)                                 | 5.08 mm                                  |
| Pitch in inches (P)             | 0.2 inch                                 | Outgoing elbow                                  | 90°                                      |
| Number of poles                 | 4                                        | Number of solder pins per pole                  | 1                                        |
| Solder pin length (l)           | 3.2 mm                                   | Solder pin dimensions                           | d = 1.2 mm, Octagonal                    |
| Solder eyelet hole diameter (D) | 1.3 mm                                   | Solder eyelet hole diameter tolerance (D)+      | 0,1 mm                                   |
| L1 in mm                        | 5.08 mm                                  | L1 in inches                                    | 0.2 inch                                 |
| Pin series quantity             | 2                                        | Touch-safe protection acc. to DIN VDE<br>57 106 | Safe from back-of-hand<br>touch, plugged |
| Volume resistance               | 9.00 mΩ                                  | Can be coded                                    | Yes                                      |
| Pulling force/pole, max.        | 2 N                                      |                                                 |                                          |

## Material data

|                                       |        |                                       |        |
|---------------------------------------|--------|---------------------------------------|--------|
| Insulating material                   | PBT GF | Insulating material group             | IIIa   |
| Comparative Tracking Index (CTI)      | ≥ 200  | UL 94 flammability rating             | V-0    |
| Contact material                      | CuSn   | Storage temperature, min.             | -40 °C |
| Storage temperature, max.             | 70 °C  | Operating temperature, min.           | -50 °C |
| Operating temperature, max.           | 120 °C | Temperature range, installation, min. | -25 °C |
| Temperature range, installation, max. | 120 °C |                                       |        |

## Rated data acc. to IEC

|                                                                              |                        |                                                                          |                  |
|------------------------------------------------------------------------------|------------------------|--------------------------------------------------------------------------|------------------|
| tested acc. to standard                                                      | IEC 60664-1, IEC 61984 | Rated current, min. number of poles<br>(Tu=20°C)                         | 10 A             |
| Rated current, max. number of poles<br>(Tu=20°C)                             | 7 A                    | Rated current, min. number of poles<br>(Tu=40°C)                         | 8.5 A            |
| Rated current, max. number of poles<br>(Tu=40°C)                             | 6 A                    | Rated voltage for surge voltage class /<br>pollution degree II/2         | 400 V            |
| Rated voltage for surge voltage class /<br>pollution degree III/2            | 320 V                  | Rated voltage for surge voltage class /<br>pollution degree III/3        | 250 V            |
| Rated impulse voltage for surge voltage<br>class/ pollution degree II/2      | 4 kV                   | Rated impulse voltage for surge voltage<br>class/ pollution degree III/2 | 4 kV             |
| Rated impulse voltage for surge voltage<br>class/ contamination degree III/3 | 4 kV                   | Short-time withstand current resistance                                  | 3 x 1s with 70 A |

## Rated data acc. to CSA

|                                   |       |                                   |       |
|-----------------------------------|-------|-----------------------------------|-------|
| Rated voltage (Use group B / CSA) | 300 V | Rated voltage (Use group D / CSA) | 300 V |
| Rated current (Use group B / CSA) | 10 A  | Rated current (Use group D / CSA) | 7 A   |

## Rated data acc. to UL 1059

|                                       |       |                                       |       |
|---------------------------------------|-------|---------------------------------------|-------|
| Rated voltage (Use group B / UL 1059) | 300 V | Rated voltage (Use group D / UL 1059) | 300 V |
| Rated current (Use group B / UL 1059) | 10 A  | Rated current (Use group D / UL 1059) | 10 A  |

## Packing

|           |       |            |        |
|-----------|-------|------------|--------|
| Packaging | Box   | VPE length | 170 mm |
| VPE width | 95 mm | VPE height | 40 mm  |

**SLAD 04/90 3.2SN GN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002637    | ETIM 7.0    | EC002637    |
| ECLASS 9.0  | 27-44-04-02 | ECLASS 9.1  | 27-44-04-02 |
| ECLASS 10.0 | 27-44-04-02 | ECLASS 11.0 | 27-46-02-01 |

**Important note**

|                |                                                                                                                                                                                                                                                                                                                            |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request. |
| Notes          | <ul style="list-style-type: none"><li>• Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months</li></ul>                                                                                                                                                                   |

**Approvals**

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

**Downloads**

|                    |                                          |
|--------------------|------------------------------------------|
| Brochure/Catalogue | <a href="#">Catalogues in PDF-format</a> |
|--------------------|------------------------------------------|


## SLAD 04/90 3.2SN GN

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

# Drawings

## Dimensional drawing

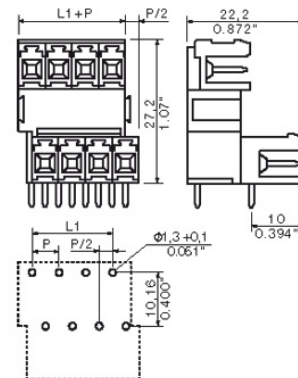

## Recommended wave soldering profiles

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

### Single Wave:



### Double Wave:



### Wave soldering profiles

Wired connection elements should be processed in accordance with the DIN EN 61760-1 standard. We have included two recommendations for practical wave soldering profiles, with which Weidmüller PCB terminals and connectors are qualified.

When choosing a suitable profile for your application, the following factors also need to be considered:

- PCB thickness
- Proportion of Cu in the layers
- Single/double-sided assembly
- Product range
- Heating and cooling rates

The single and double wave profiles each indicate the recommended operating range, including the maximum soldering temperature of 260°C. In practice, the maximum soldering temperature is quite often well below the above maximum profile.

We reserve the right to make technical changes.