


**PICOPAK-CI-CO-LP-P****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image, Similar to illustration****PicoPak: the robust one**

- Space-saving in the control cabinet thanks to the slim 6 mm width
- Passive isolator, loop-powered at the input and output
- Increased operating temperature range: -40°C ...+70°C
- Zero and Span adjustment possible

**General ordering data**

|            |                                                                                            |
|------------|--------------------------------------------------------------------------------------------|
| Version    | Signal converter/insulator, Output current loop powered, Input : 4-20 mA, Output : 4-20 mA |
| Order No.  | <a href="#">2501110000</a>                                                                 |
| Type       | PICOPAK-CI-CO-LP-P                                                                         |
| GTIN (EAN) | 4050118514704                                                                              |
| Qty.       | 1 pc(s).                                                                                   |

## PICOPAK-CI-CO-LP-P

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 55 mm   | Depth (inches)  | 2.165 inch |
| Height     | 79.4 mm | Height (inches) | 3.126 inch |
| Net weight | 47 g    | Weight          | 50 g       |
| Width      | 6.1 mm  | Width (inches)  | 0.24 inch  |

## Temperatures

|                     |                            |                       |                |
|---------------------|----------------------------|-----------------------|----------------|
| Storage temperature | -40 °C...85 °C             | Operating temperature | -40 °C...70 °C |
| Humidity            | 0...95 % (no condensation) |                       |                |

## Input

|               |                         |                             |        |
|---------------|-------------------------|-----------------------------|--------|
| Input current | 4...20 mA @ 6...35 V DC | Number of inputs            | 1      |
| Sensor        | Current source          | Voltage drop, current input | ≤3,5 V |

## Output

|                           |           |                        |                         |
|---------------------------|-----------|------------------------|-------------------------|
| Cut-off frequency (-3 dB) | ≥3,5 kHz  | Load impedance current | ≤ 600 Ω                 |
| Number of outputs         | 1         | Output current         | 4...20 mA, loop-powered |
| Supply voltage (output)   | 18...32 V |                        |                         |

## General data

|                         |                            |                         |                                                      |
|-------------------------|----------------------------|-------------------------|------------------------------------------------------|
| Accuracy                | < 0.1 % of measuring range | Configuration           | Potentiometer                                        |
| Galvanic isolation      | 2-way isolator             | Long-term drift         | ±0.05% of the measurement range / year               |
| Power consumption, max. | 0.85 W                     | Power consumption, typ. | 0.55 W                                               |
| Rail                    | TS 35                      | Standard                | EN 61010-1, EN 61326-1, UL 61010-1:2012, 3rd Edition |
| Step response time      | ≤ 5 ms                     | Temperature coefficient | ≤ 200 ppm/K                                          |
| Type of connection      | PUSH IN                    | Voltage supply          | Output loop powered                                  |

## Insulation coordination

|                        |                         |                    |                                                      |
|------------------------|-------------------------|--------------------|------------------------------------------------------|
| EMC standards          | EN 61326-1              | Galvanic isolation | 2-way isolator                                       |
| Insulation voltage     | 3.5 kV                  | Pollution severity | 2                                                    |
| Rated voltage          | 300 V AC <sub>rms</sub> | Standard           | EN 61010-1, EN 61326-1, UL 61010-1:2012, 3rd Edition |
| Surge voltage category | II                      |                    |                                                      |

## Connection data

|                                                      |                     |                                                      |                     |
|------------------------------------------------------|---------------------|------------------------------------------------------|---------------------|
| Type of connection                                   | PUSH IN             | Wire connection cross section, finely stranded, min. | 0.5 mm <sup>2</sup> |
| Wire connection cross section, finely stranded, max. | 1.5 mm <sup>2</sup> | Wire cross-section, finely stranded, min. (AWG)      | AWG 20              |
| Wire cross-section, finely stranded, max. (AWG)      | AWG 14              |                                                      |                     |

**PICOPAK-CI-CO-LP-P****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002653    | ETIM 7.0    | EC002653    |
| ECLASS 9.0  | 27-21-01-20 | ECLASS 9.1  | 27-21-01-90 |
| ECLASS 10.0 | 27-21-01-20 | ECLASS 11.0 | 27-21-01-20 |

**Important note**

## Product information

The passive Isolator PicoPak-CI-CO-LP separates stand- analogue current signals. An analogue input current signal is converted linear and galvanic isolated into an analogue out- put current signal. The power supply occurs through the input and output measuring circuit. The measuring range can be adjusted if necessary via the potentiometers (Zero and Span) installed on the front.

**Approvals**

## Approvals



## ROHS

Conform

## UL File Number Search

E141197

**Downloads**

## Approval/Certificate/Document of Conformity

[UL approval](#)  
[UL approval hazardous location](#)  
[IECEx approval](#)  
[ATEX approval](#)  
[Declaration of Conformity](#)

## Engineering Data

[STEP](#)

## User Documentation

[Instruction sheet](#)


## PICOPAK-CI-CO-LP-P

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany



[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

### Dimensional drawing

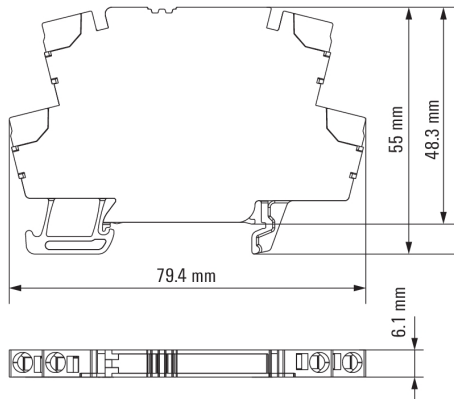

### Connection diagram

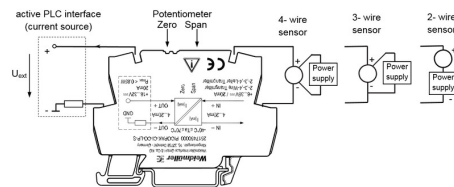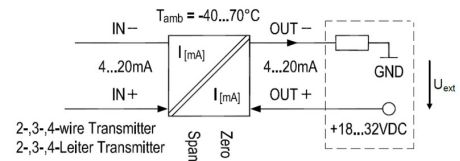

### Correct handling PUSH IN connection

