

IE-FCI-PWB-2USB-A-5V**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

FrontCom® Vario integrates multiple functions in only one single frame. The system is easy to install and you can select from a wide range of data, signal and power modules. In addition to being extremely compact, FrontCom® Vario offers a number of unique product features that will make your project planning and work activities secure, fast and future-proof. Furthermore, the FrontCom® Vario system has an attractive housing design that, by the way, offers highest impact-resistance and fully meets the requirements of IP 65 protection class.

General ordering data

Version	FrontCom, Insert Power large, USB charger
Order No.	2505070000
Type	IE-FCI-PWB-2USB-A-5V
GTIN (EAN)	4050118519167
Qty.	1 pc(s).

IE-FCI-PWB-2USB-A-5V**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight	52.352 g
------------	----------

Temperatures

Operating temperature	0 °C...45 °C
-----------------------	--------------

General data

Insert type	Insert Power large	Protection degree	IP20
-------------	--------------------	-------------------	------

USB charger

Degree of efficiency	81 %	Frequency range	50...60 Hz
Input current	≤ 300 mA	Input voltage	220...240 V AC
Input voltage, max.	240 V AC	Input voltage, min.	220 V
Output current	2.4 A	Output voltage	5 V
Output voltage	5 V DC	Output voltage type	DC
Power consumption in standby mode	max. 0.1 W	Protection class	II
Standards	EN 60950-1, EN 62684, EN 50558		

Clampable conductors

Conductor connection cross-section, extremely flexible with wire end ferrule	1.5 ... 2.5 mm ²
Conductor connection cross-section, extremely flexible with wire end ferrule	min. 1.5 mm ²
	max. 2.5 mm ²
Conductor connection cross-section, flexible with wire end ferrule	1.5 ... 2.5 mm ²
Conductor connection cross-section, flexible with wire end ferrule	min. 1.5 mm ²
	max. 2.5 mm ²
Conductor connection cross-section, rigid	1.5 ... 2.5 mm ²
Conductor connection cross-section, rigid	min. 1.5 mm ²
	max. 2.5 mm ²
Stripping length	6 mm
Type of connection	Screw connection

Electrical properties

Degree of efficiency	81 %
----------------------	------

Classifications

ETIM 6.0	EC001121	ETIM 7.0	EC001121
ECLASS 9.0	27-44-03-90	ECLASS 9.1	27-18-90-90
ECLASS 10.0	27-44-03-90	ECLASS 11.0	27-44-03-90

Approvals

ROHS	Conform
------	---------

IE-FCI-PWB-2USB-A-5V

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

Engineering Data

[STEP](#)

User Documentation

[Designation key / Type key](#)


IE-FCI-PWB-2USB-A-5V

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Dimensioned drawing

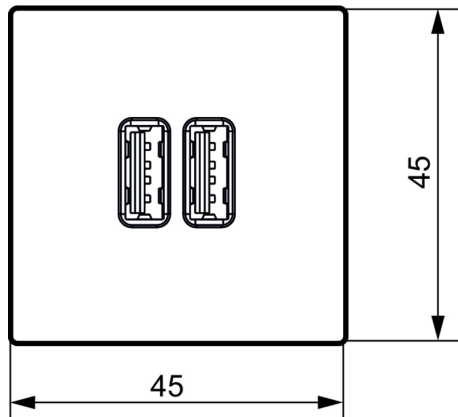

Dimensioned drawing

