


VPU PV I+II 3 R 1500**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

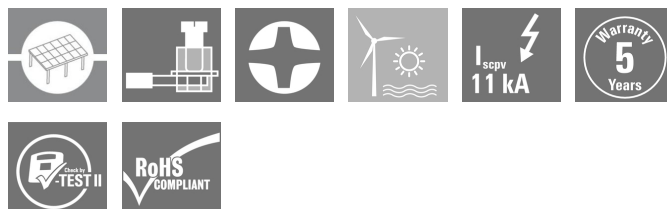Product image**Type II surge voltage arrester for use in photovoltaic applications**

- Pluggable arrester
- Suitable for protecting DC systems
- High energy absorption with short response time
- Tested in accordance with EN 50539-11
- Suitable for use in accordance with IEC 60364-7-712 / EN 50539-12
- Coded voltage level
- Installation in distribution board
- Thermal protection function

General ordering data

Version	Surge voltage arrester, Low voltage, 1500 V, with remote contact
Order No.	2530590000
Type	VPU PV I+II 3 R 1500
GTIN (EAN)	4050118540802
Qty.	1 pc(s).

VPU PV I+II 3 R 1500

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	86 mm	Depth (inches)	3.386 inch
Height	102 mm	Height (inches)	4.016 inch
Net weight	480 g	Width	54 mm
Width (inches)	2.126 inch		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...70 °C
Humidity	5 - 95% rel. humidity		

Rated data UL

Certificate No. (UR)	E354261	Ambient temperature (operational), max. 85 °C	
Rated Voltage U_N	1,500 V	SCCR	65 kA
I_n	20 kA	Category	SPD TYPE 1CA
Rated current (UL)	1,500 V	Ambient temperature (operational), min. -40 °C	
Certificate No. (cURus)	E354261	VPR (DC+/DC-)	4,000 V
VPR (DC-/G)	4,000 V	Voltage type	DC

Connection data, remote alert

Connection type	PUSH IN	Cross-section for connected wire, solid core, max.	1.5 mm ²
Cross-section for connected wire, solid core, min.	0.25 mm ²	Stripping length	12 mm

General data

Colour	black, orange	Design	Installation housing; 3TE, Insta IP 20
Optical function display	green = OK; red = arrester is defective - replace	Protection degree	IP20
Rail	TS 35	UL 94 flammability rating	V-0
Version	with remote contact		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Photovoltaic technical data

Discharge current I_n (8/20 μ s)	20 kA	Operating height in the grounded PV system	≤ 2000 m
Operating height in ungrounded PV system	< 4,000 m, see operating instructions	PV system voltage, max. U_{cpv}	1,500 V
Protection level U_p mode (+/-, -/PE, +/- PE)	$\leq 5,0$ kV	Requirements class	Type I/II
Short-circuit current I_{scpv}	11,000 A	Standards	EN 50539-11:2013+A1:2014, UL 1449 Ed.4
Standby power consumption P_C	< 0.2 W	Total discharge current I_{total} (8/20 μ s)	40 kA
Total discharge current I_{total} (10/350 μ s)	10 kA		

VPU PV I+II 3 R 1500

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Rated data IEC / EN

Leakage current at U_n	30 μ A	Number of poles	3
Rated voltage (DC)	1500 V	Response time	≤ 25 ns
SPD type	T1, T2	Signalling contact	250 V 1A 1CO, 125 V AC / 1 A, 48 V CC / 0.5 A, 24 V DC / 0.5 A
Standards	EN 50539-11:2013+A1:2014, UL 1449 Ed.4	Voltage type	DC

Connection data

Type of connection	Screw connection	Stripping length, rated connection	18 mm
Tightening torque, min.	2 Nm	Tightening torque, max.	4.5 Nm
Clamping range, rated connection	16 mm ²	Clamping range, min.	1.5 mm ²
Clamping range, max.	35 mm ²	Wire cross-section, solid, min.	1.5 mm ²
Wire cross-section, solid, max.	16 mm ²	Wire connection cross section, finely stranded, min.	1.5 mm ²
Wire connection cross section, finely stranded, max.	25 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), min.	1.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), max.	25 mm ²	Connection cross-section, stranded, min.	1.5 mm ²
Connection cross-section, stranded, max.	35 mm ²		

Ratings IECEx/ATEX/cUL

Certificate no. (cULus)	E354261
-------------------------	---------

Guarantee

Time interval	5 years
---------------	---------

Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ECLASS 9.0	27-13-08-05	ECLASS 9.1	27-13-08-05
ECLASS 10.0	27-13-08-05	ECLASS 11.0	27-13-08-05

Approvals

Approvals



ROHS	Conform
UL File Number Search	E354261

Downloads

Approval/Certificate/Document of Conformity	EAC VPU SERIES CE_VPU_PV
Engineering Data	STEP
Tender specification	Ausschreibungstext DE Tenderspecification EN
User Documentation	Manual

Creation date March 29, 2021 6:49:00 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.


VPU PV I+II 3 R 1500

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Electric symbol



Circuit diagram