

WIL-TS-M12**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

The WIL door switch is pre-assembled with an M12 cable and an access line. This allows for a simple Plug and Produce feature with our WIL LED lamp series.

General ordering data

Order No.	2537730000
Type	WIL-TS-M12
GTIN (EAN)	4050118549188
Qty.	1 pc(s).

WIL-TS-M12

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	40 mm	Depth (inches)	1.575 inch
Height	36.3 mm	Height (inches)	1.429 inch
Net weight	120 g	Width	102.5 mm
Width (inches)	4.035 inch		

Temperatures

Operating temperature	-20 - 60°C
-----------------------	------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Cable technical specifications

Cable Material	PUR	Sheathing colour	black
Cable length	0.5 m	Core cross-section	0.34 mm ²

Connection data

Coding	A	Connection thread	M12
Tightening torque	0.8 Nm	Wiring	PIN 4: + (black), PIN 3: - (blue)

Electric data

Rated voltage (text)	24 V DC	Rated current	1.5 A
----------------------	---------	---------------	-------

General technical data

Type of mounting	Screw mounting	Drill hole spacing	21.5 mm
Protection degree	IP67		

Classifications

ETIM 6.0	EC002955	ETIM 7.0	EC002955
ECLASS 11.0	27-11-06-92		

Approvals

Approvals



ROHS	Conform
------	---------


WIL-TS-M12

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings


Dimensioned drawing

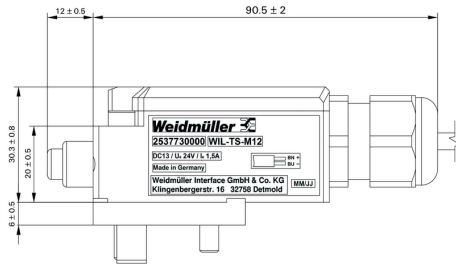

Dimensioned drawing

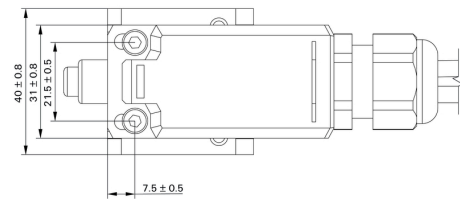

Dimensioned drawing

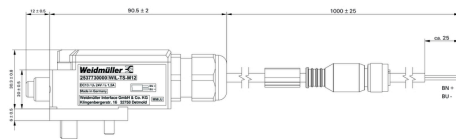

Dimensioned drawing

