

ITS 24-240VUC M7C PU10**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Similar to illustration

Compact multi-functional timing relay for easy control signal adjustment

With IT-TIMER, Weidmüller's range includes a highly efficient timing relay with multi-voltage input that combines a range of functions with a compact size. It is particularly easy to configure the timer functions thanks to the flat front cover, the easy-to-read LED status indicator and operation with standard tools. IT-TIMER meets the requirements of IEC 618121. It is designed for an operating voltage range from 24 V DC to 48 V DC or 24 V AC to 240 V AC and can therefore be used in a wide variety of applications.

- High level of functionality in a compact size
- Timing functions that are easy to configure using standard tools
- Can be used internationally thanks to compliance with EN 618121
- Seven timing functions for a wide range of applications make the IT-TIMER a smart solution for your application

General ordering data

Version	IT TIMER, Multifunction timing relay, with separate control input, Number of contacts: 1, CO contact, AgNi, Continuous current: 5 A, Screw connection
Order No.	2545120000
Type	ITS 24-240VUC M7C PU10
GTIN (EAN)	4050118555066
Qty.	10 pc(s).

ITS 24-240VUC M7C PU10

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	57.9 mm	Depth (inches)	2.28 inch
Height	98 mm	Height (inches)	3.858 inch
Net weight	49.6 g	Width	17.5 mm
Width (inches)	0.689 inch		

Temperatures

Storage temperature	-40 °C...70 °C	Operating temperature	-25 °C...50 °C
Humidity	25 - 75%, no condensation		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Control side

Basic accuracy	< 1.5 % (of scale-end value)	Max. reset time after voltage interruption	100 ms
Min. pulse duration	50 ms	Power rating	8 VA @ 230 V AC, 0.4 W at 24 V DC
Rated control voltage	24...48 V DC - 15 % / + 10 % / 24...240 V AC - 15 % / + 10 %	Repeat accuracy	< 0.5 % or ±5 ms
Setting tolerance	5 %	Status indicator	LED green (U/t): flashes when time runs, lights permanently with supply voltage applied, LED yellow (R): relay closed
Time ranges	0.05 s - 1 s, 0.5 s - 10 s, 3 s - 60 s, 0.5 min - 10 min, 3 min - 1 h, 0.5 h - 10 h		

Load side

AC switching capacity (resistive), max.	1250 VA	Continuous current	5 A
DC switching capacity (resistive), max.	90 W	Max. switching voltage, AC	250 V
Max. switching voltage, DC	30 V	Min. switching power	10 mA @ 12 V, 100 mA @ 5 V
Rated switching voltage	250 V AC		

Contact data

Contact type	1 CO contact (AgNi)	Mechanical service life	1 x 10 ⁶ switching cycles
--------------	---------------------	-------------------------	--------------------------------------

General data

Version	with separate control input	Rail	TS 35
Test button	No	Mechanical switch position indicator	No
Resistance to vibration EN 61812-1	10 Hz...60 Hz: 0.15 mm, 60 Hz...150 Hz: 2 g		

ITS 24-240VUC M7C PU10

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Insulation coordination

Creepage and clearance distance input – output	≥ 1.5 mm	Dielectric strength, Input/Output	1.6 kV
Impulse withstand voltage	2.5 kV	Pollution severity	2
Protection degree	IP20	Rated voltage	300 V
Surge voltage category	II		

Connection data

Wire connection method	Screw connection	Stripping length, rated connection	7 mm
Tightening torque, max.	0.5 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.25 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 23	Wire connection cross section AWG, max.	AWG 14
Wire cross-section, solid, min.	0.25 mm ²	Wire cross-section, solid, max.	2.5 mm ²
Wire connection cross section, finely stranded, min.	0.25 mm ²	Wire connection cross section, finely stranded, max.	2.5 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.25 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	2.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.25 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	2.5 mm ²
Blade size	size PH1		

Classifications

ETIM 6.0	EC001439	ETIM 7.0	EC001439
ECLASS 9.0	27-37-16-05	ECLASS 9.1	27-37-16-05
ECLASS 10.0	27-37-16-05	ECLASS 11.0	27-37-16-05

Approvals

Approvals



ROHS

Conform




Downloads

Approval/Certificate/Document of Conformity	EU Konformitätserklärung / EU Declaration of Conformity
Engineering Data	STEP
Engineering Data	EPLAN
User Documentation	Beipackzettel / Package Insert – multilingual Beschreibung der Zeitfunktionen - Deutsch Declaration of timing functions - English

ITS 24-240VUC M7C PU10

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

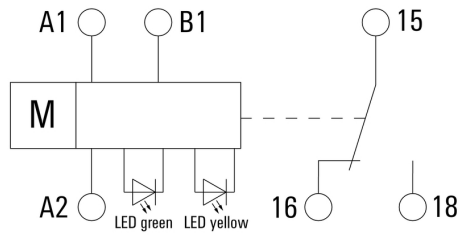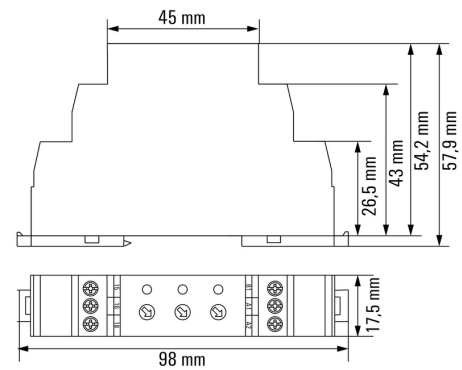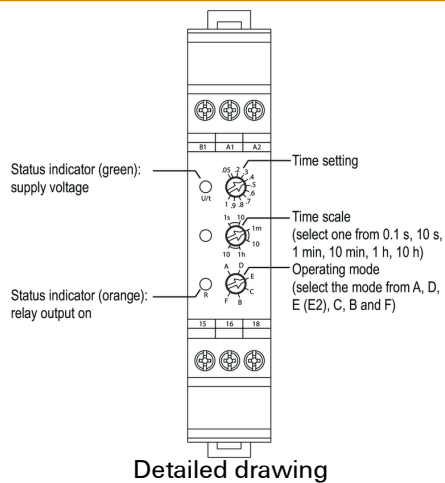www.weidmueller.com

Drawings
Wiring diagram

Dimensional drawing

Miscellaneous


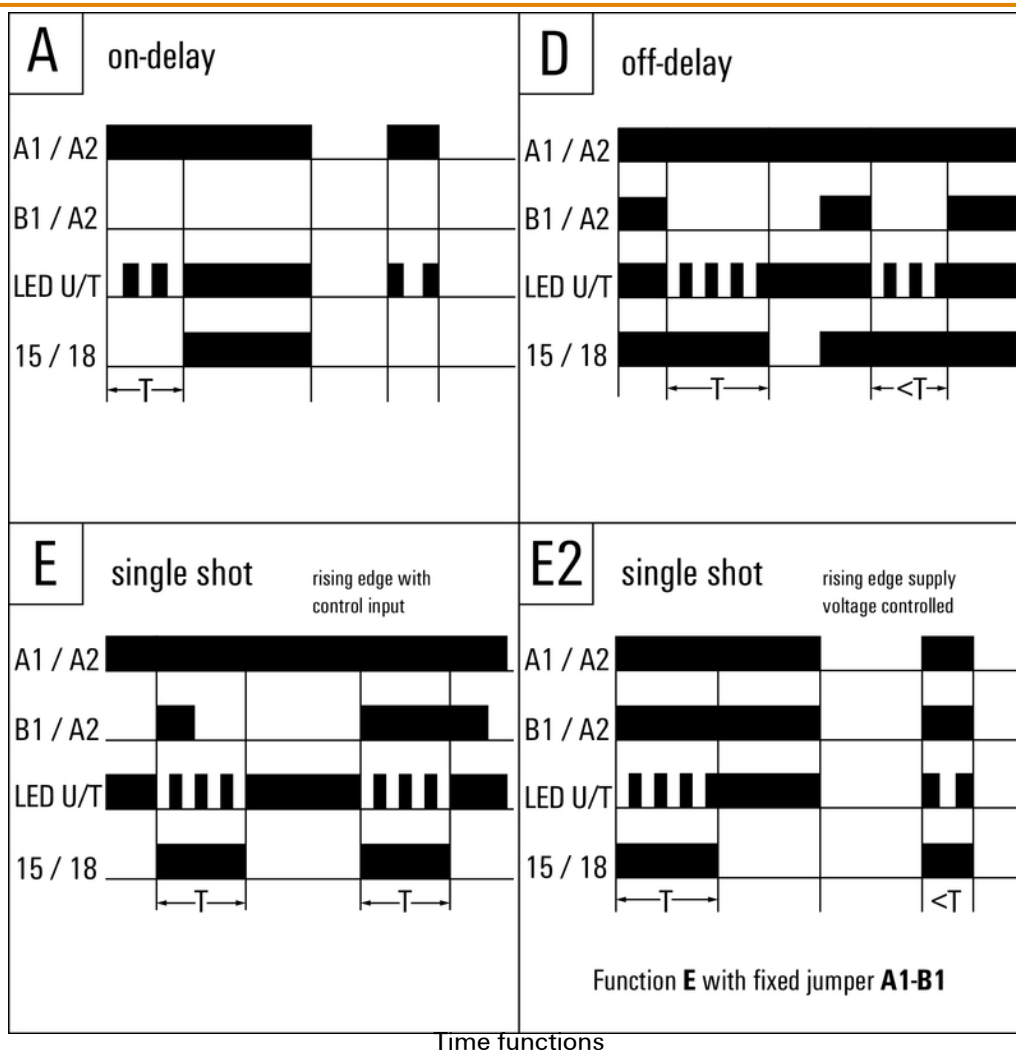
Detailed drawing

ITS 24-240VUC M7C PU10
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com
Drawings
Graph


ITS 24-240VUC M7C PU10

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

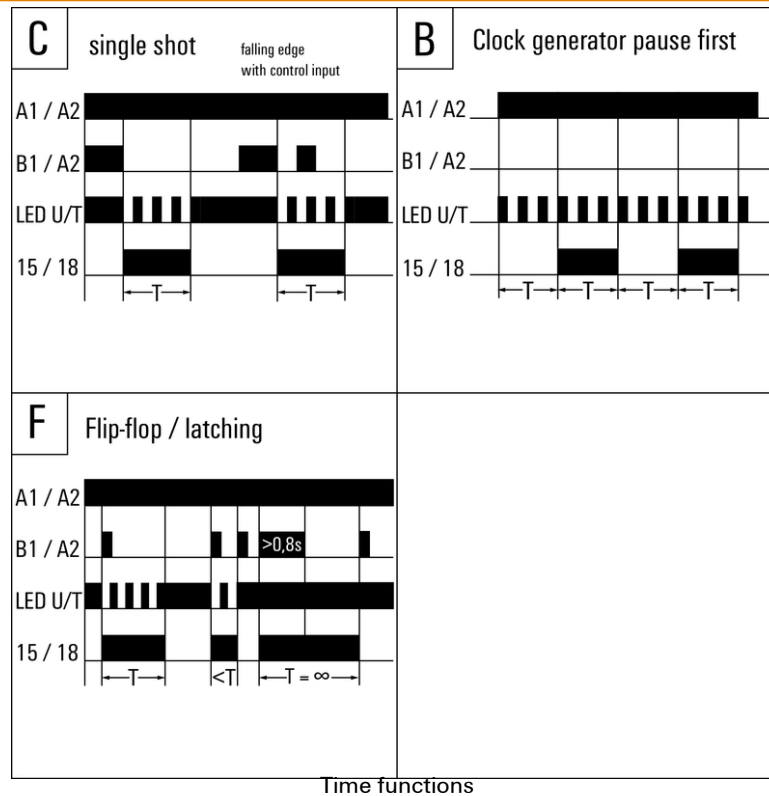
D-32758 Detmold

Germany


www.weidmueller.com

Drawings

Graph



Type codes

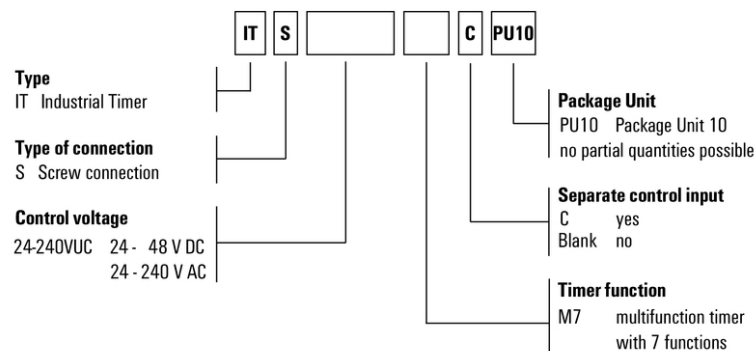

This product is the same as order no. **2496190000 - ITS 24-240VUC 1C0 M7C (package unit 1 piece)** but in a package unit of 10 pieces and a minimum order quantity of 500 pieces.

Miscellaneous

Creation date March 29, 2021 7:08:54 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.