

RJ45C5 T1D 3.3E4N TY**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Ассортимент продукции включает следующие модели:

- 90°, лежащая (горизонтальная) и 180°, стоящая (вертикальная)
- Защелка верх / защелка вниз;
- Технология пайки THT или THR
- Широкий ассортимент различных видов конструкции, также со встроенными светодиодами и печатными площадками для экранирования
- Категория эксплуатационных характеристик от кат. 3 до кат. 6
- Упаковка – лоток (TY) или рулон (лента на катушке, RL)
- Совместимость с модульным разъемом RJ45 в соответствии со стандартами ANSI/TIA-1096-A и IEC 60603
- Диэлектрическая прочность ≥ 1500 В пер. тока, среднеквадратичное значение (2250 В пер. тока, амплитудное значение) в соответствии со стандартом IEEE 802.3
- Диэлектрическая прочность ≥ 1500 В перем. тока (амплитудное значение) или ≥ 1500 В пост. тока в соответствии со стандартом с IEC 60603

Особенности и преимущества:

- Расширенный диапазон температур: от -40 до $+85$ °C для достижения максимальных значений рабочих характеристик

- Слой золота повышенной прочности (30 мкм) для улучшения защиты от коррозии
- Расстояние по меньшей мере 0,3 мм обеспечивает отличный результат пайки

Основные данные для заказа

Исполнение	Штекерный соединитель печатной платы, Штекеры RJ45, Cat. 5, Соединение THT под пайку, 90°, Фиксатор — опция: снизу, Выводы для экранирования: 6 tabs, 30...80 μ " Ni / ≥ 30 μ " Au, Светодиод: Нет, Количество полюсов: 8, Лоток (ручная сборка)
Номер для заказа	2562900000
Тип	RJ45C5 T1D 3.3E4N TY
GTIN (EAN)	4050118571929
Кол.	120 Шт.
Упаковка	Лоток (ручная сборка)

Дата создания 11 апреля 2021 г. 13:27:17 CEST

RJ45C5 T1D 3.3E4N TY

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Технические данные

Размеры и массы

Высота	17,06 мм	Высота (в дюймах)	0,672 inch
Высота, мин.	13,76 мм	Глубина	21,3 мм
Глубина (дюймов)	0,839 inch	Масса нетто	7,533 g
Ширина	15,7 мм	Ширина (в дюймах)	0,618 inch

Упаковка

Упаковка	Лоток (ручная сборка)	Длина VPE	0 м
VPE с	0 м	Высота VPE	0 м

Системные характеристики

Вид защиты	IP20	
Вид соединения	Гнездо	
Выводы для экранирования	6 tabs	
Диаметр монтажного отверстия (D)	0,9 мм	
Длина контактного штифта (l)	3,3 мм	
Допуск на диаметр монтажного отверстия (D)	±0,1 мм	
Допуск на длину выводов под пайку	Нижний допуск с префиксом (показывает минимум)	-0,5
	Верхний допуск с префиксом (показывает максимум)	+0,5
	Допуск, единица	mm
Допуск на длину выводов под пайку	+0,5 / -0,5 mm	
Категория	Cat. 5	
Категория эксплуатационных характеристик	Cat. 5	
Количество контактных штырьков на полюс	1	
Количество полюсов	8	
Материал экрана	Латунь	
Монтаж	8-жильный	
Монтаж на печатной плате	Соединение ТНТ под пайку	
Поверхность экрана	никелированный	
Светодиод	Нет	
Серия изделия	Данные OMNIMATE – модульный штекер RJ45	
Техпроцесс пайки	Пайка вручную, Пайка волной припоя	
Угол вывода	90°	
Фиксатор — опция	снизу	
Шаг в дюймах (P)	0,05 inch	
Шаг в мм (P)	1,27 мм	
Экранирование	Да	

Стандарты

Вилочный разъем, стандарт	IEC 60603-7-5 1
---------------------------	-----------------

Электрические свойства

Номинальное напряжение	125 V	Номинальный ток	1,5 A
Электрическая прочность, контакт / контакт	1000 V AC		

RJ45C5 T1D 3.3E4N TY

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Технические данные

Данные о материалах

Изоляционный материал	PA 66	Цветовой код	черный
Таблица цветов (аналогич.)	RAL 9011	Группа изоляционного материала	II
Сравнительный показатель пробоя (СТИ)	>= 500	Класс пожаростойкости UL 94	V-0
Основной материал контактов	Фосфористая бронза	Поверхность контакта	Золото поверх никеля
Структура слоев штепсельного контакта	30...80 µ" Ni / ≥ 30 µ" Au	Температура хранения, мин.	-40 °C
Температура хранения, макс.	85 °C	Рабочая температура, мин.	-40 °C
Рабочая температура, макс.	85 °C		

Классификации

ETIM 6.0	EC002637	ETIM 7.0	EC002637
ECLASS 9.0	27-44-04-02	ECLASS 9.1	27-44-04-02
ECLASS 10.0	27-44-04-02	ECLASS 11.0	27-46-02-01

Сертификаты

Сертификаты



ROHS	Соответствовать
UL File Number Search	E471884

Загрузки

Технические данные [STEP](#)



RJ45C5 T1D 3.3E4N TY

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Изображения


Габаритный чертеж

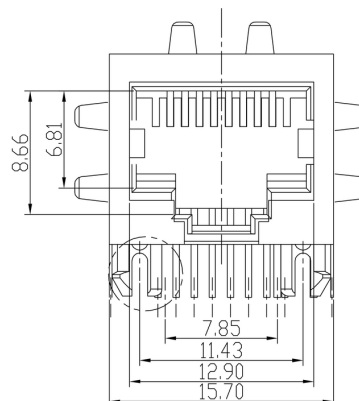


Габаритный чертеж



Габаритный чертеж



Чертеж РСВ платы

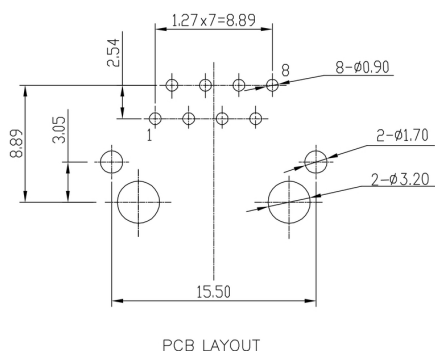

RJ45C5 T1D 3.3E4N TY

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmuller.com

Изображения

RJ45	G1	R	1	U	3.2	E	4	GY/GY	TY	RJ45G1 R1U 3.2E4GY/GY TY																																																																																																																		
										<table><tr><td>Packaging</td><td>TY</td><td>Tray in box (manual assembly)</td></tr><tr><td></td><td>RL</td><td>Tape on Reel (automated assembly)</td></tr><tr><td>LED</td><td>Y/G</td><td>Yellow/Green</td></tr><tr><td></td><td>G/Y</td><td>Green/Yellow (standard)</td></tr><tr><td></td><td>GY/GY</td><td>Green-Yellow/Green-Yellow</td></tr><tr><td></td><td>O/G</td><td>Orange/Green</td></tr><tr><td></td><td>R/O</td><td>Red/Orange</td></tr><tr><td></td><td>...</td><td>... (further combinations possible)</td></tr><tr><td></td><td>N</td><td>without LED</td></tr><tr><td>Contact surface thickness</td><td>4</td><td>1 = 3µ", 2 = 6µ", 3 = 15µ", 4 = 30µ", 5 = 50µ"</td></tr><tr><td>EMI tabs (ground fingers)</td><td>E</td><td>E = with EMI tabs</td></tr><tr><td></td><td>N</td><td>N = without EMI tabs</td></tr><tr><td>Solder Pin length</td><td>3.2</td><td>3.2 mm</td></tr><tr><td></td><td>1.6</td><td>1.6 mm</td></tr><tr><td></td><td>D</td><td>SMD</td></tr><tr><td>Direction, latch style</td><td>U</td><td>Horizontal (90°, side entry), latch up</td></tr><tr><td></td><td>D</td><td>Horizontal (90°, side entry), latch down</td></tr><tr><td></td><td>V</td><td>Vertical (180°, top entry)</td></tr><tr><td></td><td>Y</td><td>Diagonal (45°), latch up</td></tr><tr><td>Number of Ports</td><td>1</td><td>1 Port</td></tr><tr><td></td><td>12; 14; ...</td><td>multi ports side by side, Multiport</td></tr><tr><td></td><td>21; 41; ...</td><td>multi ports about each other, Multilevel</td></tr><tr><td>Assembly on PCB</td><td>R</td><td>Through Hole Reflow - THR</td></tr><tr><td></td><td>S</td><td>Soldering process: Wave or Reflow soldering</td></tr><tr><td></td><td>T</td><td>Surface Mount Technology - SMT</td></tr><tr><td></td><td>T</td><td>Soldering process: Reflow soldering</td></tr><tr><td></td><td>T</td><td>Through Hole Technology - THT</td></tr><tr><td></td><td>T</td><td>Soldering process: Wave</td></tr><tr><td>Performance Category</td><td>C5</td><td>Category 5</td></tr><tr><td></td><td>C6</td><td>Category 6</td></tr><tr><td></td><td>C6A</td><td>Category 6A</td></tr><tr><td></td><td>C5e</td><td>Category 5e</td></tr><tr><td></td><td>M</td><td>10/100 Mbit</td></tr><tr><td></td><td>G1</td><td>10/100/1000 Mbit</td></tr><tr><td></td><td>G10</td><td>10 Gbit</td></tr><tr><td></td><td>U</td><td>Unshielded</td></tr><tr><td></td><td>MP</td><td>10/100 Mbit with POE</td></tr><tr><td></td><td>MP+</td><td>10/100 Mbit with POE+</td></tr></table>	Packaging	TY	Tray in box (manual assembly)		RL	Tape on Reel (automated assembly)	LED	Y/G	Yellow/Green		G/Y	Green/Yellow (standard)		GY/GY	Green-Yellow/Green-Yellow		O/G	Orange/Green		R/O	Red/Orange		...	... (further combinations possible)		N	without LED	Contact surface thickness	4	1 = 3µ", 2 = 6µ", 3 = 15µ", 4 = 30µ", 5 = 50µ"	EMI tabs (ground fingers)	E	E = with EMI tabs		N	N = without EMI tabs	Solder Pin length	3.2	3.2 mm		1.6	1.6 mm		D	SMD	Direction, latch style	U	Horizontal (90°, side entry), latch up		D	Horizontal (90°, side entry), latch down		V	Vertical (180°, top entry)		Y	Diagonal (45°), latch up	Number of Ports	1	1 Port		12; 14; ...	multi ports side by side, Multiport		21; 41; ...	multi ports about each other, Multilevel	Assembly on PCB	R	Through Hole Reflow - THR		S	Soldering process: Wave or Reflow soldering		T	Surface Mount Technology - SMT		T	Soldering process: Reflow soldering		T	Through Hole Technology - THT		T	Soldering process: Wave	Performance Category	C5	Category 5		C6	Category 6		C6A	Category 6A		C5e	Category 5e		M	10/100 Mbit		G1	10/100/1000 Mbit		G10	10 Gbit		U	Unshielded		MP	10/100 Mbit with POE		MP+	10/100 Mbit with POE+
Packaging	TY	Tray in box (manual assembly)																																																																																																																										
	RL	Tape on Reel (automated assembly)																																																																																																																										
LED	Y/G	Yellow/Green																																																																																																																										
	G/Y	Green/Yellow (standard)																																																																																																																										
	GY/GY	Green-Yellow/Green-Yellow																																																																																																																										
	O/G	Orange/Green																																																																																																																										
	R/O	Red/Orange																																																																																																																										
	...	... (further combinations possible)																																																																																																																										
	N	without LED																																																																																																																										
Contact surface thickness	4	1 = 3µ", 2 = 6µ", 3 = 15µ", 4 = 30µ", 5 = 50µ"																																																																																																																										
EMI tabs (ground fingers)	E	E = with EMI tabs																																																																																																																										
	N	N = without EMI tabs																																																																																																																										
Solder Pin length	3.2	3.2 mm																																																																																																																										
	1.6	1.6 mm																																																																																																																										
	D	SMD																																																																																																																										
Direction, latch style	U	Horizontal (90°, side entry), latch up																																																																																																																										
	D	Horizontal (90°, side entry), latch down																																																																																																																										
	V	Vertical (180°, top entry)																																																																																																																										
	Y	Diagonal (45°), latch up																																																																																																																										
Number of Ports	1	1 Port																																																																																																																										
	12; 14; ...	multi ports side by side, Multiport																																																																																																																										
	21; 41; ...	multi ports about each other, Multilevel																																																																																																																										
Assembly on PCB	R	Through Hole Reflow - THR																																																																																																																										
	S	Soldering process: Wave or Reflow soldering																																																																																																																										
	T	Surface Mount Technology - SMT																																																																																																																										
	T	Soldering process: Reflow soldering																																																																																																																										
	T	Through Hole Technology - THT																																																																																																																										
	T	Soldering process: Wave																																																																																																																										
Performance Category	C5	Category 5																																																																																																																										
	C6	Category 6																																																																																																																										
	C6A	Category 6A																																																																																																																										
	C5e	Category 5e																																																																																																																										
	M	10/100 Mbit																																																																																																																										
	G1	10/100/1000 Mbit																																																																																																																										
	G10	10 Gbit																																																																																																																										
	U	Unshielded																																																																																																																										
	MP	10/100 Mbit with POE																																																																																																																										
	MP+	10/100 Mbit with POE+																																																																																																																										

Условные обозначения

Дата создания 11 апреля 2021 г. 13:27:17 CEST

Статус каталога 12.03.2021 / Право на внесение технических изменений сохранено.

Recommended wave soldering profiles

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Single Wave:



Double Wave:



Wave soldering profiles

Wired connection elements should be processed in accordance with the DIN EN 61760-1 standard. We have included two recommendations for practical wave soldering profiles, with which Weidmüller PCB terminals and connectors are qualified.

When choosing a suitable profile for your application, the following factors also need to be considered:

- PCB thickness
- Proportion of Cu in the layers
- Single/double-sided assembly
- Product range
- Heating and cooling rates

The single and double wave profiles each indicate the recommended operating range, including the maximum soldering temperature of 260°C. In practice, the maximum soldering temperature is quite often well below the above maximum profile.

We reserve the right to make technical changes.