

SAIE-7/8S-4-0.4U-H**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Various build-in connectors are required for the connections on the device side of the sensor/actuator cabling. These are available in the versions M12, M8 and M5.

General ordering data

Version	Built-in plugs, 7/8", 7/8", Number of poles: 4
Order No.	2577160000
Type	SAIE-7/8S-4-0.4U-H
GTIN (EAN)	4050118586817
Qty.	1 pc(s).

SAIE-7/8S-4-0.4U-H

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight	66 g
------------	------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Technical data customisable plug-in connectors

Cable glands	7/8"	Coding	none
Contact surface	Gold-plated	Housing main material	Zinc diecast, nickel-plated
Number of poles	4	Plugging cycles	≥ 100
Protection degree	IP67, when screwed in	Rated current	8 A
Rated voltage	300 V	Temperature range of housing	-25...+85 °C
Type of connection	Pin		

General data

Cable glands	7/8"	Coding	none
Conductor O.D.	-	Connection thread	7/8"
Contact material	CuZn	Contact surface	Gold-plated
Core cross-section	0.75 mm ²	Housing main material	Zinc diecast, nickel-plated
Number of poles	4	Plugging cycles	≥ 100
Protection degree	IP67, when screwed in	Rated current	8 A
Rated voltage	300 V	Strand / cable length	0.4 m
Temperature range of housing	-25...+85 °C	Type of connection	Pin

Classifications

ETIM 6.0	EC002635	ETIM 7.0	EC003570
ECLASS 9.0	27-44-01-03	ECLASS 9.1	27-44-01-03
ECLASS 10.0	27-44-01-03	ECLASS 11.0	27-44-01-03

Approvals

Approvals



ROHS	Conform
UL File Number Search	E307231

Downloads

Engineering Data	STEP
------------------	----------------------



SAIE-7/8S-4-0.4U-H

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Wiring diagram

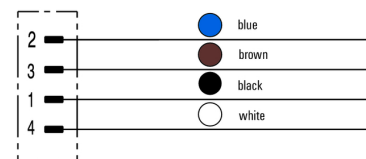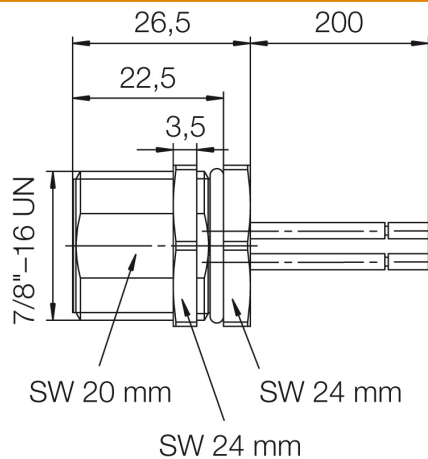

Pole scheme

