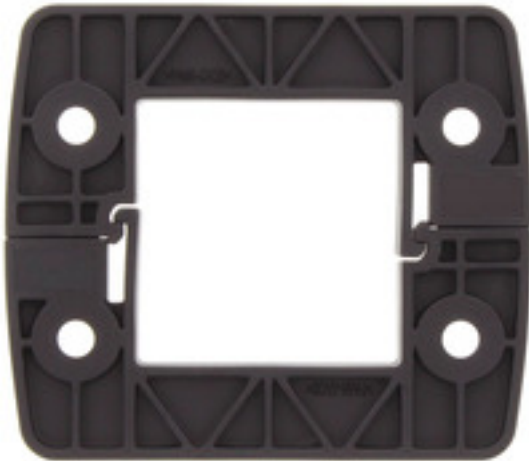


CABTITE FRL 4-1 BK**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Similar to illustration**

The frame, fabricated from a single piece, is quick and easy to assemble and consists of dimensionally stable, fibre-glass reinforced plastic. The captive foamed seal guarantees effective IP66 sealing in accordance with DIN EN 60529, even on painted and rough surfaces.

General ordering data

Version	Locking frame, Cabtite (cable entry system), Polyamide, glass fibre-reinforced, Deep black, Height: 68.8 mm, Width: 80 mm, Depth: 11.3 mm, -40 °C...120 °C
Order No.	2584260000
Type	CABTITE FRL 4-1 BK
GTIN (EAN)	4050118616200
Qty.	10 pc(s).

Creation date April 16, 2021 3:49:56 AM CEST

Catalogue status 09.04.2021 / We reserve the right to make technical changes.

CABTITE FRL 4-1 BK**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	11.3 mm	Depth (inches)	0.445 inch
Diameter	5.5 mm	Height	68.8 mm
Height (inches)	2.709 inch	Height of lowest version	11.3 mm
Mounting dimension - height	58 mm	Mounting dimension - width	32 mm
Net weight	22.88 g	Width	80 mm
Width (inches)	3.15 inch		

Temperatures

Operating temperature	-40 °C... 120 °C
-----------------------	------------------

General information

Halogen	No	Material	Polyamide, glass fibre-reinforced
Opening length	39.8 mm	Opening width	40 mm
Silicone	No	Tightening torque	3 Nm
UL 94 flammability rating	V-0		

Classifications

ETIM 6.0	EC002624	ETIM 7.0	EC002624
ECLASS 9.0	27-18-28-15	ECLASS 9.1	27-18-92-65
ECLASS 10.0	27-18-28-15	ECLASS 11.0	27-18-28-15

Approvals

Approvals



ROHS	Conform
UL File Number Search	E223801

Downloads

Engineering Data	STEP
Engineering Data	EPLAN
User Documentation	Cabtite Installation Instructions
Brochure/Catalogue	Catalogues in PDF-format

CABTITE FRL 4-1 BK

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Dimensioned drawing

