

VPU AC I 1+1 R 300/12.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Weidmüller VPU I (Type I), VPU II (Type II) and VPU III (Type III) surge protection products effectively reduce the interference coupling that can occur due to transient surge voltages, even significantly below the limits prescribed by insulation co-ordination according to EN 60664-3 / DIN VDE 0110-3. This means that the whole installation is exposed to fewer malfunctions. The arresters are co-ordinated using technical means. This means that decoupling between Types I, II and III is unnecessary. The arresters are tested according to product standard IEC 61643-11 / DIN EN 61643-11 and can be installed in systems according to IEC 61643-12 / VDE 0675-6-12 and IEC 62305-4 / VDE 0185-4. This lightning and surge protection device is suited for installation in power supply systems. Weidmüller offers different products depending on the particular mains network type and voltage level. A special Type I and Type II protective device is even available for photovoltaic applications.

General ordering data

Version	Surge voltage arrester, Low voltage, Surge protection, with remote contact, Single-phase, TN-C, TN-C-S, TN-S, TT, $U_p(L/N-PE) \leq 1.5 \text{ kV}$
Order No.	2591490000
Type	VPU AC I 1+1 R 300/12.5
GTIN (EAN)	4050118599459
Qty.	1 pc(s).

VPU AC I 1+1 R 300/12.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	91 mm	Depth (inches)	3.583 inch
Height	104.5 mm	Height (inches)	4.114 inch
Net weight	38 g	Width	36 mm
Width (inches)	1.417 inch		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

Rated data UL

Operating altitude	≤ 4000 m	Ambient temperature (operational), max. 85 °C	
Rated Voltage U _N	240 V	VPR (N-PE)	1,200 V
MCOV (L/N-PE)	300 V	MCOV (N-PE)	305 V
SCCR	150 kA	I _n	20 kA
Category	SPD TYPE 1CA	Ambient temperature (operational), min. -40 °C	
Certificate No. (cURus)	E354261	MODE	L-N, L-G, N-G
VPR (L-N)	900 V	VPR (L-PE)	1,000 V
Voltage type	AC		

Connection data, remote alert

Connection type	PUSH IN	Cross-section for connected wire, solid core, max.	1.5 mm ²
Cross-section for connected wire, solid core, min.	0.14 mm ²	Stripping length	8 mm

General data

Colour	black, orange, blue	Design	Installation housing; 2TE, Insta IP 20
Operating altitude	≤ 4000 m	Optical function display	green = OK; red = arrester is defective - replace
Protection degree	IP20 in installed state	Rail	TS 35
Segment	Power distribution	UL 94 flammability rating	V-0
Version	Surge protection, with remote contact		

Insulation coordination acc. to EN 50178

Operating altitude	≤ 4000 m	Pollution severity	2
Surge voltage category	III		

VPU AC I 1+1 R 300/12.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Rated data IEC / EN

Discharge current $I_{\max}$ (8/20 μ s) wire-PE	50 kA
Discharge current I_n (8/20 μ s) N-PE	50 kA
Energy coordination (≤ 10 m)	Type I, Type II, Type III
Frequency range, max.	60 Hz
Fuse	No Fuse necessary ≤ 315 A gG, 250 A gG @50 kA Iscrr, 315 A gG @25 kA Iscrr
Lightning test current I_{imp} (10/350 μ s) (L-PE)	12.5 kA
Low voltage network	Single-phase, TN-C, TN-C-S, TN-S, TT
Max. continuous voltage, U_c (N-PE)	305 V
Protection level U_p (typ.)	≤ 1.5 kV
Rated voltage (AC)	230 V
Requirements class, acc. to EN 61643-11	T1, T2
Short-circuit current rating I_{SCCR}	50 kA
Standards	IEC61643-11, EN61643-11
Voltage type	AC

Discharge current $I_{\max}$ (8/20 μ s) N-PE	50 kA
Discharge current I_n (8/20 μ s) wire-PE	20 kA
Follow-on current extinguishing capability I_{fi}	Not available due for technical reasons
Frequency range, min.	50 Hz
Leakage current at U_n	1 μ A
Lightning test current, I_{imp} (10/350 μ s) (N-PE)	50 kA
Max. continuous voltage, U_c (AC)	300 V
Number of poles	2
Protection level U_p at I_N (N-PE)	≤ 1.5 kV
Requirements category acc. to IEC 61643-11	Type I, Type II
Response time	≤ 25 ns, ≤ 100 ns
Signalling contact	250 V 1A 1CO
Temporary surge voltage (over-voltage) - TOV	337 V

Connection data

Wire connection method	Screw connection
Stripping length, rated connection	15 mm
Tightening torque, max.	4.5 Nm
Clamping range, min.	4 mm ²
Wire cross-section, solid, min.	2.5 mm ²
Wire connection cross section, finely stranded, min.	2.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	2.5 mm ²
Connection cross-section, stranded, min.	2.5 mm ²

Type of connection	Screw connection
Tightening torque, min.	2 Nm
Clamping range, rated connection	16 mm ²
Clamping range, max.	35 mm ²
Wire cross-section, solid, max.	35 mm ²
Wire connection cross section, finely stranded, max.	35 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), max.	35 mm ²
Connection cross-section, stranded, max.	35 mm ²

Ratings IECEx/ATEX/cUL

Certificate no. (cULus)	E354261
-------------------------	---------

Guarantee

Time interval	5 years
---------------	---------

Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ECLASS 9.0	27-13-08-05	ECLASS 9.1	27-13-08-05
ECLASS 10.0	27-13-08-05	ECLASS 11.0	27-13-08-05

VPU AC I 1+1 R 300/12.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Important note

Product information

Only applicable to IT power systems where the earth on the distribution transformer is interconnected with the earth on the consumer side (RE=RA in Figure 44.A1 of IEC 60634-4-44:2018). For use in DC applications, please use the fuse of SIBA Type NH2XL aR/aSF DC 1500 V

Approvals

Approvals



ROHS	Conform
UL File Number Search	E354261

Downloads

Approval/Certificate/Document of Conformity	EAC VPU SERIES Declaration of Conformity Declaration of Conformity Declaration of Conformity
Engineering Data	STEP
Tender specification	Ausschreibungstext DE Tenderspecification EN
User Documentation	Instruction sheet
Brochure/Catalogue	Catalogues in PDF-format


VPU AC I 1+1 R 300/12.5

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Electric symbol

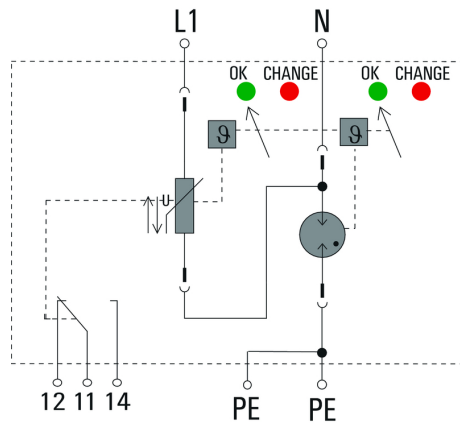

Schematic circuit diagram