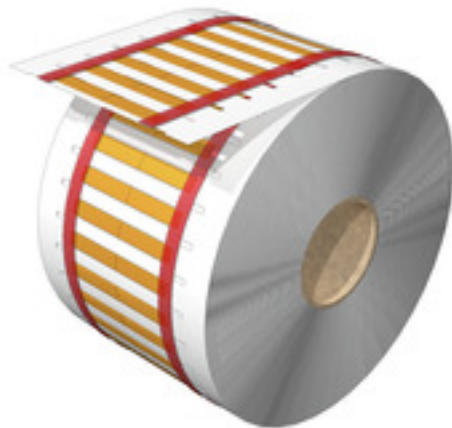


**HS-FR 1.6-3.2/25 MM Y****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

The heat-shrinkable sleeve is printable on 2 sides and can be used for marking and insulating cables and wires. The flexible, heat-shrink material enables a firm, perfect fit around the conductor and therefore saves space.

**General ordering data**

|                    |                                                                                  |
|--------------------|----------------------------------------------------------------------------------|
| Version            | Conductor and cable markers, 1.6 - 3.2 mm, 24.9 x 5.2 mm, yellow                 |
| Order No.          | <a href="#">2621590000</a>                                                       |
| Type               | HS-FR 1.6-3.2/25 MM Y                                                            |
| GTIN (EAN)         | 4050118625455                                                                    |
| Qty.               | 2,000 pc(s).                                                                     |
| compatible printer | <a href="#">2599430000</a> <a href="#">2599440000</a> <a href="#">1140490000</a> |

## HS-FR 1.6-3.2/25 MM Y

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Dimensions and weights

|                |            |                 |           |
|----------------|------------|-----------------|-----------|
| Depth          | 0.77 mm    | Depth (inches)  | 0.03 inch |
| Height         | 24.9 mm    | Height (inches) | 0.98 inch |
| Net weight     | 0.266 g    | Width           | 5.2 mm    |
| Width (inches) | 0.205 inch |                 |           |

### Temperatures

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -55...125 °C |
|-----------------------------|--------------|

### General data

|                                   |               |                                   |              |
|-----------------------------------|---------------|-----------------------------------|--------------|
| Colour                            | yellow        | Halogen                           | No           |
| Material                          | Polyolefine   | Operating temperature range       | -55...125 °C |
| Operating temperature range, max. | 125 °C        | Operating temperature range, min. | -55 °C       |
| Size of labelling field           | 5.2 x 24.9 mm | Width                             | 5.2 mm       |

### Conductor and cable markers

|                                         |                     |                                         |                           |
|-----------------------------------------|---------------------|-----------------------------------------|---------------------------|
| Conductor O.D.                          | 1.6 - 3.2 mm        | Conductor O.D., max.                    | 3.2 mm                    |
| Conductor O.D., min.                    | 1.6 mm              | Conductor cross-section, max.           | 1.5 mm <sup>2</sup>       |
| Conductor cross-section, min.           | 0.5 mm <sup>2</sup> | Cross-section for connected wire        | 0.5 - 1.5 mm <sup>2</sup> |
| Halogen                                 | No                  | Rate of shrinkage                       | 2:1                       |
| Recommended shrinking temperature       | 90 °C               | Wire connection cross section AWG, max. | AWG 16                    |
| Wire connection cross section AWG, min. | AWG 20              |                                         |                           |

### Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001530    | ETIM 7.0    | EC001530    |
| ECLASS 9.0  | 27-40-04-01 | ECLASS 9.1  | 27-40-04-01 |
| ECLASS 10.0 | 27-40-04-01 | ECLASS 11.0 | 27-28-11-02 |

### Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

### Downloads

|                    |                                          |
|--------------------|------------------------------------------|
| Engineering Data   | <a href="#">EPLAN</a>                    |
| Brochure/Catalogue | <a href="#">Catalogues in PDF-format</a> |

### HS-FR 1.6-3.2/25 MM Y

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

