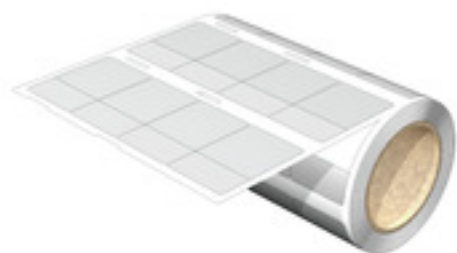


**THM WO VIN 25.4/38.1 SP WS****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

THM WriteOn cable markers on reels are used for labelling conductors and cables with an outside diameter of up to 36 mm. The transparent adhesive strip fixes and protects the printing on the marker surface.

- Protection of the marking against dirt and abrasion by wrapping it with the transparent adhesive strip
- Simple and quick printing with the high-quality thermal transfer printers

**General ordering data**

|                    |                                                                   |
|--------------------|-------------------------------------------------------------------|
| Version            | THM, Conductor and cable markers, 4 - 8 mm, 25.4 x 38.1 mm, white |
| Order No.          | <a href="#">2657170000</a>                                        |
| Type               | THM WO VIN 25.4/38.1 SP WS                                        |
| GTIN (EAN)         | 4050118675900                                                     |
| Qty.               | 400 pc(s).                                                        |
| compatible printer | <a href="#">2599430000</a> <a href="#">2599440000</a>             |

## THM WO VIN 25.4/38.1 SP WS

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                |          |                 |            |
|----------------|----------|-----------------|------------|
| Depth          | 0.065 mm | Depth (inches)  | 0.003 inch |
| Height         | 25.4 mm  | Height (inches) | 1 inch     |
| Net weight     | 0.18 g   | Width           | 38.1 mm    |
| Width (inches) | 1.5 inch |                 |            |

## Temperatures

|                             |             |
|-----------------------------|-------------|
| Operating temperature range | -40...80 °C |
|-----------------------------|-------------|

## General data

|                                   |                       |                                   |                                            |
|-----------------------------------|-----------------------|-----------------------------------|--------------------------------------------|
| Adhesive                          | Polyacrylate adhesive | Approval acc. to UL 969           | No                                         |
| Colour                            | white                 | Halogen                           | Yes                                        |
| Material                          | Vinyl film            | Number of markers per combination | 1 Label reel = Conductor and cable markers |
| Number per roll                   | 400                   | Operating temperature range       | -40...80 °C                                |
| Operating temperature range, max. | 80 °C                 | Operating temperature range, min. | -40 °C                                     |
| Printing method                   | Thermal transfer      | Type of printing                  | neutral                                    |
| UL 94 flammability rating         | V-0                   | Width                             | 38.1 mm                                    |

## Conductor and cable markers

|                                         |          |                                         |        |
|-----------------------------------------|----------|-----------------------------------------|--------|
| Conductor O.D.                          | 4 - 8 mm | Conductor O.D., max.                    | 8 mm   |
| Conductor O.D., min.                    | 4 mm     | Halogen                                 | Yes    |
| Wire connection cross section AWG, max. | AWG 6    | Wire connection cross section AWG, min. | AWG 10 |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                    |                                          |
|--------------------|------------------------------------------|
| Brochure/Catalogue | <a href="#">Catalogues in PDF-format</a> |
|--------------------|------------------------------------------|

### THM WO VIN 25.4/38.1 SP WS

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

