

VPCB PV I+II R M 1000**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

'Abbildung ähnlich'

Versatile accessories round off the surge protection range. E.g. the all-purpose measuring device V-TEST, which is used to check the function of pluggable arresters such as VSPC.

General ordering data

Order No.	2665770000
Type	VPCB PV I+II R M 1000
GTIN (EAN)	4050118686265
Qty.	20 pc(s).

VPCB PV I+II R M 1000

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	52.2 mm	Depth (inches)	2.055 inch
Height	61.6 mm	Height (inches)	2.425 inch
Net weight	20 g	Width	17.9 mm
Width (inches)	0.705 inch		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

Rated data UL

Ambient temperature (operational), max. 85 °C		Rated Voltage U_N	750 V
I_{max}	40 kA	I_n	20 kA
MODE	all modes	VPR (DC-/G)	750 Vdc
Voltage type	DC		

General data

Colour	grey	Design	miscellaneous
Protection degree	IP20	UL 94 flammability rating	V-0
Version	Miscellaneous		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Photovoltaic technical data

Conditions and requirements	EN 50539-11	Discharge current I_n (8/20 μ s)	20 kA
Discharge current, max. (8/20 μ s)	40 kA	Operating height in the grounded PV system	≤ 4000 m
PV system voltage, max. U_{cpv}	1,500 Vdc	Requirements class	Type I/II

Rated data IEC / EN

Discharge current, max. (8/20 μ s)	40 kA	Number of poles	1
Voltage type	DC		

Connection data

Type of connection	Solder connection, when screwed in
--------------------	------------------------------------

Guarantee

Time interval	5 years
---------------	---------

Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ECLASS 9.0	27-13-08-05	ECLASS 9.1	27-13-08-05
ECLASS 10.0	27-13-08-05	ECLASS 11.0	27-13-08-05

VPCB PV I+II R M 1000

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

ROHS

Conform

Downloads

Engineering Data

[STEP](#)

User Documentation

[Assembly instructions VPCB PV](#)

Brochure/Catalogue

[Catalogues in PDF-format](#)


VPCB PV I+II R M 1000

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings



Similar to illustration

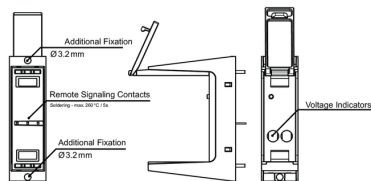

Dimensioned drawing

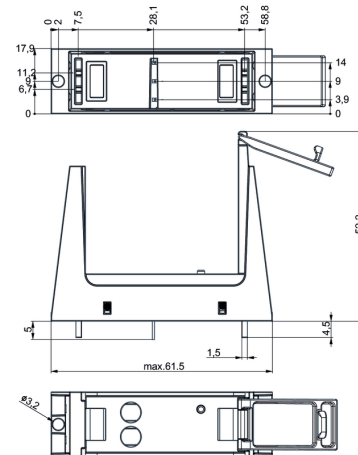

Example of use

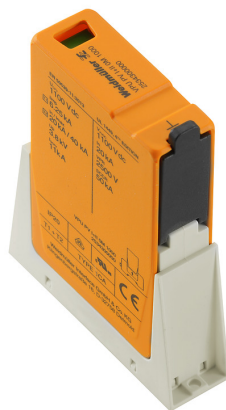

Application with arrestor

Socket type / Type d'embase / Tipo di presa / Tipo de conector / 插座类型	Überstromschutzrelais / Surge arrester / Parafoudre / Surprotecteur / 浪涌保护器
Bestellnummer / Order number / Numéro de commande / Numero ordine / 订货号	Bestellnummer / Order number / Numéro de commande / Numero ordine / 订货号
254300000	VPCB PV I+II R M 1000
254300001	VPCB PV I+II R M 1000 T1
254300002	VPCB PV I+II R M 1000 T2
254300003	VPCB PV I+II R M 1000 T3
254300004	VPCB PV I+II R M 1000 T4
254300005	VPCB PV I+II R M 1000 T5
254300006	VPCB PV I+II R M 1000 T6
254300007	VPCB PV I+II R M 1000 T7
254300008	VPCB PV I+II R M 1000 T8
254300009	VPCB PV I+II R M 1000 T9
254300010	VPCB PV I+II R M 1000 T10
254300011	VPCB PV I+II R M 1000 T11
254300012	VPCB PV I+II R M 1000 T12
254300013	VPCB PV I+II R M 1000 T13
254300014	VPCB PV I+II R M 1000 T14
254300015	VPCB PV I+II R M 1000 T15
254300016	VPCB PV I+II R M 1000 T16
254300017	VPCB PV I+II R M 1000 T17
254300018	VPCB PV I+II R M 1000 T18
254300019	VPCB PV I+II R M 1000 T19
254300020	VPCB PV I+II R M 1000 T20

1) R = Fernmeldeanlage / Remote signaling contacts / Contacts de télécommunication / Contatti di segnalazione remota / Contactos de señalización a distancia / 远端信号触点

Selection