


PRODUCT-DETAILS

MPR32/1MS

Modular Combi Plastic, 1x16A 3P+N+E, 1x32A 3P+N+E, 250x430x160, 4x2P Schuko outlet 10/16A, IP44, Disconnecter OT80F3, MCB S200 C, RCD F204 A-63/0,03

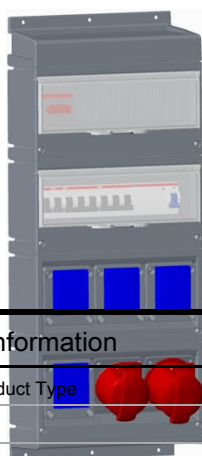

General Information

Extended Product Type	MPR32/1MS
Product ID	2CMA168984R1000
EAN	7392696689847
Catalog Description	Modular Combi Plastic, 1x16A 3P+N+E, 1x32A 3P+N+E, 250x430x160, 4x2P Schuko outlet 10/16A, IP44, Disconnecter OT80F3, MCB S200 C, RCD F204 A-63/0,03
Long Description	Modular Combi Plastic, 1x16A 3P+N+E, 1x32A 3P+N+E, 4x Schuko outlets (1P+E) 10/16A, IP44, Disconnecter OT80F3, 2x MCB S201-C16 , 1x MCB S203-C16, 1xMCB S203-C32, RCD F204 A-63/0,03, Cable entry, 4 knock-outs at the top, 2xØ40mm and 2xØ25mm, Three at the bottom 3xØ47mm

Ordering

E-Number (Sweden)	E2466363
E-Number (Finland)	3405174
E-Number (Norway)	2466363
EAN	7392696689847
Country of Origin	Czech Republic (CZ)
Minimum Order Quantity	1 piece

Dimensions

Product Net Width	250 mm
Product Net Height	560 mm
Product Net Weight	4.7 kg

Container Information

Package Level 1 Width	210 mm
Package Level 1 Depth / Length	270 mm
Package Level 1 Height	750 mm
Package Level 1 Gross Weight	4.7 kg
Package Level 1 EAN	7392696689847
Package Level 1 Units	box 1 piece
Package Level 2 Width	800 mm
Package Level 2 Depth / Length	1200 mm
Package Level 2 Height	900 mm
Package Level 2 Gross Weight	76.4 kg
Package Level 2 EAN	7392696077699
Package Level 2 Units	pallet (lift) 12 piece

Environmental

RoHS Status	Following EU Directive 2011/65/EU
-------------	-----------------------------------

Certificates and Declarations (Document Number)

Declaration of Conformity - CE	2CMC700005D0004
Environmental Information	2CMC000057M0000
RoHS Information	2CMC700005D0004
SEMKO Certificate	2CHC660099X0201
REACH Declaration	2CMC700005D0004

Additional Information

Additional Information	Cable entry, 4 knock-outs at the top, 2xØ40mm and 2xØ25mm, Three at the bottom 3xØ47mm
Ambient Temperature	-25 ... 40 °C
Cable Cross-Section	16 mm²
Cable Entry Position	Cable entry, 4 knock-outs at the top, 2xØ40mm and 2xØ25mm, Three at the bottom 3xØ47mm
Cable Length	0 m
Color	Grey
Connection Type	Screw Clamp
Degree of Protection	IP44
Frequency (f)	50 Hz

	60 Hz
Function	Combination box
Housing Material	Thermoplastic (PBT)
Invoice Description	Ind. P&S#MPR32/1MS
Mounting Type	Wall mounting
Number of Poles	5
Number of RCDs 30mA	1
Number of RCDs	1
Order Multiple	1 piece
Product Main Type	MPR
Product Name	Modular Combi
Rated Current (I_n)	32 A
Rated Voltage (U_r)	346 ... 415 V
Recommended Screw Driver	PH2
Standards	IEC 61439-1 IEC 61439-2
Suitable For	MPR32/1MS
Suitable for Product Class	IEC Industrial Plugs and Sockets
Instructions and Manuals	2CMC711001M0201
Installation Manual	2CMC000026M0001
RAL Number	RAL 7001 - Silver Grey

Classifications

eClass	27440501
UNSPSC	39121406

Categories

Low Voltage Products and Systems → Industrial Plugs and Sockets → Modular Combination Boxes

