


PRODUCT-DETAILS

CTL25S

CTL25S Ventilated Door 2PW5R w. lock

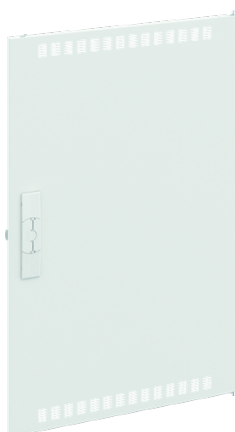

General Information

Extended Product Type	CTL25S
Product ID	2CPX052379R9999
EAN	4011617523796
Catalog Description	CTL25S Ventilated Door 2PW5R w. lock
Long Description	Ventilated sheet steel door, with standard lock CZT1 for wall-mounting cabinets and compact distribution boards, panel width 2, 5 grid units, powder coated, color: RAL 9016.

Ordering

EAN	4011617523796
Minimum Order Quantity	1 piece
Customs Tariff Number	85389099

Dimensions

Product Net Width	521 mm
Product Net Height	771 mm
Product Net Depth / Length	14 mm
Product Net Weight	3.577 kg

Container Information

Package Level 1 Units	pack 1 piece
Package Level 1 Width	550.000 mm
Package Level 1 Height	800.000 mm
Package Level 1 Depth / Length	30.000 mm
Package Level 1 Gross Weight	3.72 kg
Package Level 1 EAN	4011617523796

Additional Information

Color	traffic white
Degree of Protection	IP30
Enclosure Type	Door
Field Width	2
Product Main Type	ComfortLine
Product Name	CTL25S Ventilated Door 2PW5R w. lock

Certificates and Declarations (Document Number)

Declaration of Conformity - CE	No declaration needed
Instructions and Manuals	2CPC133152M5601

Classifications

ETIM 6	EC000747 - Door/operating panel (switchgear cabinet)
ETIM 7	EC000747 - Door/operating panel (switchgear cabinet)
Object Classification Code	U
WEEE Category	Product Not in WEEE Scope

Categories

Low Voltage Products and Systems → Enclosures → Sub Distribution Boards → Compact Distribution Boards - Modules Assembled → Accessories ComfortLine Cabinets

Low Voltage Products and Systems → Enclosures → Sub Distribution Boards → Meter Boards → Accessories ComfortLine Cabinets

Low Voltage Products and Systems → Enclosures → Sub Distribution Boards → Sub Distribution Boards → Accessories ComfortLine Cabinets

