


PRODUCT-DETAILS

OVR T2 3N 40-275s P TS QS

OVR T2 3N 40-275s P TS QS Surge Protective Device

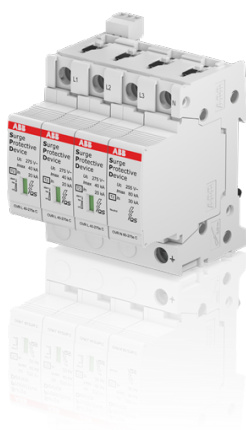

General Information

Extended Product Type	OVR T2 3N 40-275s P TS QS
Product ID	2CTB815704R0800
EAN	3660308525260
Catalog Description	OVR T2 3N 40-275s P TS QS Surge Protective Device
Long Description	Surge protective devices SPD type 2 protect low-voltage consumer systems against surge voltages as they are tested as SPD type 2 according to IEC 61643-11. The devices are compatible with the System pro M compact series. The SPD with "TS" are optionally equipped with a auxiliary contact. The variants with "reserve varistor" (s) offer additional protection for the system, as the SPD is not completely disconnected from the mains at the end of its service life, but with an additional smaller varistor still guarantees basic protection and the system thus until the surge arrester is replaced is still protected

Technical

Type of Low Voltage Distribution System	TT TN-S
Nominal AC Voltage of the System (U_0)	230 / 400 V
Number of Protected Poles	4
Arrester Class	II
Product Main Type	T2
Standards	IEC 61643-11 / EN 61643-11
Product Type	QS
Version	Plug-in

Discharge Current	Nominal 20 kA Maximum 40 kA Total 80 kA
Impulse Current	I (imp, 10 / 350 µs) 2 kA
Maximum Continuous Operating Voltage (U _c)	(L-PE) 275 V (L-L) 440 V (L-N) 275 V (N-PE) 275 V
Voltage Rating DC	350 V
Voltage Protection Level (Up)	(L-N) 1.4 kV (N-PE) 1.4 kV (L-PE) 1.5 kV
Short Circuit Withstand I _{cc}	100 kA
Temporary Overvoltage Test Value (U _T)	(L-N) 337 V (N-PE) 1200 V
Short-Circuit Protective Devices	Curve B Breakers ≤ 125 A Curve C Breakers ≤ 125 A gL Type Fuses ≤ 160 A gG Type Fuses ≤ 160 A
Auxiliary Circuit Load	Minimum 12Vdc - 10mA Maximum 250Vac - 1A
Power Loss	49 mW
Product Name	Surge Protective Device
Suitable For	To protect the systems against the transient overvoltage (lightning)

Dimensions

Product Net Width	71.2 mm
Product Net Depth / Length	76.7 mm
Product Net Height	95.8 mm
Product Net Weight	0.6 kg
Width in Number of Modular Spacings	4

Container Information

Package Level 1 Units	box 1 piece
Package Level 1 Width	117 mm
Package Level 1 Depth / Length	77 mm
Package Level 1 Height	82 mm
Package Level 1 Gross Weight	630 g
Package Level 1 EAN	3660308525260

Ordering

Minimum Order Quantity	1 piece
Customs Tariff Number	85363090

Certificates and Declarations (Document Number)

CQC Certificate	9AKK107680A1974
Declaration	2CTC432056G1701
Declaration of Conformity - CE	9AKK107992A0892
Instructions and Manuals	2CTC432106M1701

Popular Downloads	
Data Sheet, Technical Information	2CTC432308D0201
Instructions and Manuals	2CTC432106M1701
Mechanical Drawings	2CTC800015F1200.pdf 2CTC800015F1201.dxf 2CTC800015F1202.stp 2CTC800015F1203.igs

Classifications	
Object Classification Code	141DCC
ETIM 4	EC000941 - Surge protection device for power supply systems
ETIM 5	EC000941 - Surge protection device for power supply systems
ETIM 6	EC000941 - Surge protection device for power supply systems
ETIM 7	EC000941 - Surge protection device for power supply systems

Categories
Low Voltage Products and Systems → Modular DIN Rail Products → Surge Protective Devices SPDs → Surge Protective Devices SPD Class II

