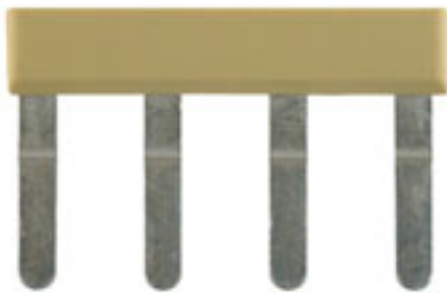


**QB 2 MK3****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Similar to illustration

**Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

**General ordering data**

|            |                            |
|------------|----------------------------|
| Order No.  | <a href="#">3833700000</a> |
| Type       | QB 2 MK3                   |
| GTIN (EAN) | 4008190542535              |
| Qty.       | 20 pc(s).                  |

## QB 2 MK3

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                |            |                 |            |
|----------------|------------|-----------------|------------|
| Height         | 12.24 mm   | Height (inches) | 0.482 inch |
| Net weight     | 0.75 g     | Width           | 14.5 mm    |
| Width (inches) | 0.571 inch |                 |            |

## Temperatures

|                     |                |
|---------------------|----------------|
| Storage temperature | -25 °C...55 °C |
|---------------------|----------------|

## Material data

|        |       |
|--------|-------|
| Colour | black |
|--------|-------|

## Additional technical data

|                |         |
|----------------|---------|
| Type of fixing | Plugged |
|----------------|---------|

## Cross-connector

|                                     |   |      |                 |
|-------------------------------------|---|------|-----------------|
| Number of cross-connected terminals | 2 | Type | Cross-connector |
|-------------------------------------|---|------|-----------------|

## Dimensions

|                 |       |
|-----------------|-------|
| Pitch in mm (P) | 10 mm |
|-----------------|-------|

## General

|                 |   |
|-----------------|---|
| Number of poles | 2 |
|-----------------|---|

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000489    | ETIM 7.0    | EC000489    |
| ECLASS 9.0  | 27-14-11-40 | ECLASS 9.1  | 27-14-11-40 |
| ECLASS 10.0 | 27-14-11-40 | ECLASS 11.0 | 27-14-11-40 |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                    |                                                 |
|--------------------|-------------------------------------------------|
| Engineering Data   | <a href="#">STEP</a>                            |
| Engineering Data   | <a href="#">EPLAN</a>                           |
| User Documentation | <a href="#">StorageConditionsTerminalBlocks</a> |