


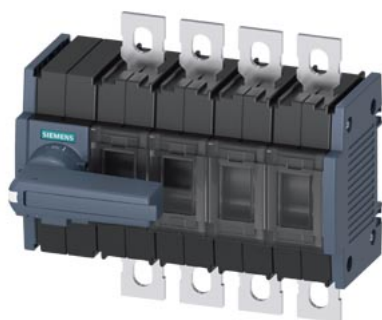

Switch disconnecter 160 A, Size 2, 4-pole Front operating mechanism left
Complete unit with direct operating mechanism gray flat terminal incl.
phase barriers

Model	
product brand name	SENTRON
product designation	3KD switch disconnecter
design of the product	Switch
display version for switch position indicator manual operation	ON-OFF-TEST
design of the actuating element	Long rotary knob
type of the driving mechanism	Front operating mechanism
type of the driving mechanism motor drive	No
General technical data	
number of poles	4
type of device	fixed mounting
size of switch disconnecter	2
mechanical service life (operating cycles) typical	15 000
electrical endurance (operating cycles)	
• at AC-23 A at 690 V	1 500
• at DC-23 A at 440 V	1 000
I ² t value	
• with closed switch at 1000 V for combination switch +gG/aM SITOR fuse maximum	19 815 A ² ·s
• of the fuse at 500 V maximum permissible	223 005 A ² ·s
• of the gG fuse at 690 V maximum permissible	226 005 A ² ·s
• of the gG/aM SITOR fuse at 1000 V maximum permissible	48 000 A ² ·s
• of the molded case circuit breaker at 415 V maximum permissible	1 750 000 A ² ·s
position of the switch operating mechanism	at the left end
overvoltage in percent relative to the operating voltage at AC at 400, 500, 690 V at 50/60 Hz	10 %
overvoltage category	III
degree of pollution	3
Voltage	
operating voltage with current paths in series	
• with degree of pollution 2 at DC rated value	440 V / 3
• with degree of pollution 3 at DC rated value	440 V / 3
insulation voltage	
• rated value	1 000 V
surge voltage resistance rated value	8 kV
Protection class	
protection class IP	IP00
protection class IP	
• with closed switch with cover or cable lug cover	IP20

- on the front

IP00

Dissipation

power loss [W]

- with conventional rated thermal current per pole 4.6 W
- with conventional rated thermal current per device 18.4 W
- for rated value of the current at AC in hot operating state per pole 4.6 W

Main circuit

operating power

- at AC-23 A at 500 V rated value 110 kW

operational current rated value

160 A

Auxiliary circuit

- number of connected NC contacts for auxiliary contacts 0
- number of connected NO contacts for auxiliary contacts 0
- number of connected CO contacts for auxiliary contacts 0
- number of CO contacts for auxiliary contacts 4
- number of NC contacts for auxiliary contacts 0
- number of NO contacts for auxiliary contacts 0

Suitability

suitability for use

- main switch Yes
- switch disconnecter Yes
- EMERGENCY OFF switch No
- safety switch Yes
- maintenance/repair switch Yes

Product details

product component

- trip indicator No
- voltage trigger No
- undervoltage release No
- undervoltage release with leading contact No

product extension auxiliary switch

Yes

product extension optional

- motor drive No
- voltage trigger No

Short circuit

short-time withstand current (I_{cw}) at 1000 V AC/440 V DC limited to 1 s rated value

4 kA

short-circuit current making capacity (I_{cm}) for switch disconnecter

- at 400 V AC without fuse link rated value minimum 30 kA
- at 1000 V AC without fuse link rated value minimum 12 kA
- at DC 440 V without fuse link rated value minimum 12 kA
- without fuse link rated value minimum 12 kA

conditional short-circuit current with line-side fuse protection

- at 415 V by molded case circuit breaker rated value 65 kA
- at 500 V by gG fuse rated value 100 kA
- at 690 V by gG fuse rated value 100 kA

Connections

type of connectable conductor cross-sections for aluminum conductor

- stranded with lug 1x (10 ... 70 mm²)

type of connectable conductor cross-sections

- with combination of Al conductor+switch 130A / 70 mm²
- for copper busbar '1x (20x3 mm²)

type of connectable conductor cross-sections for copper conductor

- stranded with lug according to DIN 46234 1x (2.5 ... 95 mm²), 2x (25 ... 50 mm²)
- stranded with lug according to DIN 46235 1x (25 ... 70 mm²), 2x (25 ... 50 mm²)

type of electrical connection for main current circuit

flat connector

Mechanical Design

height

168 mm

width	148 mm
depth	97 mm
fastening method	Screw fixing and standard rail mounting 35 mm
fastening method	
• 4-hole front mounting	No
• front mounting with central attachment	No
• rail mounting	Yes
mounting position	any
net weight	1 339 g

Environmental conditions

ambient temperature during operation	
• minimum	-25 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-50 °C
• maximum	80 °C

Certificates

reference code according to IEC 81346-2	Q
---	---

General Product Approval	Declaration of Conformity
--------------------------	---------------------------

[Confirmation](#)



[Miscellaneous](#)



Declaration of Conformity	Marine / Shipping	other	Environment
---------------------------	-------------------	-------	-------------



[Confirmation](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KD3442-0NE10-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3KD3442-0NE10-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)




http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD3442-0NE10-0

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

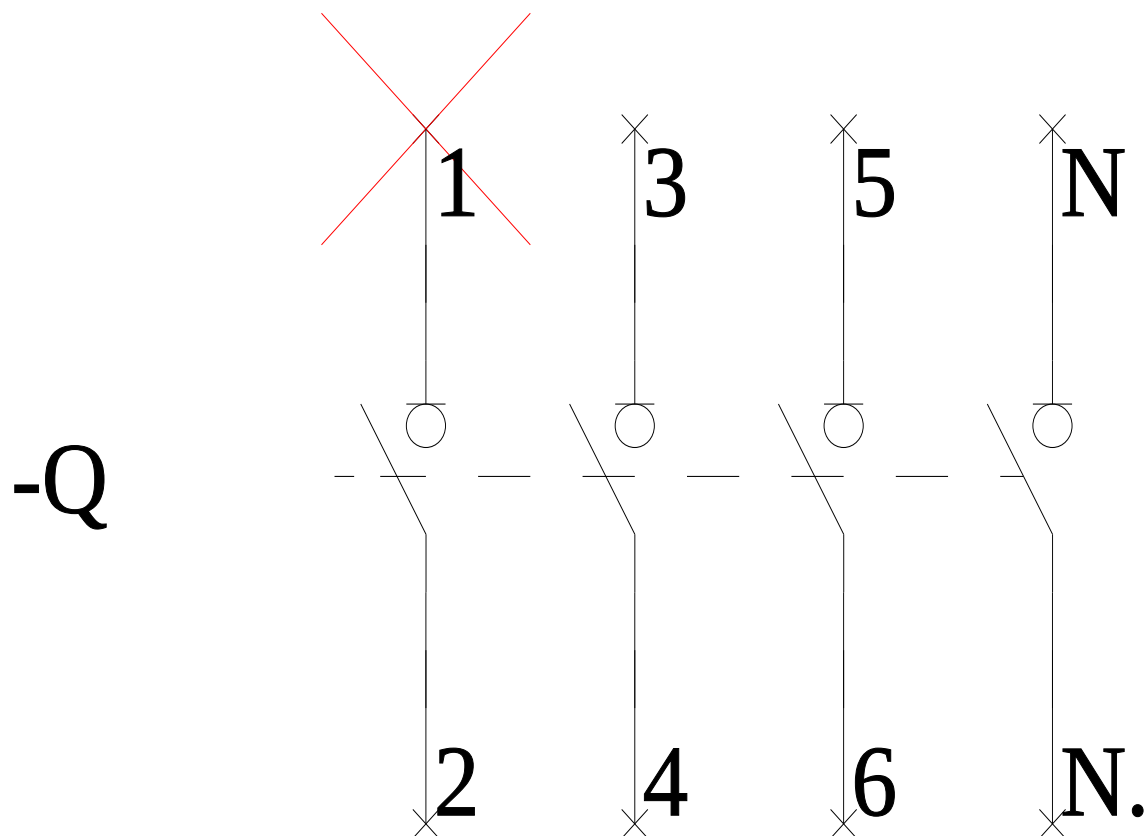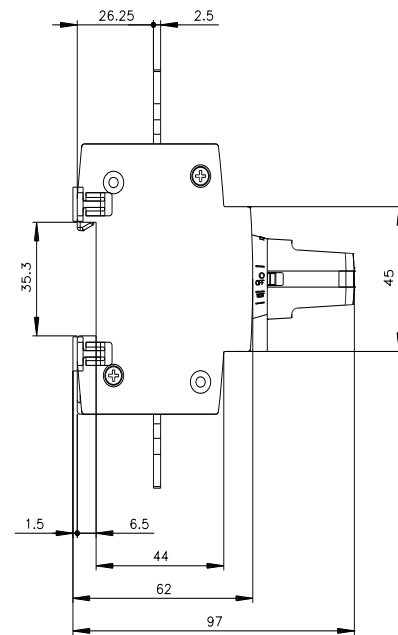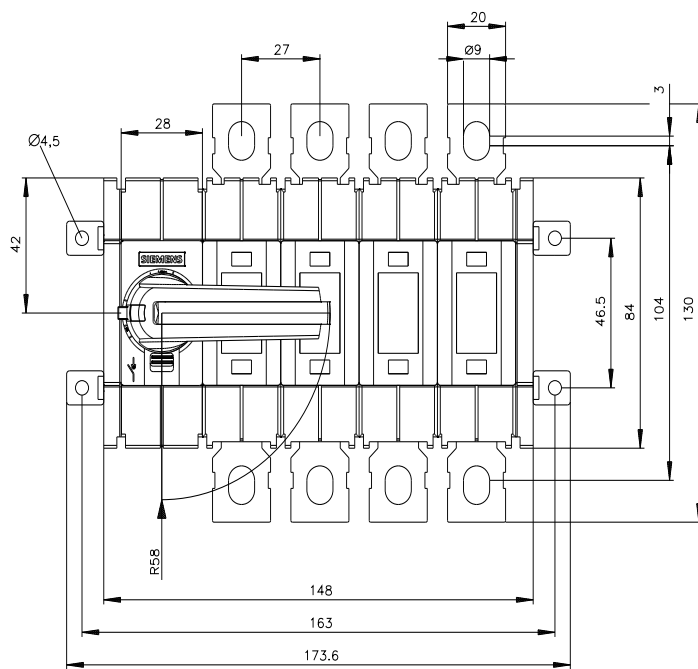

-CR

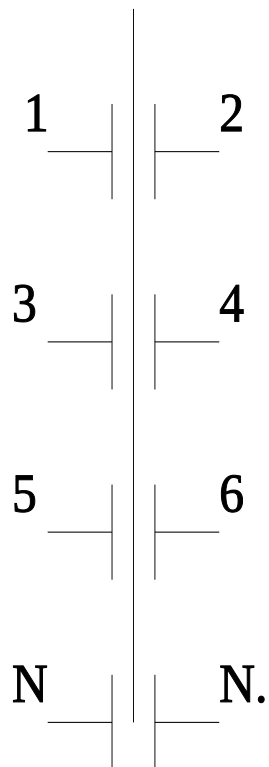

last modified:

8/1/2022 

