

Switch disconnecter 315 A, Size 3, 3-pole Front operating mechanism left Basic unit without handle flat terminal



Model	
Product brand name	SETRON
Product designation	3KD switch disconnecter
Design of the product	Switch
Display version / for switch position indicator door-coupling rotary operating mechanism	ON-OFF
Design of the operating mechanism	Without handle
Type of the driving mechanism / motor drive	No

General technical data	
Number of poles	3
Type of device	fixed mounting
Size of switch disconnecter	3
Electrical endurance (switching cycles)	
at AC-23 A / at 690 V / at 50/60 Hz	1 000
at DC-23 A / at 440 V	1 000
I_{2t} value / with closed switch / for combination switch + fuse / at 500 V / maximum	1 165 000 A ² ·s
I_{2t} value / with closed switch / for combination switch + fuse / at 400 V / maximum	1 165 000 A ² ·s

• I2t value / with closed switch / at 690 V / for combination switch + gG fuse / maximum	1 157 500 A ² ·s
• I2t value / with closed switch / at 690 V / for combination switch + aM fuse / maximum	1 267 900 A ² ·s
• I2t value / of the fuse / at 500 V / maximum permissible	2 150 005 A ² ·s
• I2t value / of the gG fuse / at 690 V / maximum permissible	1 650 005 A ² ·s
circuit-breaker / Design	3KD4
Mechanical service life (switching cycles) / typical	10 000
Position / of the switch operating mechanism	at the left end
Overvoltage category	IV

Voltage

Operating voltage / with current paths in series	
• with degree of pollution 2 / at DC / rated value	440 V / 3
• with degree of pollution 3 / at DC / rated value	440 / 3
Insulation voltage	
• rated value	1 000 V
Surge voltage resistance / rated value	12 kV
Overvoltage in percent / relative to the operating voltage / at AC / at 50/60 Hz	10 %
Current / at AC / rated value	315 A
Operating voltage	
• at AC / at 50/60 Hz / rated value	690 V

Protection class

Protection class IP	IP00
Protection class IP	
• with closed switch / with cover or cable lug cover	IP20
• on the front	IP00

Dissipation

Power loss [W]	
• with conventional rated thermal current / per pole	10 W
• with conventional rated thermal current / per device	30 W
• for rated value of the current / at AC / in hot operating state / per pole	10 W

Current

Operating current	
• at AC-21 A / at 400 V / maximum	315 A
• at AC-21 A / at 500 V / maximum	315 A

• at AC-21 A / at 690 V / maximum	315 A
• at AC-23 A / at 500 V / at 50/60 Hz / rated value / maximum	315 A
• at AC-22 A / at 500 V / at 50/60 Hz / rated value / maximum	315 A
• at AC-22 A / at 400 V / at 50/60 Hz / rated value / maximum	315 A
• at AC-22 A / at 690 V / at 50/60 Hz / rated value / maximum	315 A
• at AC-23 A / at 400 V / at 50/60 Hz / rated value / maximum	315 A
• at AC-23 A / at 690 V / at 50/60 Hz / rated value / maximum	315 A
• at DC-23 A / at 440 V / rated value / maximum	315 / 3
• at DC-23 A / at 220 V / rated value / maximum	315 / 2
• at DC-22 A / at 440 V / rated value / maximum	315 / 3
• at DC-22 A / at 220 V / rated value / maximum	315 / 2
• at DC-21 A / at 440 V / rated value / maximum	315 / 3
• at DC-21 A / at 220 V / maximum	315 / 2
Continuous current	
• rated value	315 A
• at 40 °C / rated value	315 A
• at 45 °C / rated value	315 A
• at 50 °C / rated value	315 A
• at 55 °C / rated value	315 A
• at 60 °C / rated value	315 A
• at 65 °C / rated value	315 A
• at 70 °C / rated value	315 A
Continuous current / at DC / rated value	315 A
Let-through current / of the fuse / at 500 V / maximum permissible	34 348 A
Let-through current / of the gG fuse / at 690 V / maximum permissible	33 005 A
Let-through current / with closed switch	
• at 690 V / for combination switch + aM fuse / maximum permissible	27 300 A
• at 690 V / for combination switch + gG fuse / maximum permissible	27 960 A
• for combination switch + fuse / at 400 V / maximum permissible	35 200 A
• for combination switch + fuse / at 500 V / maximum permissible	35 200 A
Short-time current resistance (Icw)	

- at 690 V AC/440 V DC / limited to 1 s / rated value

13 kA

Main circuit

Operating power

- at AC-23 A / at 400 V / at 50/60 Hz / rated value
- at AC-23 A / at 500 V / at 50/60 Hz / rated value
- at AC-23 A / at 690 V / at 50/60 Hz / rated value

160 kW

200 kW

315 kW

Auxiliary circuit

Number of connected NC contacts / for auxiliary contacts

0

Number of connected NO contacts / for auxiliary contacts

0

Number of connected CO contacts / for auxiliary contacts

0

Number of CO contacts / for auxiliary contacts

0

Number of NC contacts / for auxiliary contacts

6

Number of NO contacts / for auxiliary contacts

6

Suitability

Suitability for use

- Main switch
- switch disconnecter
- EMERGENCY OFF switch
- safety switch
- maintenance/repair switch

Yes

Yes

Yes

Yes

Yes

Product details

Product feature / interlock

No

Product component

- Trip indicator
- Voltage trigger
- undervoltage release
- undervoltage release with leading contact

No

No

No

No

Product extension

- Auxiliary switch
- optional
 - motor drive
 - Voltage trigger

Yes

No

No

Short circuit

Short-circuit current making capacity (Icm)

- for switch disconnecter / at 690 V AC/440 V DC / without fuse link / rated value / minimum

26 kA

• for switch disconnecter / without fuse link / rated value / minimum	26 kA
Conditional short-circuit current / with line-side fuse protection	
• at 500 V / by gG fuse / rated value	65 kA

Connections

• Type of connectable conductor cross-sections / for aluminum conductor / stranded / with lug	1x (25 ... 240 mm ²), 2x (25 ... 120 mm ²)
• Type of connectable conductor cross-sections / for copper conductor / stranded / with lug / acc. to DIN 46235	1x (16 ... 185 mm ²), 2x (16 ... 150 mm ²)
Type of electrical connection	
• for main current circuit	flat connector

Mechanical Design

Height	164 mm
Width	190 mm
Depth	93.5 mm
Mounting type	screw fixing
Mounting type	
• front mounting with 4-hole attachment	No
• front mounting with central attachment	No
• rail mounting	No
Mounting position	any
Net weight	2 800 g
• during operation	-25 ... +70 °C
• during storage	-50 ... +80 °C

Certificates

Reference code	
• acc. to DIN EN 61346-2	Q
• acc. to DIN EN 81346-2	Q

General Product Approval	Declaration of Conformity	Shipping Approval	other
--------------------------	---------------------------	-------------------	-------



CCC



VDE

[Miscellaneous](#)



EG-Konf.



LRS

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KD4030-0PE10-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3KD4030-0PE10-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD4030-0PE10-0

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

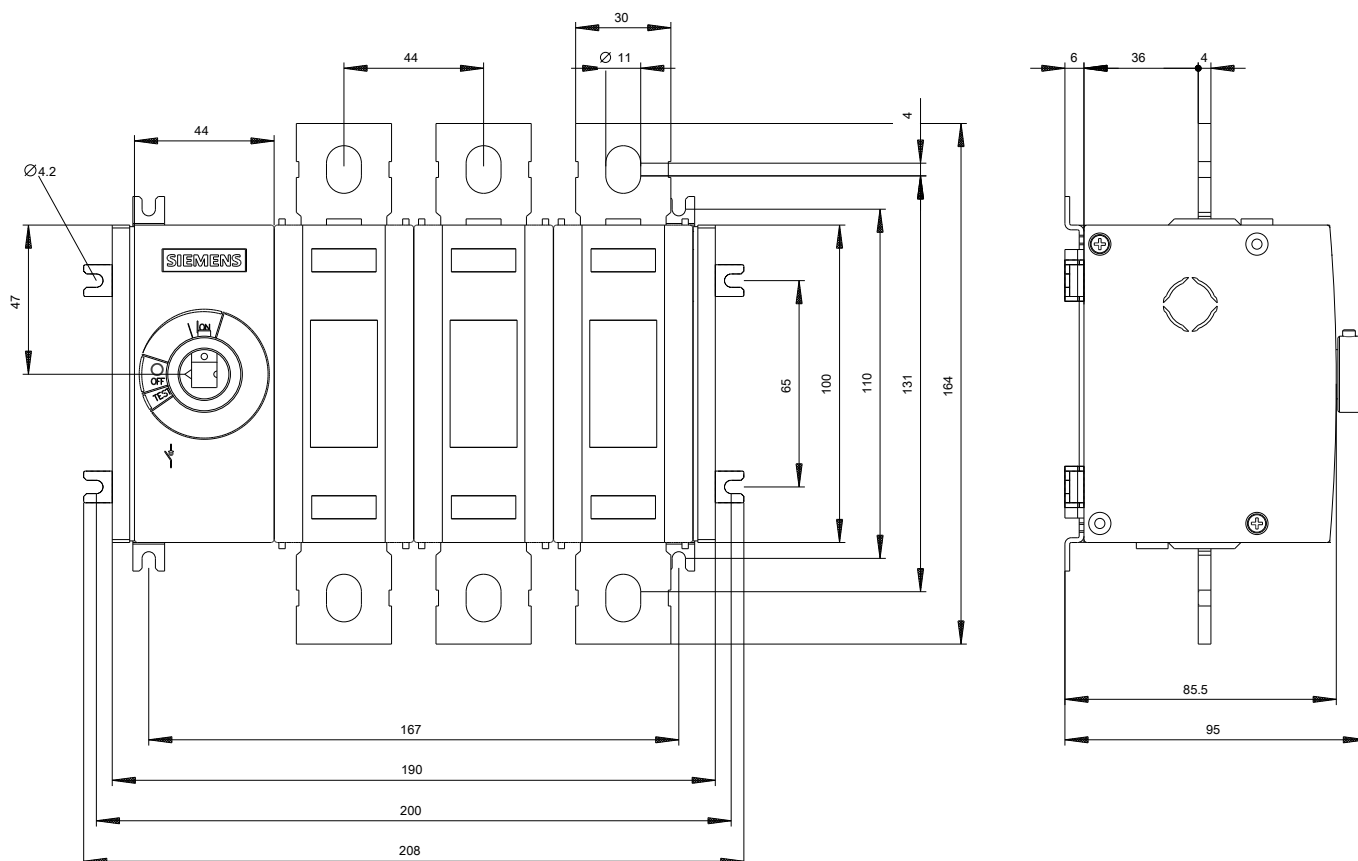

-Q

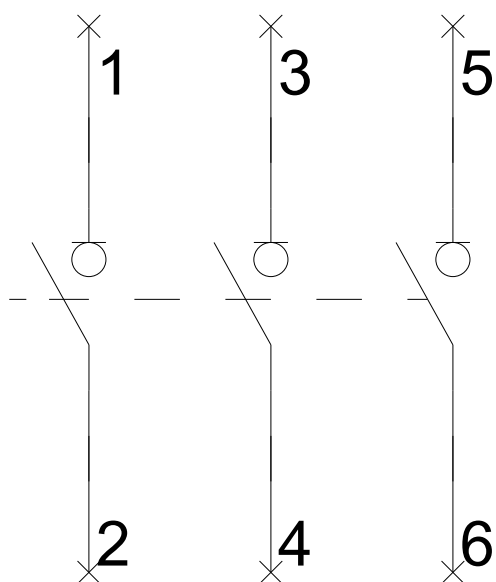

-CR

