

Switch disconnecter 400 A, Size 3, 4-pole Front operating mechanism left Basic unit without handle flat terminal



Model	
Product brand name	SENTRON
Product designation	3KD switch disconnecter
Design of the product	Switch
Display version / for switch position indicator door-coupling rotary operating mechanism	ON-OFF
Design of the operating mechanism	Without handle
Type of the driving mechanism / motor drive	No

General technical data	
Number of poles	4
Type of device	fixed mounting
Size of switch disconnecter	3
Electrical endurance (switching cycles)	
at AC-23 A / at 690 V / at 50/60 Hz	1 000
at DC-23 A / at 440 V	1 000
I²t value / with closed switch / for combination switch + fuse / at 500 V / maximum	1 165 000 A ² ·s
I²t value / with closed switch / for combination switch + fuse / at 400 V / maximum	1 165 000 A ² ·s

• I_{2t} value / with closed switch / at 690 V / for combination switch + gG fuse / maximum	1 157 500 A ² ·s
• I_{2t} value / with closed switch / at 690 V / for combination switch + aM fuse / maximum	1 267 900 A ² ·s
• I_{2t} value / of the fuse / at 500 V / maximum permissible	2 150 005 A ² ·s
• I_{2t} value / of the gG fuse / at 690 V / maximum permissible	1 650 005 A ² ·s
circuit-breaker / Design	3KD4
Mechanical service life (switching cycles) / typical	10 000
Position / of the switch operating mechanism	at the left end
Overvoltage category	IV

Voltage

Operating voltage / with current paths in series	
• with degree of pollution 2 / at DC / rated value / Note	440 V / 3
• with degree of pollution 3 / at DC / rated value / Note	440 / 3
Insulation voltage	
• rated value	1 000 V
Surge voltage resistance / rated value	12 kV
Overvoltage in percent / relative to the operating voltage / at AC / at 50/60 Hz	10 %

Protection class

Protection class IP	IP00
Protection class IP	
• with closed switch / with cover or cable lug cover	IP20
• on the front	IP00

Dissipation

Power loss [W]	
• with conventional rated thermal current / per pole	14 W
• with conventional rated thermal current / per device	56 W
• for rated value of the current / at AC / in hot operating state / per pole	14 W

Electricity

Operating current	
• at AC-21 A / at 400 V / maximum	400 A
• at AC-21 A / at 500 V / maximum	400 A
• at AC-21 A / at 690 V / maximum	400 A

• at AC-23 A / at 500 V / at 50/60 Hz / rated value / maximum	350 A
• at AC-22 A / at 500 V / at 50/60 Hz / rated value / maximum	400 A
• at AC-22 A / at 400 V / at 50/60 Hz / rated value / maximum	400 A
• at AC-22 A / at 690 V / at 50/60 Hz / rated value / maximum	400 A
• at AC-23 A / at 400 V / at 50/60 Hz / rated value / maximum	400 A
• at AC-23 A / at 690 V / at 50/60 Hz / rated value / maximum	315 A
Current / at AC / rated value	400 A
Continuous current	
• rated value	400 A
• at 40 °C / rated value	400 A
• at 45 °C / rated value	400 A
• at 50 °C / rated value	400 A
• at 55 °C / rated value	400 A
• at 60 °C / rated value	400 A
• at 65 °C / rated value	400 A
• at 70 °C / rated value	400 A
Continuous current / at DC / rated value	400 A
Let-through current / of the fuse / at 500 V / maximum permissible	34 348 A
Let-through current / of the gG fuse / at 690 V / maximum permissible	33 005 A
Let-through current / with closed switch	
• at 690 V / for combination switch + aM fuse / maximum permissible	27 300 A
• at 690 V / for combination switch + gG fuse / maximum permissible	27 960 A
• for combination switch + fuse / at 400 V / maximum permissible	35 200 A
• for combination switch + fuse / at 500 V / maximum permissible	35 200 A
Short-time current resistance (I _{cw})	
• at 690 V AC/440 V DC / limited to 1 s / rated value	13 kA

Main circuit

Operating power	
• at AC-23 A / at 400 V / at 50/60 Hz / rated value	200 kW
• at AC-23 A / at 500 V / at 50/60 Hz / rated value	250 kW
• at AC-23 A / at 690 V / at 50/60 Hz / rated value	315 kW

Operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Auxiliary circuit	
Number of connected NC contacts / for auxiliary contacts	0
Number of connected NO contacts / for auxiliary contacts	0
Number of connected CO contacts / for auxiliary contacts	0
Number of CO contacts / for auxiliary contacts	0
Number of NC contacts / for auxiliary contacts	6
Number of NO contacts / for auxiliary contacts	6
Suitability	
Suitability for use	
• Main switch	Yes
• switch disconnecter	Yes
• EMERGENCY OFF switch	Yes
• safety switch	Yes
• maintenance/repair switch	Yes
Product details	
Product feature / interlock	No
Product component	
• Trip indicator	No
• Voltage trigger	No
• undervoltage release	No
• undervoltage release with leading contact	No
Product extension	
• Auxiliary switch	Yes
• optional	
— motor drive	No
— Voltage trigger	No
Short circuit	
Short-circuit current making capacity (I _{cm})	
• for switch disconnecter / at 690 V AC/440 V DC / without fuse link / rated value / minimum	26 kA
• for switch disconnecter / without fuse link / rated value / minimum	26 kA
Conditional short-circuit current / with line-side fuse protection	
• at 500 V / by gG fuse / rated value	65 kA
Connections	

- Type of connectable conductor cross-sections / for aluminum conductor / stranded / with lug
- Type of connectable conductor cross-sections / for copper conductor / stranded / with lug / acc. to DIN 46235

1x (25 ... 240 mm²), 2x (25 ... 120 mm²)

1x (16 ... 185 mm²), 2x (16 ... 150 mm²)

Type of electrical connection

- for main current circuit

flat connector

Mechanical Design

Height 164 mm

Width 234 mm

Depth 93.5 mm

Mounting position any

Mounting type screw fixing

Mounting type

- front mounting with 4-hole attachment
- front mounting with central attachment
- rail mounting

No

No

No

Net weight 3 400 g

Environmental conditions

Degree of pollution 3

Ambient temperature

- during operation / minimum
- during operation / maximum
- during storage / minimum
- during storage / maximum

-25 °C

70 °C

-50 °C

80 °C

Certificates

Reference code

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

Q

Q

General Product Approval

Declaration of Conformity

Shipping Approval



CCC



VDE

[Miscellaneous](#)



EG-Konf.



LRS

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KD4240-0PE10-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3KD4240-0PE10-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD4240-0PE10-0

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

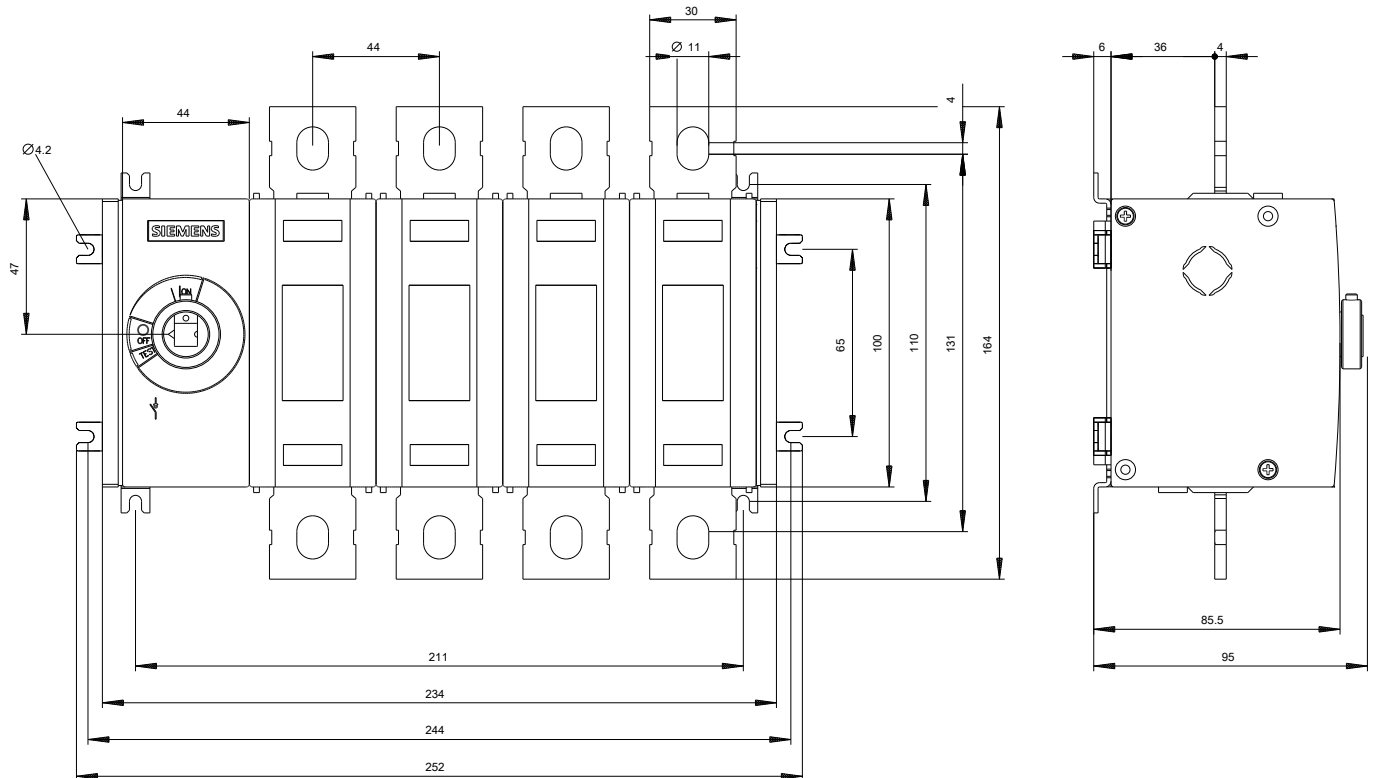

-Q

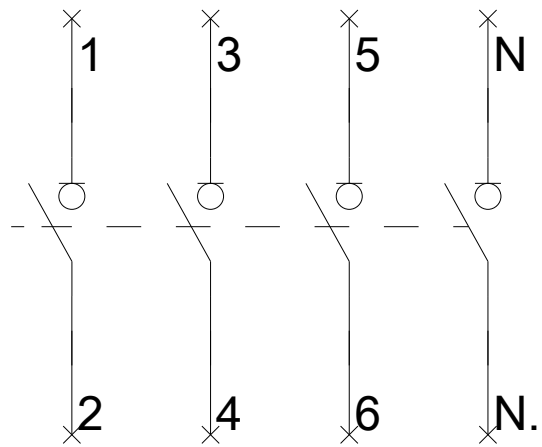

-CR

